

USB

M / N CR03IC



1.

CR03IC IC IC

2.

I


I T = 0 T = 1 CPU

I USB Android

3.

	USB RS232
	-20° 60°C 0° 50°C
	15 85
	116mm x 36mm x 38.4mm
IC	
	> 200,000
	0.75mm
IC	20
IC	50
	25

□□□□	AT24C01A / 24C02 / 24C04 / 24C08 / 24C16 / AT24C64□SLE4432 / 4442□SLE4418 / 4428□ ISSI 24C01A / 16□ISO7816-□1-4□T = 1□T = 0□
□□	
□□□□	ISO 7811□AMMV□CADMV□□□
□□□□	3□60□□/□
□□□□	> 600,000
□□pos□	□3□
□□□	0.76□1.2□□
□□□□	7□□
RFID□□□□□□	
□□□□	13.56MHz ISO / IEC14443A / B
□□□□	> 600,000
□□□□	1-4□□

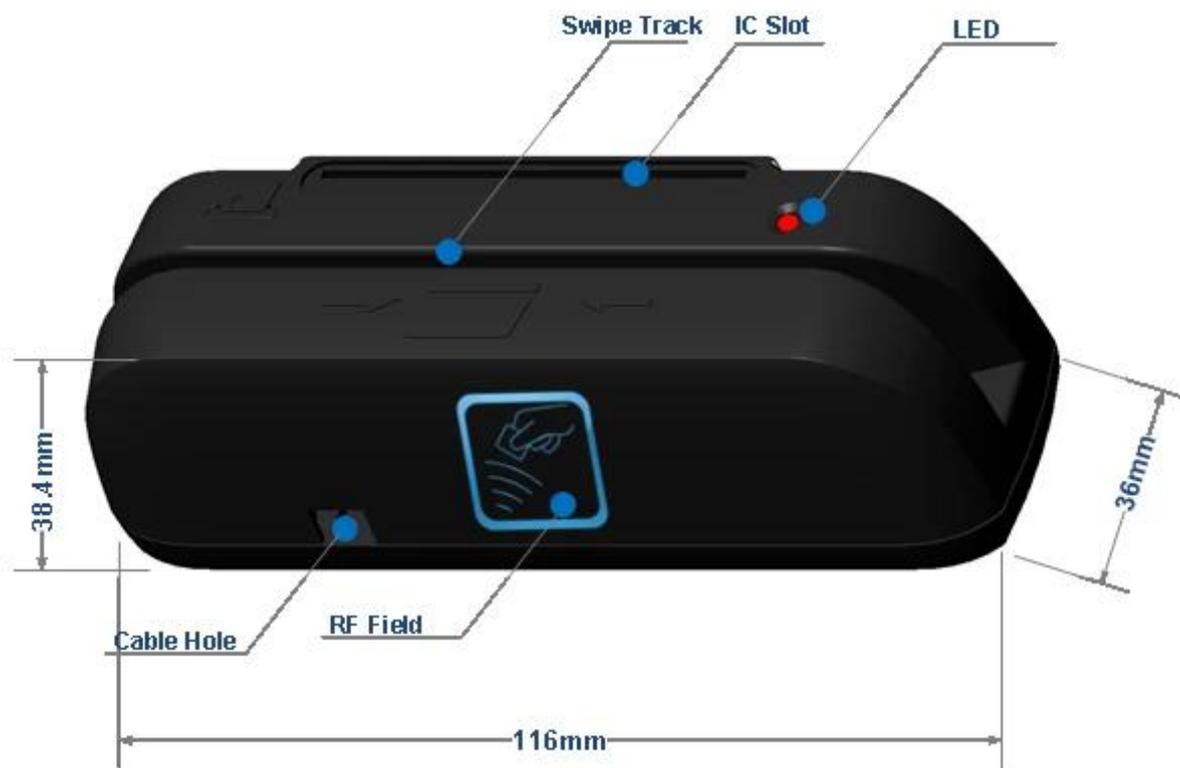



CR003IC





CR003IC





CR003IC



12 + 1 24

30 DOA DOA

4.

Paypal Moneybookers Visa MasterCard Maestro Solo Carte Bleue Postepay CartaSi 4B Euro6000

5.

6.

Eruopean ...

133 / 1300 Unilever O2 500 50

OCOM

POS ID 500

1 O2 Star ...

1500 133 /

9 OEM / ODM

POS 1

FCC CE Soncap POA BIS

12 + 1

"