

## 2 pollici Pos AutocutterRicevuta stampante (Modello: OCPP-58C)

### Specifica:

|                             |                                                                                             |
|-----------------------------|---------------------------------------------------------------------------------------------|
| Metodo di stampa            | Termica diretta                                                                             |
| Densità di stampa           | 384dots / linea                                                                             |
| Dimensione dei caratteri    | ANK, Font A: 12x24dots<br>B Font: 9x17dots<br>Semplificato / cinese tradizionale: 24x24dots |
| Codice a barre              | UPC-A / UPC-E / JAN13 (EAN13) / JAN8 (EAN8) / CODABAR / ITF / CODE39 /<br>CODE93 / CODE128  |
| Interfaccia                 | Parallela / Seriale / USB / LAN                                                             |
| Alimentazione elettrica     | DC 12V == 2.6A                                                                              |
| Registratore di cassa       | DC 12V == 1A                                                                                |
| Stampa vita testa           | 50 chilometri                                                                               |
| Condizioni d'operazione     | Temperatura (0 ~ 45 ° C), umidità (10 ~ 80%)                                                |
| Condizioni di archiviazione | Temperatura (-10 ~ 60 ° C), umidità (10 ~ 90%)                                              |
| Velocità di stampa          | 120 millimetri / s                                                                          |
| Larghezza carta             | 57.5±0,5 millimetri                                                                         |
| Diametro esterno di carta   | 65 millimetri                                                                               |
| Spessore carta              | 0,06 ~ 0,08 millimetri                                                                      |
| Il peso                     | Peso netto: 1.5KG, Peso lordo: 2,5 kg                                                       |
| Dimensione                  | 199 * 132 * 111,5 millimetri                                                                |
| Autista                     | Win9X / Win ME / Win2000 / Win2003 / WinNT / Win XP / Win Vista / Win7 / Win8               |
| Fresa                       | Taglierina automatica                                                                       |
| Comando                     | Compatibile con Epson ESC / POS                                                             |
| Interlinea                  | 3,75 millimetri (può cambiare attraverso il comando)                                        |

### Dettagli del prodotto:



**58mm Thermal Printer  
with Auto-cutter and Big Gear**

**OCPP-58C**



**Product Picture**





## Features

**Simple but not easy**

Fashionable appearance design





Big gear design, superwear resistant



High printing speed up to **120mm/s**  
for text or image



Support multiple languages

Long life, printing head life: 50KM



## All-round show





## Application Area

Food delivery, restaurant, Traffic Citation,  
Logistics, Transportation, Warehouse management,  
Delivery, Illegal Parking Ticket, Drugstore,  
Price Tag, Retail/Farm



## Demomster

## Parameter

|                        |                                                                                         |
|------------------------|-----------------------------------------------------------------------------------------|
| Print method           | Direct thermal                                                                          |
| Print density          | 384dots/line                                                                            |
| Character size         | ANK, Font A: 12x24dots<br>Font B: 9x17dots<br>Simplified/traditional Chinese: 24x24dots |
| Bar code               | UPC-A/UPC-E/JAN13(EAN13)/JAN8(EAN8)/CODABAR/ITF/CODE39/CODE93/CODE128                   |
| Interface              | Parallel/Serial/USB/LAN                                                                 |
| Power supply           | DC 12V==2.6A                                                                            |
| Cash drawer            | DC 12V==1A                                                                              |
| Printing head lifetime | 50 kilometers                                                                           |
| Operating Conditions   | Temperature (0~45 Deg C), humidity (10~80%)                                             |
| Storage Conditions     | Temperature (-10~60 Deg C), humidity (10~90%)                                           |
| Print speed            | 120mm/s                                                                                 |
| Paper width            | 57.5±0.5mm                                                                              |
| Paper                  |                                                                                         |

|                   |                                                                |
|-------------------|----------------------------------------------------------------|
| external diameter | 65mm                                                           |
| Paper thickness   | 0.06~0.08mm                                                    |
| Weight            | Net weight: 1.5KG, Gross weight: 2.5kg                         |
| Dimension         | 199*132*111.5mm                                                |
| Driver            | Win9X/Win ME/Win2000/Win2003/WinNT/Win XP/Win Vista/Win7/ Win8 |
| Cutter            | Auto cutter                                                    |
| Command           | Compatible with EPSON ESC/POS                                  |
| Line Spacing      | 3.75mm(Can change through command)                             |



## Paper Roll Installation



- A Open the printer cover.
- B Install the roller in the roll paper, and put them into the printer.
- C Pull out some paper outside the printer and then close the printer cover.
- D Close the top cover. Press the printer cover to avoid error position of roll paper.



## Connection

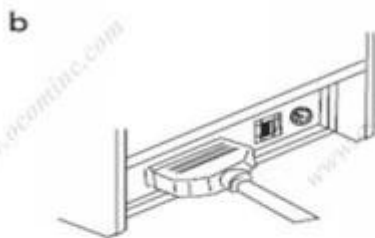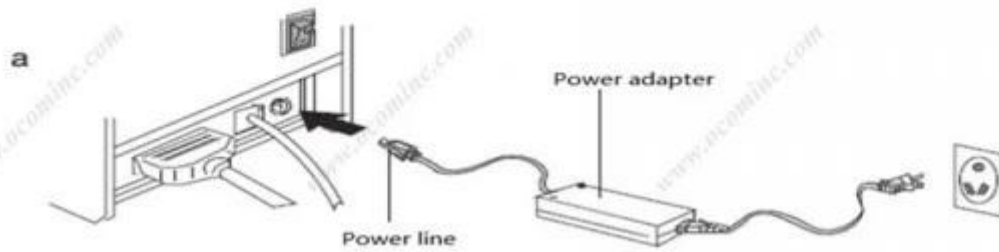

- a. Plug the DC cord connector into the printer's power connector..
- b. Plug the data cable connector into the printer's interface connector.
- c. Plug the drawer cable into the drawer kick-out connector on the back of the printer next to the interface connector.

## Shipping and payment

1. Air, Sea, Express(DHL, FedEx, UPS, EMS, TNT and so on)
2. EXPRESS: around 3-7 working days to arrive
3. INTERNATIONAL AIR MAIL: usually around 2-4 days to arrive, will also depend on which destination port
4. By sea: depend on which destination port
5. T/T
6. Western Union
7. Escrow

## Company Profile



OCOM Technologies Limited is a professional supplier specialized in POS and Auto-ID applications. Our products portfolio covers Barcode Scanner, Barcode Printer, Thermal Printer, Dot Matrix Printer, Magnetic Card Reader, Data Collector, POS Terminal, and other IOT products.

We have FCC, CE, RoHS, and other certifications. We have sell our products to West Europe, North American, Africa, Asia-Pacific and other countries.

OCOM has professional teams including marketing, R&D, quality control, production and sales service. All of the sales representatives have 3 to 10 years experience in international trading, which help us to meet the customers' needs.

OCOM have been sticking to the quality system of ISO9001:2008. We conduct strict IQC, IPQC and OQC inspection in every industrial procedure. Based on our strong capacity, the normal lead time for main products is about 3 to 7 days even for bulk order.

You can find more information of us at: [www.ocominc.com](http://www.ocominc.com), Together we quest for the best.



## Documenti importanti:

[\\*Specificazione](#)

[\\*Indirizzo IP Configurazione manuale](#)

[\\*Manuale d'istruzioni](#)

[\\* Driver per tutti i sistemi Windows](#)

[\\*Driver per Linux](#)

[\\*Parametri stampante Impostazione Strumenti](#)

[\\*CD File](#)