

# OCBS -T009 nuovo scanner di codici a barre omni desktop di alta qualità

nuovo scanner di codici a barre omni desktop di alta qualità

Numero di linee di scansione: 20;

Scan Pattern: 5 direzioni del campo di scansione;

Capacità di scansione su più linee / singole, soddisfare diversi requisiti;

La base può essere rimossa;

Diodi laser visibili 650nm (VLD);

Velocità di scansione: 1500 scansioni al secondo (omnidirezionale);

Interfacce multiple: KBW, RS232 o USB opzionale.

| PARAMETRI DI PRESTAZIONE        |  |
|---------------------------------|--|
| Fonte di luce                   | Diodo laser visibile 650nm   |
| Linea                           | 20 linee   |
| Frequenza di scansione          | 1800 scansioni al secondo (Omni-direzionale)   |
| Scansione modello               | Omni-direzionale: 5 campi di 4 linee parallele   |
| Contrasto di stampa             | Differenza di riflettanza minima del 32%   |
| Capacità di decodifica          | EAN-8, EAN-13, UPC-A, UPC-E, Codice 39, Codice 93, Codice 128, EAN 128, ISBN, ISSN, Codabar, Codice 25 non interlacciato, Codice 25 interlacciato, Matrice 2 di 5, MSI , Pos tBarcode, ecc |
| PARAMETRI ELETTRICI             |  |
| Interfaccia di supporto         | PS / 2, USB 2.0, RS232   |
| Potere di tensione              | 5 VCD $\pm$ 12% 1,6 W  |
| Laser-level                     | Class2   |
| Certificato                     | FCC, CE  |
| Indicatore LED                  | Rosso e blu  |
| PARAMETRI FISICI                |  |
| Peso (pc)                       | N.W: 474 g / pc G.W: 819 g / pz  |
| Dimensione (pc)                 | Host: 115mm * 110mm * 152mm Confezione: 245mm x165mmx132mm   |
| Peso (cartone)<br>Pacchetto     | 9,6 kg / 10 pezzi  |
| Dimensione (cartone)            | 680 millimetri * 350 millimetri * 280 millimetri   |
| PATAMETRO AMBIENTALE            |  |
| Resistente agli urti            | Può resistere a cadute libere di 1.5M  |
| temperatura di esercizio        | Da 0 a 40 gradi (32 gradi Fahrenheit fino a 104 gradi Fahrenheit)  |
| Temperatura di<br>conservazione | Da -40 a 60 gradi (da -40 gradi Fahrenheit a 140 gradi Fahrenheit)   |
| Umidità                         | Dal 5% al 95% di umidità relativa, senza condensa  |
| Ambiente sigillato              | IP54 (sigillato per resistere ai contaminanti particolati aerodispersi)  |



# Multi-line Flatbed Laser Bar code Scanner

OCBS-T009




## Product Picture



## Features

### Reliable with good price

- ▼ Gilded optical technology with 32bit chip, can read reflective, wrinled, fuzzy and colored barcode swimmingly



- ▼ Patented decoding sensor, fast and strong decode capability;



fast

strong

▼ Decoding various barcodes, accommodat more industries applications



A variety of special output format setting, adapt to customer' specific applications



### Application place



Bookstore



Supermakte



Pharmacy



Warehouse



Clothing store



Restaurant



## Parameter

| PERFORMANCE PARAMETERS  |   |
|-------------------------|---|
| Light Source            | Visible Laser Diode 650nm   |
| Line                    | 20 lines  |
| Scan Rate               | 1800 scans per second (Omni-directional)  |
| Scan Pattern            | Omni-directional: 5 fields of 4 parallel lines  |
| Print Contrast          | 32% minimum reflectance difference  |
| Decode Capability       | EAN-8, EAN-13, UPC-A, UPC-E, Code 39, Code 93, Code 128, EAN 128, ISBN,ISSN, Codabar, Code 25 non-interleaved, Code 25 interleaved , Matrix 2 of 5, MSI, PostBarcode, etc |
| ELECTRICAL PARAMETERS   |   |
| Support Interface       | PS/2, USB 2.0, RS232  |
| Voltage Power           | 5VCD±12% 1.6W   |
| Laser-level             | Class2  |
| Certificate             | FCC, CE   |
| LED Indicator           | Red and Blue  |
| PHYSICAL PARAMETERS     |   |
| Weight (pc)             | N.W: 474g/pc G.W: 819g/pc   |
| Size (pc)               | Host: 115mm*110mm*152mm Package: 245mm x165mmx132mm   |
| Weight (Carton)         | 9.6 kg/10pcs  |
| Size (Carton)           | 680mm*350mm*280mm   |
| ENVIRONMENTAL PATAMETER |   |
| Crash resistant         | Can withstand 1.5M free fall  |
| Operating Temperature   | 0 to 40 Degrees (32 Fahrenheit to 104 Fahrenheit)   |
| Storage Temperature     | -40 to 60 Degrees (-40 Fahrenheit to 140 Fahrenheit)  |
| Humidity                | 5% to 95% Relative humidity, Non-condensing   |
| Sealed Environment      | IP54 (Sealed to resist airborne particulate contaminants)   |

## Production Capacity:

✓ Indicates information has been verified onsite by a certification specialist

### Production Capacity

| Verified | Product Name                    | Production Line Capacity | Actual Units Produced(Previous Year) |
|----------|---------------------------------|--------------------------|--------------------------------------|
| ✓        | Thermal Printer                 | 40,000 Sets / Month      | 250,000 Sets                         |
| ✓        | Dot Matrix Printer              | 15,000 Sets / Month      | 10,000 Sets                          |
| ✓        | Bluetooth Printer               | 30,000 Sets / Month      | 20,000 Sets                          |
| ✓        | Barcode Scanner                 | 40,000 Sets / Month      | 20,000 Sets                          |
| ✓        | POS Machine                     | 5,000 Sets / Month       | 10,000 Sets                          |
| ✓        | Magnetic Card Reader and Writer | 45,000 Sets / Month      | 50,000 Sets                          |

Verified by TUV on 2013.7.15

## Quality Assurance:



OCOM is dedicated to providing most cost-effective products and services with highest quality that will meet customers' satisfaction.

Since the establishment, OCOM has been sticking strictly to the standard and requirements of ISO9001: 2000 in the processes of research, design, manufacturing and services. OCOM's products have passed CE, FCC, TUV, RoHs and other certifications.

We make strictly IQC, IPQC and OQC inspection per industrial standard. All the products must pass 24-48 hours aging test before shipment. Some designated models can have as long as 24 months warranty.

## Test Equipments:

✓ Indicates information has been verified onsite by a certification specialist

### Test Equipment and Facilities

| Verified | Machine Name             | Brand & Model No. | Quantity |
|----------|--------------------------|-------------------|----------|
| ✓        | Ageing Tester            | No Information    | 6        |
| ✓        | Withstand Voltage Tester | CC2670A           | 1        |
| ✓        | Oscilloscope             | TBS1102           | 1        |
| ✓        | DC Power Supply          | PS-305DM          | 6        |
| ✓        | Digital Torque Meter     | HP100             | 1        |
| ✓        | Calliper                 | GUANGLU           | 2        |
| ✓        | Multi-meter              | VC890D            | 7        |
| ✓        | Test Computer            | No Information    | 13       |

Verified by TUV on 2013.7.15

## Certification:




## Warranty and After Sales:

- ▶ All products' warranty are not less than 12 month, some models even up to 24 months warranty.
- ▶ Spare parts will be provided for mass orders for customers' local maintenance.
- ▶ Any product found to be defective within 30 days of shipment shall be deemed Dead on Arrival (DOA). DOA products will be advance replaced and shipped via express.
- ▶ Have distributors or authorized agents in the main market who can provide local repair and replacement services.
- ▶ Professional CRM management insures fast respond for customer's enquiries and orders tracking.
- ▶ Sales with many years experience in foreign trade, proficient in foreign languages and strong sense of responsibility.
- ▶ 7\*24 hours online, responds with 12 hours in working days, and within 24 hours for rest days.



## Packing and Shipment:

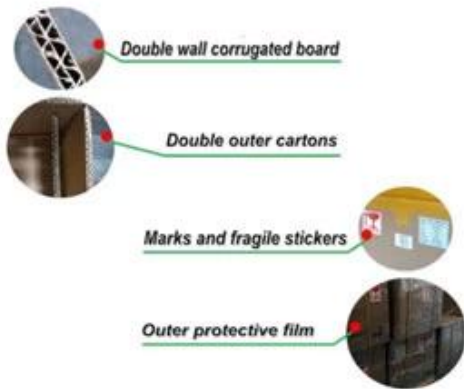

## Payment:



## Customers Reference

Over the years, OCOM keep efforts on marking "OCOM" as an internationally recognized brand, and we have established goods relationship with our customers and have friendly communication with each other.





## Company Profile

### TRADE ASSURANCE

- 100% money refund for Late shipment & Quality problem
- Guarantee on-time delivery
- Third-party pre-shipment quality inspection (Optional)
- No transaction commission charged
- The HIGHEST assurance amount guaranteed by alibaba in the Auto-ID and POS industry .



OCOM Technologies Limited is a professional supplier specialized in POS and Auto-ID applications. Our products portfolio covers , Thermal Printer, Barcode printer, Dot Matrix Printer , Barcode Scanner, Magnetic Card Reader, Data Collector, POS Terminal, and other IOT products.



We have FCC, CE, RoHS, and other certifications. We have sell our products to West Europe, North American, Africa, Asia-Pacific and other countries.

OCOM has professional teams including marketing, R&D, quality control, production and sales service. All of the sales representatives have 3 to 10 years experience in international trading, which help us to meet the customers' needs.

OCOM have been sticking to the quality system of ISO9001:2008. We conduct strict IQC, IPQC and OQC inspection in every industrial procedure. Based on our strong capacity, the normal lead time for main products is about 3 to 7 days even for bulk order.

You can find more information of us at: [www.ocominc.com](http://www.ocominc.com),

Together we quest for the best.



## Why you choose us?



## Contact us

**Any queries, please contact us immediately, big surprise is waiting for you.**

**Sales Center:**

Address: Unit701, Block 14, Zhongxing Industrial Park, Chuangye Road, Nanshan District, Shenzhen 518054, China

Website: [www.ocominc.com](http://www.ocominc.com) [www.possolution.com.cn](http://www.possolution.com.cn);

E-mail: [ocom@ocominc.com](mailto:ocom@ocominc.com), [info@possolution.com.cn](mailto:info@possolution.com.cn) ;

Tel: +86.755.86053207 ext 800;

Fax: +86.755.86053207 ext 868;

QQ: 2485890637, 190852203;

Wechat: szocominc, hj34924238;

Whatsapp: 008613352932860;



## Documenti rilevanti:

[Manuale utente](#)