

15 inch touch screen supermarket cash register POS machine

(M/N:POS-8617)

**keywords**

cash register supermarket cash register POS machine

**Features:**

1 Intel Celeron J1900 Quad core 2.0 GHZ

1 Hard Driver SSD 32GB (default),SSD 64GB and HDD320G for optional

1 5 wire resistive touch screen(default),Capacitive screen for optional

1 Card reader and VFD customer display for optional

**Applications:**


1 Catering: hotel, restaurant, fast-food restaurant, coffee shop, bakery and cake shop

1 Retailer: Business Street, boutique, department store, cosmetics shop and high-class barbershop

1 Recreation: sauna, spa, night club, theme park, casino and point of sales for lottery ticket

1 Commercial: information management terminals for parking lot, inn, aviation, subway, station and wharf

Picture show:

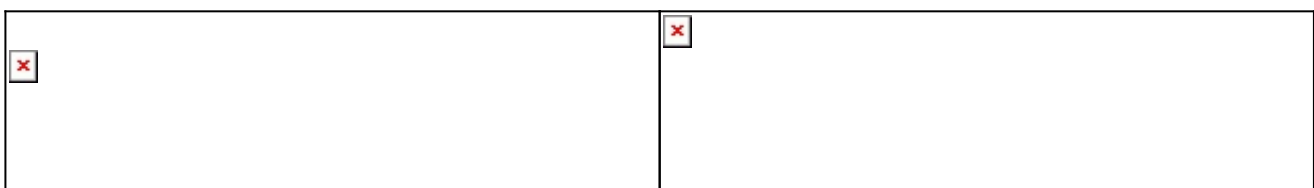

**Parameter**

|                      |                                       |
|----------------------|---------------------------------------|
| Model                | POS-8617                              |
| Color                | White                                 |
| Optional Peripherals | VFD220E                               |
| Main Board           | Intel Celeron Processor               |
| CPU                  | Intel Celeron J1900 Quad core 2.0 GHZ |
| Chipset              | Intel NM70                            |
| Memory Support       | DDRIII 1066/1333*1 2GB (default)      |

|                       |  |
|-----------------------|--|
| Hard Driver           | SSD 32GB (default)                               |
| LCD panel Size        | 15 inch TFT LCD                                  |
| Brightness            | 350cd/m <sup>2</sup>                             |
| Resolution            | 1024*768(max)                                    |
| Touch Screen          | 5 wire resistive touch screen                    |
| View Angle            | Horizon: 150; Vertical :140                      |
| I/O port              | 1* power button 12V DC in jack*1                 |
|                       | HDMI*1   |
|                       | VGA(15Pin D-sub)*1                               |
|                       | LAN:RJ-45*1                                      |
|                       | USB(2.0)*6                                       |
|                       | RS232*1  |
|                       | MIC IN*1 Audio out*1                             |
| Operating temperature | 0°C to 40°C                                      |
| Storage temperature   | -20°Cto 60°C                                     |
| Compliance            | FCC Class A/CE Mark/LVD/CCC                      |
| Operating System      | Windows XP above, Embedded, WEPOS, Linux         |
| Power adapter         | 110-240V/50-60HZ AC power, Input DC12/5A out put |