

Magnetic Stripe and IC Card Combo Reader

(M/N:CR003IC)

1.Introduction

CR003IC is a programmable magnetic card, IC card of multi-function, reading . The user can according to actual needs, by programming or configuration data formats and intelligent interface.

It is widely used in industry, commerce, telecommunications, taxation, banking, insurance, medical and all kinds of charges, storage, query management system.


2.Features

- Convenient: boot self-checking, no additional power supply, plug and play
- Card type: can read and write all kinds of memory card and support T = 0, T = 1 protocol CPU card
- Communication interface: via USB and computer communication, support the Android platform

3.Technical Specification

| | |
|-------------------------|--|
| Communications | USB or RS232 |
| Temperature | -20° ~ 60 °C□storage□ 0° ~ 50 °C□operation□ |
| Humidity | 15%~85% |
| Dimensions | 116mm(L) ×36mm(W) × 38.4mm(H) |
| IC card | |
| Operating Life | > 200,000 times |
| Card thickness | About 0.75mm |
| Insert IC card Current | 20mA |
| Operate IC card | 50mA |
| Working current | 25mA |
| Card type | AT24C01A/24C02/24C04/24C08/24C16/AT24C64□ SLE4432/4442□SLE4418/4428□ ISSI 24C01A/16,ISO7816-(1-4) (T=1, T=0) |
| Magnetic Stripe | |
| Card type | ISO 7811,AMMVA,CADMV and other format |
| Swipe speed | 3 ~ 60 inches / second |
| Operating Life | >600,000 |
| Track position | All 3- track |
| Card thickness | 0.76~1.2mm |
| Working current | 7mA |
| RFID(Optional Function) | |

| | |
|------------------|--------------------------|
| Card type | 13.56MHz ISO/IEC14443A/B |
| Operating Life | >600,000 |
| Sensing distance | 1-4cm |

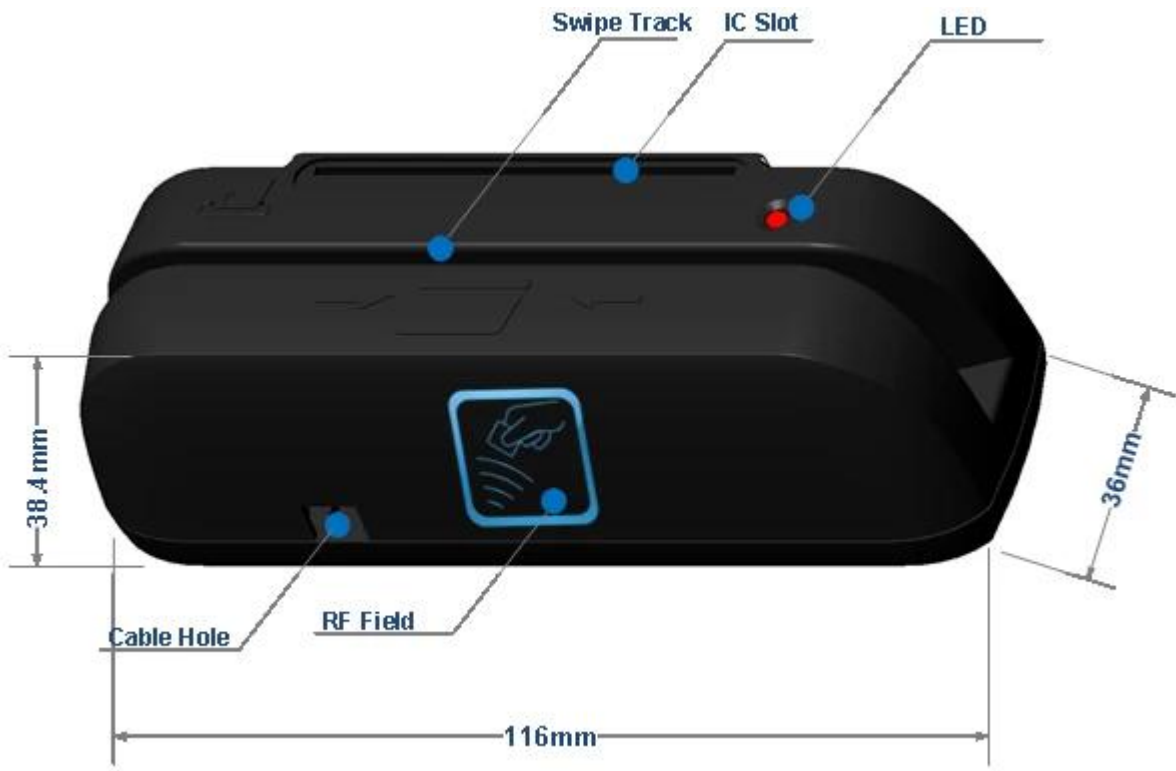



CR003IC



- 持卡人签名: *Signature* *Signature*
1. 使用本卡必须遵守阳光银行有关规定。
 2. 本卡不得转借他人, 因持卡人非密码导致的损失, 本行不承担任何责任。
 3. 若卡遗失, 请立即向本行挂失。
 4. 若拾得本卡, 请立即交还所属本行。

持卡人签名: *Signature* *Signature*

4401 770

全国24小时服务热线: 95595 中国光大银行: www.cebbank.com





CR003IC





CR003IC

