

(OCPP-806)

تخصيص:

| | |
|-----------------------------|---|
| طريقة الطباعة | مباشرة الحرارة |
| الأحرف الطباعة | 576 ANK نقطة / خط، 512 نقطة / خط، الأحرف |
| الخط | A: 12 * 24dots, 1.5 (W) * 3.0 (H) ملم. B: 9 * 17dots, 1.1 (W) * 2.1 (H) ملم |
| المبسطة / الصينية التقليدية | 24 * 24dots, 3.0 (W) * 3.0 (H) ملم |
| نوع الباركود | UPC-A / UPC-E / JAN13 (EAN13) / JAN8 (EAN8) CODABAR / ITF / CODE39 / CODE93 / CODE128 |
| سرعة الطباعة | 300MM / ثانية |
| جهة تعامل | إترنت + USB + المسلسل |
| قيادة الطباعة | ESC / POS متوافق مع |
| السائقين | وين فيستا / ويندوز 7 / نافذة / WIN2003 // Win2000 نظامي التشغيل / Win9x الأنظمة الأساسية XP / ESPON متوافقة مع ، |
| طباعة العرض | 79.5 ± 0.5mm 72 (و)mm (الطباعة عرض |
| ورقة قطر | 83mm |
| ورقة سماكة | 0.06-0.08mm |
| قاطعة | قطع السيارات |
| الموثوقية الطباعة | 100KM |
| قوة | DC24V / 2.5A |
| درجة الحرارة | درجة 0-45 |
| على النقيض من الرطوبة | 10-80% |
| البعد الخارجي | 195D * 155W * 148H مم |
| الوزن الإجمالي | 2.70kg |
| صفحة | (كارتون الحجم 8 قطع): 60 * 44 * 36 (سم. صندوق الداخلية: 29 * 21 * 17 |

تفاصيل المنتج:



**80mm Thermal Receipt
Printer with auto-cutter
OCPP-806**



Product Picture





Features

Simple but not easy

Water-proof and grease-proof.



Support NV image downloading and printing
Support different density bitmap graphics printing



Support raster bitmap printing



USB+Serial +Ethernet



High Printing Speed
(Max 260mm/second)
Auto Cutter Optional



Characters can be amplified, printed in bold optionally, and line spacing printing can be adjusted



All-round show





Application Area

Food delivery, restaurant, Traffic Citation, Logistics,
Transportation, Warehouse management, Delivery, Illegal
Parking Ticket, Drugstore, Price Tag, Retail/Farm



Paper Roll Installation



- A Open the printer cover.
- B Install the roller in the roll paper, and put them into the printer.
- C Pull out some paper outside the printer and then close the printer cover.
- D Close the top cover. Press the printer cover to avoid error position of roll paper.
- E Tear-off the paper correctly.

Setting the Printing Mode(DIP switches):


The DIP switches are used to set the printer to perform various functions, such as cutter mode, character set, speed, beeper, print density and etc.

Parameter


| | |
|--------------------------------|--|
| Printing Method | Direct Thermal |
| Printing Character | 576 dots/line, 512 dots/line, ANK characters |
| Font | A: 12*24dots,1.5(W)*3.0(H)mm; B: 9*17dots,1.1(W)*2.1(H)mm |
| Simplified/Traditional Chinese | 24*24dots, 3.0(W)*3.0(H)mm |
| Barcode Type | UPC-A/UPC-E/JAN13(EAN13)/JAN8(EAN8)CODABAR/ITF/CODE39/CODE93/CODE128 |
| Printing Speed | 300mm/sec |
| Interface | Parallel or Serial + USB + Ethernet |
| Printing Command | Compatible with ESC/POS |
| Drivers | Win9X/Win2000/Win2003/Win Vista/ Win 7/Window XP /, compatible with ESPON, SAMSUNG |
| Printing Width | 79.5±0.5mm(print width 72mm) |
| Paper Diameter | 83mm |
| Paper Thickness | 0.06-0.08mm |
| Cutter | Auto cutter |
| Printing Reliability | 100km |
| Power | DC24V/2.5A |
| Temperature | 0-45 degree |
| Contrast Humidity | 10-80% |
| External Dimension | 195D*155W*148H mm |
| Gross Weight | 2.70kg |
| Package | Inner Box: 29*21*17cm; Carton Size (8 pcs): 60*44*36(cm) |



1. Remove the DIP switches cover on the bottom of the printer.




2. DIP switches setting




Connection


a

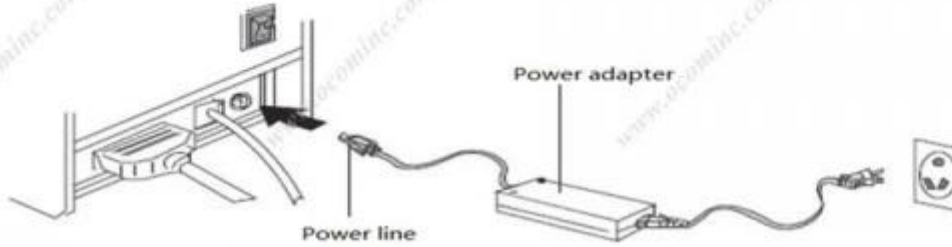

b

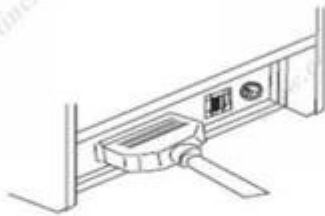

c

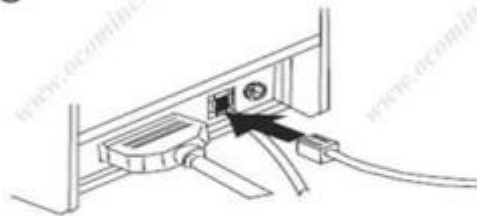

- a. Plug the DC cord connector into the printer's power connector..
- b. Plug the data cable connector into the printer's interface connector.
- c. Plug the drawer cable into the drawer kick-out connector on the back of the printer next to the interface connector.

Shipping and payment

1. Air, Sea, Express(DHL, FedEx, UPS, EMS, TNT and so on)
2. EXPRESS: around 3-7 working days to arrive
3. INTERNATIONAL AIR MAIL: usually around 2-4 days to arrive, will also depend on which destination port
4. By sea: depend on which destination port
5. T/T
6. Western Union
7. Escrow
8. L/C

Company Profile



OCOM Technologies Limited is a professional supplier specialized in POS and Auto-ID applications. Our products portfolio covers Barcode Scanner, Barcode Printer, Thermal Printer, Dot Matrix Printer, Magnetic Card Reader, Data Collector, POS Terminal, and other IOT products.

We have FCC, CE, RoHS, and other certifications. We have sell our products to West Europe, North American, Africa, Asia-Pacific and other countries.

OCOM has professional teams including marketing, R&D, quality control, production and sales service. All of the sales representatives have 3 to 10 years experience in international trading, which help us to meet the customers' needs.

OCOM have been sticking to the quality system of ISO9001:2008. We conduct strict IQC, IPQC and OQC inspection in every industrial procedure. Based on our strong capacity, the normal lead time for main products is about 3 to 7 days even for bulk order.

For more information, please contact us at info@ocominc.com

You can find more information of us at: www.ocominc.com,
Together we quest for the best.



الوثائق ذات الصلة:

[*تخصيص](#)

[*دليل البرامج](#)

[*كتب التعليمات](#)

[*dows سائق لوين](#)

[*برنامج تشغيل لينكس](#)

[*معلومات الطابعة أدوات ضبط](#)

[*Printdemo USB \(تطبيق تجريبي البرمجيات\)](#)

[*لأجهزة الأندرويد SDK](#)

[*القرص المضغوط ملفات](#)