(OCPP-88A :نموذج)

امیزات

1. الطباعة عالية السرعة بسرعات تصل إلى 300 ملم / ثانية؛
2. الطباعة عالية السرعة بسرعات تصل إلى 300 ملم / ثانية؛
3. القاطع التلقائي الاختياري.
4. الخط وخيارات الاتصالات اللاسلكية
4. الخط وخيارات الاتصالات اللاسلكية
4. الخط وخيارات الاتصالات اللاسلكية
4. الحلط وخيارات الاتصالات اللاسلكية
5. USB، USB + LAN، USB + LAN، USB + بلوتوث مواجهات
4. وواي فاي .4N. + USB
5. مسموعة متنوعة من واجهات
6. مسموعة دعم تطبيق إنذار.
7. دعم أنواع مختلفة من الأبعاد واحد واثنين من الأبعاد طباعة الرمز الشريطي.
8. يدعم مجموعة متنوعة من اللغات العالمية.
9. SDK . يعتمد عليه رأس الطباعة ومائة كيلومتر.
الأمر / نقاط البيع SON ESC . متوافق

:المعلمات

| | <u></u> |
|----------------|--|
| | |
| 0000000 000000 | 576dots / 512 [[[[]]][[]][[]] [[]] [[]] [[]] [[]] [|
| | 24 18030 18030 18030 18030 18030 18030 18030 18030 18030 18030 18030 18030 18030 |
| | 00000 0(00000 0000) 0000000 0000 ANK. |
| | 24 * 12 : dots 1.5 (W) * 3.0 (H) . |
| | 17 * 9 : COUNTY OF THE STATE OF |
| | 24 * 24 : [] [] [] [] [] [] [] [] [] [] [] [] [] |
| | JUPC-A / UPC-E / JAN13 (EAN13) / JAN8 (EAN8) / CODABAR / ITF / CODE39 / |
| | CODE93 / CODE128 |
| | |
| | 250 3000 00000 00000 000 00000 / 000MM / 000000 00000 000000 00000 |
| | USB USB + |
| | |
| | 00 000000 EPSON ESC / POS 000000 |
| | |
| | 8 7 000 / win8.1 / Win10 / 0 000000ESPON0 0000 SDK 0000000 00 0000000. |
| | 79.5 ± 0.5 72 000 00000) 00) |
| | 83 🖂 🗎 |
| | 0.06-0.08mm |
| | 000000) 0000000 000000) |
| | |
| | DC24V / 2.5A |
| | 0-45 |
| | 10-80□ |
| | 190 * 145 * 145 ([[]) |
| | 1.60 |

| | | _ _ |
|------------|---------------|---|
| | P / N | |
| | OCPP-88A-U | 0000 USB 0000000 000000 0000 |
| | OCPP-88A-UR | USB + 0000000 00000 0000 0000000 00000 |
| | OCPP-88A-UL | USB + LAN 00000 00 0000000 00000 000 000000 |
| | OCPP-88A-URL | USB + 00000 + LAN 0000000 000000 0000000 |
| | OCPP-88A-W | 0000 + 0000000 USB0 0000000 000000 |
| 000000 000 | OCPP-88A-BU | 000000 + USB0 0000000 000000 0000 |
| | OCPP-88A-U0 | 0000 USB0 0000000 000000 00 |
| | OCPP-88A-UR0 | USB + 0000000 000000 00 0000000 |
| | OCPP-88A-UL0 | USB + 0000 LAN0 0000000 000000 00 |
| | OCPP-88A-URL0 | USB + 0000 + 00000 LANO 0000000 000000 000 |
| | OCPP-88A-W0 | 0000 + 0000000 USB0 0000000 000000 00 |
| | OCPP-88A-BU0 | 000000 + USB0 0000000 000000 00 |





Reliable with good price

Unique appearance with reliable mould





High Printing Speed up to 300mm/second; Auto Cutter Optional; Cord and cordless communication for options

Reliable printer head with 100km life; Compatible with EPSON ESC/POS commands.







Sound and light alarm supported suitable for kitchen application;

Support multi international languages; SDK for Android available;





Multiple interfaces available: USB, USB+Serial, USB+LAN, USB+ Serial+ LAN; and Wifi+USB, Bluetooth+USB+LAN

Support multiple 1D barcode and QR code printing;





Application Area

- Order printing for restaurant kitchen;
- Electronic cash register POS system bill printing;
- Electronic funds transfer (EFT) POS system bill printing;
 - Sports, postal services, civil aviation ticket printing;

 - Inquires and service system for ticket printing
 Measuring instrument information on printing;
 - > Tax, single-bill printing







| Printing Method | Thermal line printing | | | | |
|----------------------|---|--|--|--|--|
| 2-20-20 2-20-20 24 | 576dots/line (default), | 512dots/line; | | | |
| Printing Character | Characters Simplified Chinese 24x24 point, support 18030 font I ibrary, support Taiwan | | | | |
| | and HK traditional (complex font), ANK characters; | | | | |
| | A: 12*24dots,1.5(W)*3.0(H)mm; | | | | |
| Font | B: 9*17dots,1.1(W)*2.1(H)mm | | | | |
| | Simplified/Traditional : 24*24dots, 3.0(W)*3.0(H)mm | | | | |
| Barcode Type | JUPGA/UPC - E/JAN13(EAN13)/JAN8(EAN8)/CODABAR/ITF/CODE39/CODE93/CO DE128,QR code | | | | |
| Printing Speed | 250mm/sec for a single | nterface ,300mm/secfor Double interface and three interfaces | | | |
| Interface | USB, USB+Serial, USB+ | LAN, USB+ Serial+LAN, Wifi+USB, Bluetooth+USB+LAN | | | |
| Printing Command | Compatible with EPS | ON ESC/POScommands | | | |
| Drivers | Win9X/ Window XP /Win2000/ Win2003/Win Vista/ Win 7/Win 8/win8.1/Linux, compatible with ESPON, SDK for Android available. | | | | |
| Printing Width | 79.5 ± .5mm(print width 72mm) | | | | |
| Paper Diameter | 83mm | | | | |
| Paper Thickness | 0.060.08mm | | | | |
| Cutter | Auto cutter(optional) | | | | |
| Printing Reliability | 100km | | | | |
| Power | DC24V/2.5A | | | | |
| Temperature | 0-45 degree C | | | | |
| Contrast Humidity | 10-80% | | | | |
| External Dimension | 190*145*145(mm) | | | | |
| Weight | 1.60kg | | | | |
| | P/N | Description | | | |
| | OCPP -88A-U | USB port, with auto cutte | | | |
| | OCPP -88A-UR | USB+Serialport, with auto cutter | | | |
| Ordering information | OCPP -88A-UL | USB+Lanport, with auto cutter | | | |
| | OCPP -88A-URL | USB+Serial+Lan port, with auto cutter | | | |
| | OCPP -88A-W | Wifi+USB port, with auto cutter | | | |
| | OCPP -88A BUL | Bluetooth+USB+LAN, with auto-cutter | | | |
| | OCPP -88A-U0 | 2 -88A-U0 USB port , without auto cutter | | | |
| | OCPP -88A-UR0 USB+Serialport, without auto cutter | | | | |
| | OCPP -88A - UL0 USB+Lanport , without auto cutter | | | | |
| | OCPP -88A-URL0 USB+Serial+Lanport , without auto cutter | | | | |
| | OCPP -88A-W0 Wifi+USB port , without auto cutter | | | | |
| | OCPP -88A-BUL0 | Bluetooth+USB+LAN, without auto-cutter | | | |

Supported Languages:


| Afrikaans | Arabic (Tunisia) | English (British) | French (Switzerland) | Latvian | Spanish (Costa Rica) |
|-----------------------|-------------------------|------------------------|--|-----------------------|----------------------|
| Albanian | Arabic (Yemen) | English (Canada) | German (Austria) | Lithuanian | Spanish (Dominican) |
| Arabic (Algeria) | Basque | English (Caribbean) | German (Liechtenstein) | Macedonian | Spanish (Ecuador) |
| Arabic (bahrain) | Belarus | English (Irish) | English (Irish) Cerman Polish | | Spanish (Guatemala) |
| Arabic (Egypt) | Bulgarian | English (Jamaica) | sh (Jamaica) German (Standard) Portuguese (Brazil) | | Spanish (Mexico) |
| Arabic (Iran) | Catalan | English (New Zealand) | German (Switzerland) | Portuguese (Portugal) | Spanish (panama) |
| Arabic (Jordan) | Chinese (Singapore) | English (South Africa) | Greek | Romanian | Spanish (Paraguay) |
| Arabic (Kuwait) | Chinese (Hongkong) | English (US) | Hebrew | Russian | Spanish (Peru) |
| Arabic (Lebanon) | Chinese (PRC) | Estonian | Hun | Serbian | Spanish (Uruguay) |
| Arabic (Libya) | Chinese (Taiwan) | Faroese | Icelandic | Slovak | Spanish (Venezuela) |
| Arabic (Morocco) | Croatian | Farsi | Indonesian | Slovenian | Thai Language |
| Arabic (Oman) | Czech | Finnish | Italian (Switzerland) | Swedish | Turkish |
| Arabic (Qatar) | Danish and Norwegian | French (Belgium) | Italian | Spanish (Argentina) | Ukrainian |
| Arabic (Saudi Arabia) | Dutch (Belgium) | French (Canada) | Japanese | Spanish (Bolivia) | Urdu |
| Arabic (Syria) | Dutch (standard) | French (Luxembourg) | Korean | Spanish (Chile) | Vietnamese |
| Arabic (UAE) | English (Australia) | French (Standard) | Vietnamese | Spanish (Colombia) | |




How to use?

Connecting the printer:

- The power adapter cable connect to the printer power interface
- The interface cable connect on the printer port behind
- The cash drawer connecting cable connect to the printer's behind the cash drawer interface

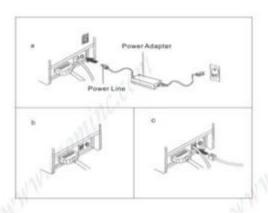



Installation of paper roll:

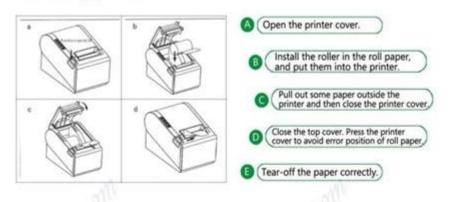

Setting the Printing Mode(DIP switches):

The DIP switches are used to set the printer to perform various functions, such as cutter mode, character set, speed, beeper, print density and etc.



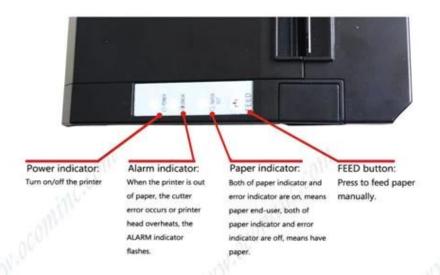

Clean of printer:

When the printer has the following conditions should clean the print head:

- The printer does not clear
- The page frame lengthways of printer has some not clean
- Paper feed with a large noise

Printer cleaning steps as follows:

- Shut off the power of printer, Open the Top Cover; If there is paper, please wipe off the paper;
- If it just finished a printing, please wait for a while until the print head cooling;
- With a soft cotton cloth dipped in ethanol (to be wrung) erase the thermal printer head thermal surface dust, stains;
- As the anhydrous ethanol evaporate completely, closed the top cover, and restart to print.

Production Process

| No. | Production Process | No. | Production Process | No. | Production Process |
|-----|--------------------|-----|--------------------|-----|--------------------|
| 4) | 400 | 2 | | 3 | |
| | Inspection 1 | | Soldering | | Assembling 1 |
| 4 | | 5 | | 6 | |
| | Assembling 2 | | Function Test | | Ageing Test |
| 7 | | 8 | | 9 | |
| | Inspection 2 | 1 | Packing 1 | 1 | Packing 2 |



Verified by TUV on 2013.7.15

Quality Assurance:



OCOM is dedicated to providing most cost-effective products and services with highest quality that will meet customers'satisfaction.

Since the establishment, OCOM has been sticking strictly to the standard and requirements of ISO9001: 2000 in the processes of research, design, manufacturing and services. OCOM's products have passed CE, FCC, TUV, RoHs and other certifications.

We make strictly IQC, IPQC and OQC inspection per industrial standard. All the products must pass 24-48 hours aging test before shipment. Some designated models can have as long as 24 months warranty.

Test Equipments:

✓ Indicates information has been verified onsite by a certification specialist.

Test Equipment and Facilities

| Verified | Machine Name | Brand & Model No. | Quantity |
|----------|--------------------------|-------------------|----------|
| 1 | Ageing Tester | No Information | 6 |
| 1 | Withstand Voltage Tester | CC2670A | 1 |
| 1 | Oscilloscope | TBS1102 | 1 |
| 1 | DC Power Supply | PS-305DM | 6 |
| 1 | Digital Torque Meter | HP100 | 1 |
| V | Calliper | GUANGLU | 2 |
| 1 | Multi-meter | VC890D | 7 |
| 1 | Test Computer | No Information | 13 |

Verified by TUV on 2013.7.15

Certification:










Warranty and After Sales:



- Spare parts will be provided for mass orders for customers' local maintenance.
- Any product found to be defective within 30 days of shipment shall be deemed Dead on Arrival (DOA). DOA products will be advance replaced and shipped via express.
- Have distributors or authorized agents in the main market who can provide local repair and replacement services.
- Professional CRM management insures fast respond for customer's enquiries and orders tracking.
- Sales with many years experience in foreign trade, proficient in foreign languages and strong sense of responsibility.
- 7*24 hours online, responds with 12 hours in working days, and within 24 hours for rest days.

Packing and Shipment:





Payment:









secure payment







Customers Reference

Over the years, OCOM keep efforts on marking "OCOM" as an internationally recognized brand, and we have established goods relationship with our customers and have friendly communication with each other.



Company Profile





OCOM Technologies Limited is a professional supplier specialized in POS and Auto-ID applications. Our products portfolio covers, Thermal Printer, Barcode printer, Dot Matrix Printer, Barcode Scanner, Magnetic Card Reader, Data Collector, POS Terminal, and other IOT products.

We have FCC, CE, RoHS, and other certifications. We have sell our products to West Europe, North American, Africa, Asia-Pacific and other countries.

OCOM has professional teams including marketing, R&D, quality control, production and sales service. All of the sales representatives have 3 to 10 years experience in international trading, which help us to meet the customers' needs. OCOM have been sticking to the quality system of ISO9001:2008. We conduct strict IQC, IPQC and OQC inspection in every industrial procedure. Based on our strong capacity, the normal lead time for main products is about 3 to 7 days even for bulk order.

You can find more information of us at: www.ocominc.com, Together we quest for the best.













Why you choose us?



Contact us

Any queries, please contact us immediately, big supprise is waiting for you.

Sales Center:

Address: Unit701, Block 14, Zhongxing Industrial Park, Chuangye Road, Nanshan

District, Shenzhen 518054, China

Website: www.ocominc.com www.possolution.com.cn; E-mail: ocom@ocominc.com, info@possolution.com.cn;

Tel: +86.755.86053207 ext 800; Fax: +86.755.86053207 ext 868; QQ: 2485890637, 190852203; Wechat: szocominc, hj34924238; Whatsapp: 008613352932860;





:مستندات ذات صلة

- <u>مواصفة*</u>
- دليل الإجراءات*
- <u>تعلیمات*</u>
- Win2000 WinVista Win8-32bit برنامج تشغيل ويندوز إكس بي نظامي التشغيل*
- Win8-64bit و& أمبير؛ Win7 سائق<u>*</u>
- <u>سائق لينكس*</u>
- طابعة أداة إعداد المعلمة*
- <u>*Printdemo USB(تطبيق تحريبي البرمحيات</u>

<u>لأجهزة الأندرويد SDK*</u>

<u>القرص المضغوط ملفات*</u>