

(資料出典: OCBS-LA06)

5 .Durable .

規格項目:	670-650) 波長 650nm)
照射面積:	100 mm ² (約 10cm x 10cm)
照射距離:	2.5 ~ 600MM (100mm UPC / EAN)
照射時間:	連続照射可能
照射速度:	0.10mm (4mil) 毎 PCS 0.9
照射位置:	20mm 650 @) 照射位置 照射位置 照射位置(NM)
照射角度:	UPC / EAN UPC / EAN 照射位置 照射 UCC / EAN128 照射位置 39 照射位置 39 ASCII 39 照射位置 照射位置 trioptic 128 照射位置 128 照射位置 ASCII 照射位置 codabar 93 照射位置 5 照射位置 2 照射位置 5 照射位置 2 照射位置 MSI 11 照射位置 ATA 照射位置 RSS 5 照射位置 2 照射位置 ...
接続端子:	PS2 RS232 USB
電源電圧:	DC + 5V +/- 5%
消費電力:	100 mW (最大)
照射範囲:	照射範囲 & lt; 40 cm
照射速度:	照射速度 照射速度 照射速度 (RS232) 照射速度 照射速度
照射位置:	照射位置 60 照射位置 照射位置 45 照射位置
照射角度:	L165.42mm X W69.72mm X H89.67mm
照射位置:	140G (照射位置 照射位置)
照射速度:	照射速度
照射位置:	照射位置 照射位置
照射温度:	0 °C ~ 50 °C
照射湿度:	-40 °C ~ 70 °C
照射速度:	5 ~ 照射速度 照射速度 95 照射速度 照射速度
照射位置:	15 照射位置 照射位置 -/+ 照射位置 KV 8 -/+ 照射位置 KV 照射位置 照射位置 照射位置
照射角度:	1.5 照射位置 照射位置 M 照射位置 照射位置
照射位置:	
EMI / RFI:	FCC () 照射位置 CE
照射速度:	照射位置 CDRH 照射位置 2 照射位置



Handheld Laser Barcode Scanner

OCBS-LA06



Product Picture





Features

Simple but not easy

Auto-Induction built in, green design



High scan rate and long reading



High scan rate and long reading distance



Excellent decode capability



KBW, RS232 and USB supported

Durable construction combined with
future-proofing



All-round show





Parameter

Performance Characteristics	
Light Source:	Visible laser (650-670nm)
Scan Rate:	100 scans per second
Reading Distance	2.5 ~600mm (100% UPC/EAN)
Scanner Type:	Bi-directional
Resolution:	0.10mm (4mil) at PCS 0.9
Print Contrast Minimum:	20%, minimum reflective difference (@650nm)
Decode Capability:	UPC/EAN, UPC/EAN with supplementals, UCC/EAN128, code 39, code 39 full ASCII, code 39 trioptic, code 128, code 128 full ASCII, codabar, interleaved 2 of 5, discrete 2 of 5, code 93, MSI, code 11, ATA, RSS variants, Chinese 2 of 5...
Physical Characteristics	

Interfaces Supported:	PS2, RS232, USB
Voltage:	DC+5V+/-5%
Current:	100 mA
Idle Current:	<40 mA
Power Source:	Host power or external (RS232) power supply
Scanning Angle	Inclination 45° Elevation 60°
Dimensions:	L165.42mm X W69.72mm X H89.67mm
Weight:	140g (without stand)
Stand	With
Color:	Ivory and black
User Environment	
Operating Temperature:	0°C~50°C
Storage Temperature:	-40°C~70°C
Humidity:	5~95% relative humidity, non-condensing
Electrostatic Discharge:	Confirm to +/-15KV air discharge and +/-8KV of contact discharge
Drop Specifications:	Withstands multiple 1.5m drops to concrete
Safe:	
EMI/RFI:	FCC Class A and CE
Laser Safety:	CDRH class 2 laser product


Shipping and payment

1. Air, Sea, Express(DHL, FedEx, UPS, EMS, TNT and so on)
2. EXPRESS: around 3-7 working days to arrive
3. INTERNATIONAL AIR MAIL: usually around 2-4 days to arrive, will also depend on which destination port
4. By sea: depend on which destination port
5. T/T
6. Western Union
7. Escrow
8. L/C

Company Profile



OCOM Technologies Limited is a professional supplier specialized in POS and Auto-ID applications. Our products portfolio covers Barcode Scanner, Barcode Printer, Thermal Printer, Dot Matrix Printer, Magnetic Card Reader, Data Collector, POS Terminal, and other IOT products.

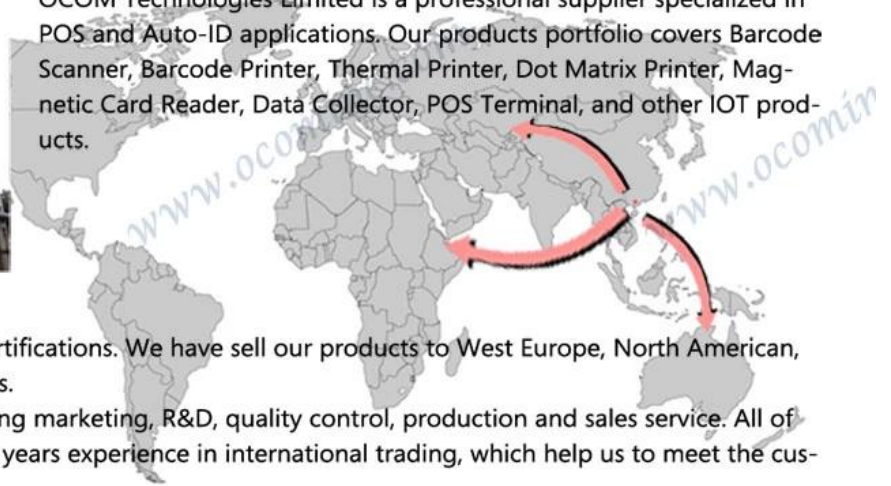

We have FCC, CE, RoHS, and other certifications. We have sell our products to West Europe, North American, Africa, Asia-Pacific and other countries.

OCOM has professional teams including marketing, R&D, quality control, production and sales service. All of the sales representatives have 3 to 10 years experience in international trading, which help us to meet the customers' needs.

OCOM have been sticking to the quality system of ISO9001:2008. We conduct strict IQC, IPQC and OQC inspection in every industrial procedure. Based on our strong capacity, the normal lead time for main products is about 3 to 7 days even for bulk order.

You can find more information of us at: www.ocominc.com,
Together we quest for the best.



