

ونقاط البيع تذكرة استلام الطابعة الحرارية Xprinter 58mm رخصة OCPP-585

(OCPP-585: نموذج)

2inch

□ □ □ □ □ □ □ □ □

1. 請說明下列各句的修辭手法及說明其效果：



□ حجم صغير وتصميم أنيق

□ يمكن أن تدفع درج النقود

□ سرعة طباعة عالية

ESPON متوافق مع

□KM الطباعة رئيس الحياة: 50

2. 58mm 鋼管、鋼管、鋼管、鋼管、鋼管:

طريقة الطباعة	مباشرة الحرارية
طباعة الكثافة	384dots / 203 DPI خط
حجم الحرف	384dots / والحرف ، الخط ANK، A: 12 * 24dots، 1.5 (W) * 3.0 (H) ملم 24 * 24 dots، 3.0 (W) * 3.0 (H) ملم / التقليدية المبسطة
نوع الباركود	JAN13 (EAN13) JAN8 (EAN8) CODE39
قيادة الطباعة	EPSON ESC / POS متوافق مع
لغة	دعم اللغة المشتري
سرعة الطباعة	90 ثانية / mm ضربات
عرض الورق	57.5 ± 0.5mm و
ورقة سماكة	0.06-0.08mm
MCBF (الحياة)	50KM
بعد	190 * 132 * 119mm
الوزن الإجمالي	1.2KG
كتر السيارات	القاطع اليدوي
الاستشعار	ورقة قرب نهاية الاستشعار، ورقة النهاية الاستشعار، غطاء استشعار مفتوحة
ورقة لغة	Φ75mm
السطح البيني	RS-232C، بالتوازي مع ذلك، USB، LAN
سائق	ESPON وين 2000، 2003، إكس بي وين، وين فيستا، ويندوز 7 متوافق مع، X، فوز 9
محول الجهد الإدخال	AC 110V / 220V، 50-60HZ
الإخراج محول الجهد	DC12V / 3A
طابعة المدخلات الجهد	DC12V / 3A
تحكم درج النقدية	DC12V / 1A
درجة حرارة العمل	0-45degree C، 80-10% الرطوبة:
درجة الحرارة إنقاذ	-10-60degree C، 90-10% الرطوبة:
شهادة	CE / FCC / CCC / بنفايات



58mm Thermal Receipt Printer

OCPP-585



Product Picture





Features

Simple but not easy

Small size and elegant design



Printing head life: 50KM



All-round show





Application Area


Food delivery, restaurant, Traffic Citation,
Logistics, Transportation, Warehouse management,
Delivery, Illegal Parking Ticket, Drugstore,
Price Tag, Retail/Farm



Parameter

Printing Method	Direct thermal
Print Density	384dots/line (203DPI)
Character Size	384dots/line, ANK character, Font: A: 12*24dots, 1.5(W)*3.0(H)mm Simplified/Traditional: 24*24dots, 3.0(W)*3.0(H)mm
Barcode Type	JAN13 (EAN13) JAN8 (EAN8) CODE39
Printing Command	Compatible with EPSON ESC/POS
Language	Buyer language support
Printing Speed	90mm/sec
Paper Width	57.5±0.5mm
Paper Thickness	0.06-0.08mm
MCBF(life)	50km
Dimension	190*132*119mm
Gross Weight	1.2KG
Auto Cutter	manual cutter
Sensor	Paper Near End Sensor, Paper End Sensor, Cover open sensor
Roll Paper	Φ75mm
Interface	RS-232C, Parallel, USB, LAN
Driver	Win 9X, Win 2000, Win 2003, Win XP, Win Vista, Win 7 compatible with ESPON
Adapter Voltage Input	AC 110V/220V, 50-60Hz

Connection

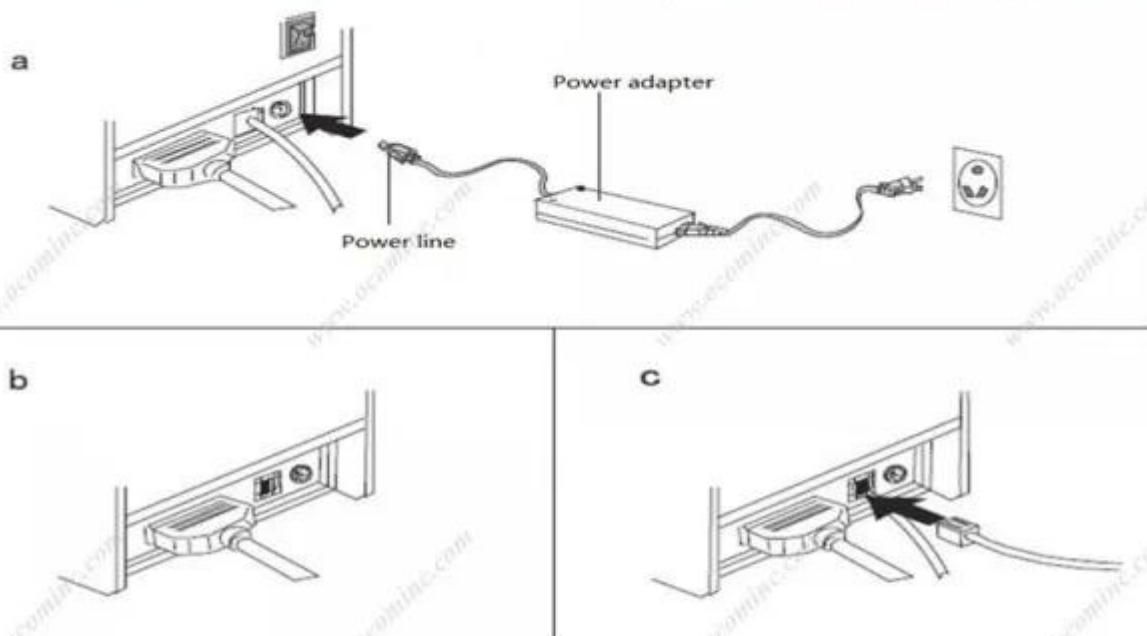

- a. Plug the DC cord connector into the printer's power connector..
- b. Plug the data cable connector into the printer's interface connector.
- c. Plug the drawer cable into the drawer kick-out connector on the back of the printer next to the interface connector.

Shipping and payment

1. Air, Sea, Express(DHL, FedEx, UPS, EMS, TNT and so on)
2. EXPRESS: around 3-7 working days to arrive

3. INTERNATIONAL AIR MAIL: usually around 2-4 days to arrive, will also depend on which destination port
4. By sea: depend on which destination port
5. T/T
6. Western Union
7. Escrow
8. L/C

Company Profile



OCOM Technologies Limited is a professional supplier specialized in POS and Auto-ID applications. Our products portfolio covers Barcode Scanner, Barcode Printer, Thermal Printer, Dot Matrix Printer, Magnetic Card Reader, Data Collector, POS Terminal, and other IOT products.



We have FCC, CE, RoHS, and other certifications. We have sell our products to West Europe, North American, Africa, Asia-Pacific and other countries.

OCOM has professional teams including marketing, R&D, quality control, production and sales service. All of the sales representatives have 3 to 10 years experience in international trading, which help us to meet the customers' needs.

OCOM have been sticking to the quality system of ISO9001:2008. We conduct strict IQC, IPQC and OQC inspection in every industrial procedure. Based on our strong capacity, the normal lead time for main products is about 3 to 7 days even for bulk order.

You can find more information of us at: www.ocominc.com,
Together we quest for the best.






Adapter Voltage Output	DC12V/3A
Printer Input Voltage	DC12V/3A
Cash Drawer Control	DC12V/1A
Working Temperature	0-45℃, Humidity: 10-80%
Saving Temperature	-10-60℃, Humidity: 10-90%
Certificate	CE/FCC/CCC/RoHS

Paper Roll Installation



- A Open the printer cover.
- B Install the roller in the roll paper, and put them into the printer.
- C Pull out some paper outside the printer and then close the printer cover.
- D Close the top cover. Press the printer cover to avoid error position of roll paper.
- E Tear-off the paper correctly.

Connection

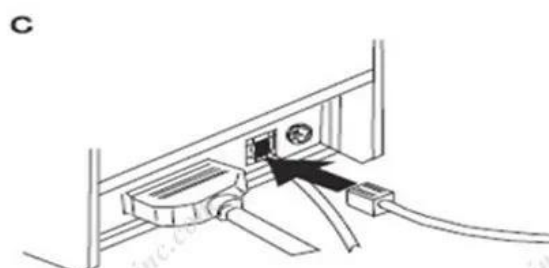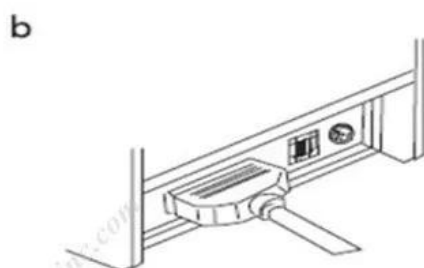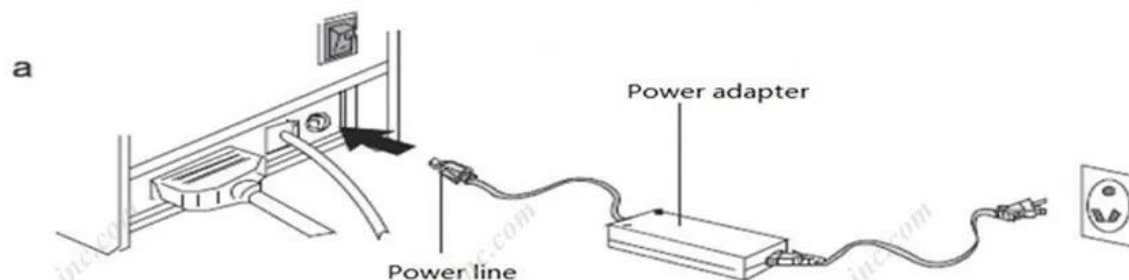

- Plug the DC cord connector into the printer's power connector..
- Plug the data cable connector into the printer's interface connector.
- Plug the drawer cable into the drawer kick-out connector on the back of the printer next to the interface connector.

Shipping and payment

- Air, Sea, Express(DHL, FedEx, UPS, EMS, TNT and so on)
- EXPRESS: around 3-7 working days to arrive

□□ □□ □□□□



LT IMG SRC = "//

sc01.alicdn.com/kf/HTB1fVxWJXXXXXc1XFXXq6xXFXXF/200551098/HTB1fVxWJXXXXXc1XFXXq6xXFXXF.jpg" = "OCPP-585 xprinter 58 mm USB = " " " " "1000" = " " "1000" = " " "171" = " " "171" GT.



LT IMG SRC = "//

sc01.alicdn.com/kf/HTB1vd8_JXXXXXbRXXXXq6xXFXXXz/200551098/HTB1vd8_JXXXXXbRXXXXq6xXFXXXz.jpg" = "OCPP-585 xprinter 58 mm USB = " " " "1000" = "1000" = "172" = "172" GT.



LT IMG SRC = "//

sc01.alicdn.com/kf/HTB1l9p_JXXXXXa.XXXXq6xXFXXXQ/200551098/HTB1l9p_JXXXXXa.XXXXq6xXFXXXQ.jpg" = "OCPP-585 xprinter 58 mm USB "172" = " " " "1000" = "1000" = "172" = GT.



LT IMG SRC = "//

sc01.alicdn.com/kf/HTB1am4YJpXXXXbZXFX760XFXXI/200551098/HTB1am4YJpXXXXbZXFX760XFXXI.png" & "171" = "177" = GT.

1.

OCOM customers'satisfaction 12 24 reworks.

2.

T / T LC .

[illegible]

3.

[illegible]

4. 如何選擇合適的數據類型 & 如何選擇合適的數據庫

00 000000 .00000000 000000 000000 0000 000000 0000 0000000 00000000 00000000 000000 0000
 0000 000000 .00000000 00000000 00 000000 0000 00 000000 00000000 00000000 0000 00000000 0000 000000
 00 0000000000 00 00000000 00 000000 00 0000000000 00000000 0000 0000 00 000000 0000000000 00000000
 SHIPMENTS. 0 / 0 0000000000 00000000 0000 00 000000 000000 00000000 uion .0000 0000 00 0000000000
 00 0000000000 000000 0000 0000 0000 0000 00000000 aliexpress:
http://www.aliexpress.com/store/403448?tracelog=minisite_CI 0000 000000 00 0000 000000 000000
 factorie 00000000

□□□□□ □□□ □□ .5 □□□□:

[illegible]6.

<http://www.possible.com.cn/cn/download.html>

7. □□□□□ □□□□

可能遇到的问题及解决方法：
 1、安装过程中出现错误，请检查网络是否正常。
 2、安装完成后无法启动，请尝试重新安装。
 3、使用过程中遇到任何问题，请访问<http://www.possolution.com.cn/video.html>。

8.

--	--	--

--	--	--	--	--	--

[illegible]

9. □□□□□□□□

□□ □□□□ □□□ □□□ <http://www.possolution.com.cn/inquiry.html>

[illegible]

A 1D lattice with 16 sites. Sites 1-8 are blue, 9-10 are grey, 11-14 are blue, and 15-16 are grey. Sites 9 and 15 are labeled 't'.

A horizontal chain of 20 blue-outlined squares representing lattice sites. The chain is divided into four groups of five squares each by gaps. The second and fourth groups are shaded light gray. The first square of the second group is labeled with a blue italic i below it. The first square of the fourth group is labeled with a blue italic $i+1$ below it.

معلومات عامة عن الشركة ، معلومات عامة ،

معلومات عامة ،

منتجات نقاط البيع الطرفية الأخرى

معلومات عامة عن الشركة ، معلومات عامة ،

معلومات عامة عن الشركة ، معلومات عامة عن الشركة POS ،

معلومات عامة عن الشركة ، معلومات عامة عن الشركة ،

معلومات عامة عن الشركة