

電源電圧 電流 消費電力:	DC 24V / 1A
寸法 (幅 x 高さ):	幅 80 mm x 高さ 10 mm (45 mm x 0 mm) (幅 x 高さ)
寸法 (幅 x 高さ):	幅 (幅 80-10) mm x 高さ (45-0) mm (幅 x 高さ) (幅 x 高さ)
動作温度範囲:	90 ~ 10) mm (°C 60 ~ 10-) (幅 x 高さ)
寸法 (幅 x 高さ):	ANK FontA: 1.5 * 3.0mm / FontB: 1.1 * 2.1mm
寸法 (幅 x 高さ):	UPC-A / UPC-E / JA (EAN13) / JAN8 (EAN8 / CODE39 / ITF / CODE93 / CODE128 (幅 x 高さ QR x PDF 417 (幅 x 高さ))
寸法 (幅 x 高さ):	PC347 (Standard Europe) Katakana PC850 (Multilingual) PC860 (Portuguese) PC863 (Canadian-French) PC865 (Nordic) West Europe Greek Hebrew East Europe Iran WPC1252 PC866 (Cyrillic # 2) PC852 (Latin2) PC858 IranII (幅 x 高さ) PT151 (1251)
寸法 (幅 x 高さ):	幅 1.25 : (幅 x 高さ)





OCPP-80Y





OCPP-80Y






OCPP-80Y







محول الطاقة للخيار:

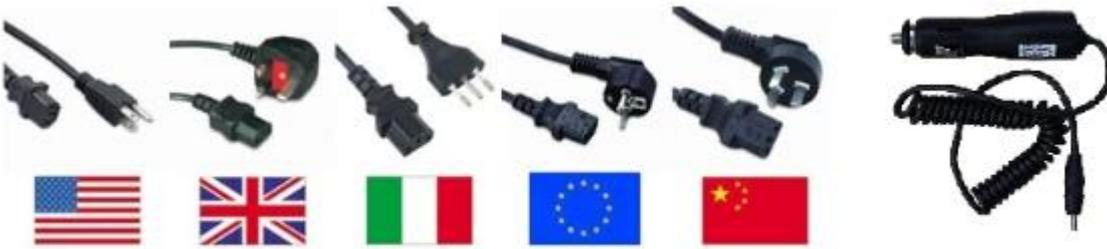

منطقة التطبيق:

▶ Application scenario

Logistics



Warehouse management



Supermarket



Clothing label



Jewelry label



Restaurant



منتجات ذات صلة:

[عالية السرعة 80 مم POS طابعة حرارية](#)