

# 2D Barcode POS Receipt OCPP-58C

## Specifications

Model	OCPP-58C
Resolution	384dots/line
Print Speed	ANK 12x24dots B 9x17dots / 24x24dots
Barcode	UPC-A/UPC-E/JAN13/EAN13/JAN8/EAN8/ CODABAR/ITF/CODE39/CODE93/CODE128
Interface	USB / LAN
Power	DC 12V 2.6A ==
Power	12V 1A ==
Temperature	50
Humidity	0~45°C 10~80%
Weight	10~60g 10~90g
Size	120mm
Length	57.5±0.5mm
Width	65mm
Thickness	0.06~0.08mm
Material	1.5KG 2.5kg
Dimensions	199 * 132 * 111.5mm
OS	Win9X/Win ME/Win2000/Win2003/WinNT/Win XP / Win VISTA/WIN7 / Win8
Language	English
Printer	EPSON ESC / POS
Price	3.75

## Notes



**58mm Thermal Printer  
with Auto-cutter and Big Gear**

**OCPP-58C**

**Product Picture**






## Features


***Simple but not easy***

Fashionable appearance design





Big gear design, superwear resistant



High printing speed up to **120mm/s**  
for text or image



Support multiple languages

Long life, printing head life: 50KM



## All-round show





## Application Area

Food delivery, restaurant, Traffic Citation,  
Logistics, Transportation, Warehouse management,  
Delivery, Illegal Parking Ticket, Drugstore,  
Price Tag, Retail/Farm



## Demomster

## Parameter

Print method	Direct thermal
Print density	384dots/line
Character size	ANK, Font A: 12x24dots Font B: 9x17dots Simplified/traditional Chinese: 24x24dots
Bar code	UPC-A/UPC-E/JAN13(EAN13)/JAN8(EAN8)/CODABAR/ITF/CODE39/CODE93/CODE128
Interface	Parallel/Serial/USB/LAN
Power supply	DC 12V==2.6A
Cash drawer	DC 12V==1A
Printing head lifetime	50 kilometers
Operating Conditions	Temperature (0~45 Deg C), humidity (10~80%)
Storage Conditions	Temperature (-10~50 Deg C), humidity (10~90%)
Print speed	120mm/s
Paper width	57.5±0.5mm
Paper	


external diameter	65mm
Paper thickness	0.06~0.08mm
Weight	Net weight: 1.5KG, Gross weight: 2.5kg
Dimension	199*132*111.5mm
Driver	Win9X/Win ME/Win2000/Win2003/WinNT/Win XP/Win Vista/Win7/ Win8
Cutter	Auto cutter
Command	Compatible with EPSON ESC/POS
Line Spacing	3.75mm(Can change through command)

## Paper Roll Installation



- A Open the printer cover.
- B Install the roller in the roll paper, and put them into the printer.
- C Pull out some paper outside the printer and then close the printer cover.
- D Close the top cover. Press the printer cover to avoid error position of roll paper.

## Connection

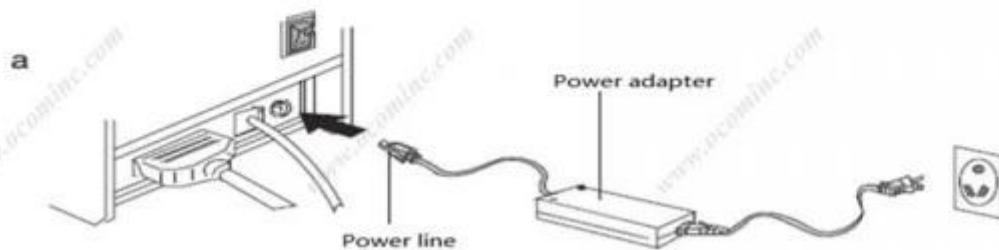

- a. Plug the DC cord connector into the printer's power connector..
- b. Plug the data cable connector into the printer's interface connector.
- c. Plug the drawer cable into the drawer kick-out connector on the back of the printer next to the interface connector.

## Shipping and payment

1. Air, Sea, Express(DHL, FedEx, UPS, EMS, TNT and so on)
2. EXPRESS: around 3-7 working days to arrive
3. INTERNATIONAL AIR MAIL: usually around 2-4 days to arrive, will also depend on which destination port
4. By sea: depend on which destination port
5. T/T
6. Western Union
7. Escrow

## Company Profile



OCOM Technologies Limited is a professional supplier specialized in POS and Auto-ID applications. Our products portfolio covers Barcode Scanner, Barcode Printer, Thermal Printer, Dot Matrix Printer, Magnetic Card Reader, Data Collector, POS Terminal, and other IOT products.

We have FCC, CE, RoHS, and other certifications. We have sell our products to West Europe, North American, Africa, Asia-Pacific and other countries.

OCOM has professional teams including marketing, R&D, quality control, production and sales service. All of the sales representatives have 3 to 10 years experience in international trading, which help us to meet the customers' needs.

OCOM have been sticking to the quality system of ISO9001:2008. We conduct strict IQC, IPQC and OQC inspection in every industrial procedure. Based on our strong capacity, the normal lead time for main products is about 3 to 7 days even for bulk order.

You can find more information of us at: [www.ocominc.com](http://www.ocominc.com),  
Together we quest for the best.



□□□□

\*□□□

\*IP□□□□□□

\*□□□

\*□□Windows□□□□□

\*Linux□□□□

\*□□□□□□□□

\*□□□□