

## 2 USB

### M / N OCBP -006

1. /
- 2.
- 3.
- 4.
- 5.
- 6.

|  |   |
|--|---|
|  |   |
|  | 203DPI  |
|  | 20-60mm   |
|  | MAX 127/MIN 50.8/   |
|  | DRAM 4M 4M  |
|  |   |
|  |   |
|  | USB   |
|  |   |
|  | CODE128EAN128ITFCODE39CODE93EAN13EAN13 + 2EAN13 + 5EAN8EAN8 + 2EAN8 + 5CODABARPOS TNETUPC-AUPCA + 2UPCA + 5UPC-EUPCE + 2UPC-E + 5C POS T.MSICMSICPLESSEYITF14EAN14 QR DM PDF417 |
|  | 08  |
|  | 0°90°270° 360° 110; 0°90°270° 360°  |
|  | PCXBMPFLASHDRAM   |
|  |   |
|  | 2060  |
|  | MAX 80  |
|  | MIN 25  |
|  |   |
|  | DC12V3A   |
|  | 1.04KG  |
|  | 190D×135W×137Hmm  |
|  | 45°C20 - 80   |
|  | - 4055°C≤93RH40°C   |
|  |   |










OCBP-006

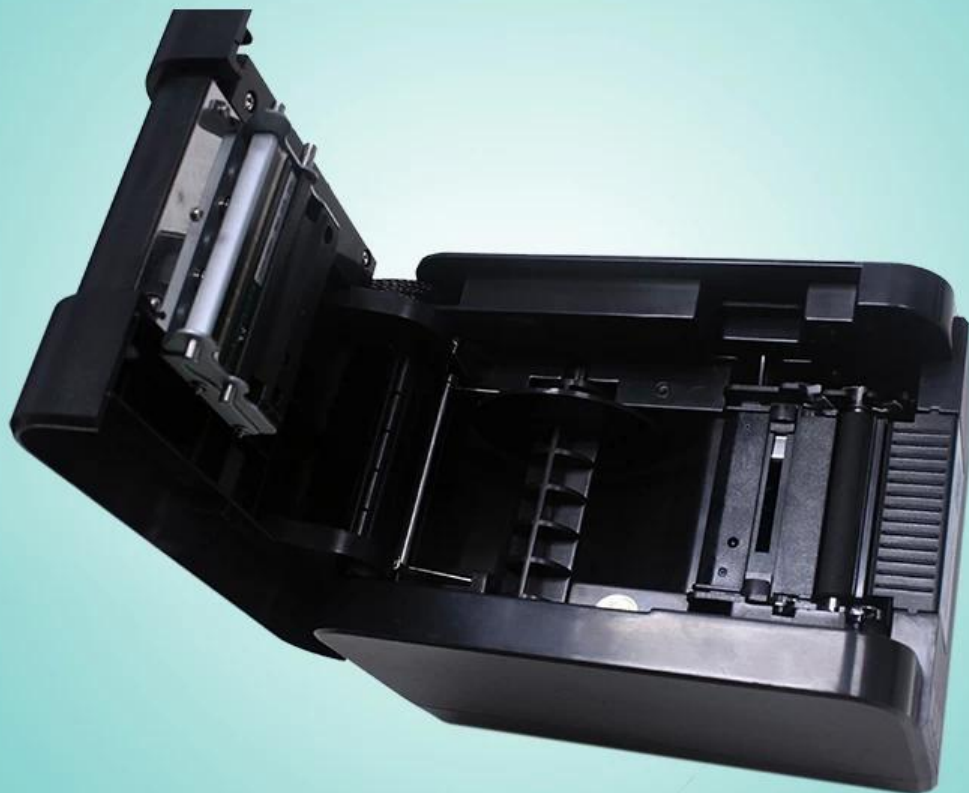



OCBP-006



□□□□

OCOM□□□□□□□□□□