

# 58mm热敏打印机OCPP-58C-L LAN /热敏纸

## 热敏OCPP- 58C-热敏

### 1.特点

热敏纸 热敏  
热敏纸  
热敏120mm / s热敏纸  
热敏cEPSON ESC / POS热敏 热敏  
热敏纸 热敏50KM

热敏uto热敏

热敏NV Logo热敏

热敏热敏

热敏热敏

热敏热敏

热敏Win 9X / Win ME / Win2000 / Win 2003 / Win NT / Win XP / Win Vista / Win7 / Win8

### 2.规格

|       |                                                                                         |
|-------|-----------------------------------------------------------------------------------------|
| 热敏    | 热敏                                                                                      |
| 热敏    | 384dots /热敏                                                                             |
| 热敏    | ANK热敏 A热敏12x24热敏<br>热敏B热敏9x17热敏<br>热敏/热敏24x24热敏                                         |
| 热敏    | UPC-A / UPC-E / JAN13热敏EAN13热敏/ JAN8热敏EAN8热敏/ CODABAR / ITF / CODE39 / CODE93 / CODE128 |
| 热敏    | Paralle热敏/热敏/ USB/ LAN                                                                  |
| 热敏 热敏 | DC 12V==2热敏6热敏                                                                          |
| 热敏    | DC 12V==1A                                                                              |
| 热敏热敏  | 50 热敏                                                                                   |
| 热敏热敏  | 热敏0热敏45°C热敏热敏10热敏80热敏                                                                   |
| 热敏 热敏 | 热敏-10热敏60°C热敏热敏10热敏90热敏                                                                 |
| 热敏热敏  | 120热敏/热敏                                                                                |
| 热敏热敏  | 57.5±0.5热敏                                                                              |
| 热敏 热敏 | 65热敏                                                                                    |
| 热敏热敏  | 0.06热敏0.08热敏                                                                            |
| 热敏    | 热敏热敏1.5KG热敏热敏2.5kg                                                                      |
| 热敏    | 199 * 132 *111.5热敏                                                                      |
| 热敏    | 热敏Win9X /热敏 ME / Win2000热敏/ Win2003热敏/ WINNT /热敏 XP/热敏 热敏/Win7热敏/ 热敏8                   |
| 热敏热敏  | 热敏uto热敏                                                                                 |
| 热敏    | 热敏...热敏 EPSON ESC / POS                                                                 |
| 热敏热敏  | 3.75mm热敏热敏热敏热敏                                                                          |



## 58mm Thermal Printer with Auto-cutter and Big Gear OCP-58C



### Product Picture





## Features

**Simple but not easy**

Fashionable appearance design





Big gear design, superwear resistant



High printing speed up to 120mm/s  
for text or image



Support multiple languages

Long life, printing head life: 50KM



## All-round show





## Application Area

Food delivery, restaurant, Traffic Citation,  
Logistics, Transportation, Warehouse management,  
Delivery, Illegal Parking Ticket, Drugstore,  
Price Tag, Retail/Farm



## Parameter

## Parameter

|                        |                                                                                         |
|------------------------|-----------------------------------------------------------------------------------------|
| Print method           | Direct thermal                                                                          |
| Print density          | 384dots/line                                                                            |
| Character size         | ANK, Font A: 12x24dots<br>Font B: 9x17dots<br>Simplified/traditional Chinese: 24x24dots |
| Bar code               | UPC-A/UPC-E/JAN13(EAN13)/JAN8(EAN8)/CODABAR/ITF/CODE39/CODE93/CODE128                   |
| Interface              | Parallel/Seris/USB/LAN                                                                  |
| Power supply           | DC 12V==2.6A                                                                            |
| Cash drawer            | DC 12V==1A                                                                              |
| Printing head lifetime | 50 kilometers                                                                           |
| Operating Conditions   | Temperature (0~45 Deg C), humidity (10~80%)                                             |
| Storage Conditions     | Temperature (-10~60 Deg C), humidity (10~90%)                                           |
| Print speed            | 120mm/s                                                                                 |
| Paper width            | 57.5±0.5mm                                                                              |
| Paper                  |                                                                                         |




|                   |                                                                |
|-------------------|----------------------------------------------------------------|
| external diameter | 65mm                                                           |
| Paper thickness   | 0.06~0.08mm                                                    |
| Weight            | Net weight: 1.5KG, Gross weight: 2.5kg                         |
| Dimension         | 199*132*111.5mm                                                |
| Driver            | Win9X/Win ME/Win2000/Win2003/WinNT/Win XP/Win Vista/Win7/ Win8 |
| Cutter            | Auto cutter                                                    |
| Command           | Compatible with EPSON ESC/POS                                  |
| Line Spacing      | 3.75mm(Can change through command)                             |

## Paper Roll Installation



- A Open the printer cover.
- B Install the roller in the roll paper, and put them into the printer.
- C Pull out some paper outside the printer and then close the printer cover.
- D Close the top cover. Press the printer cover to avoid error position of roll paper.

## Connection

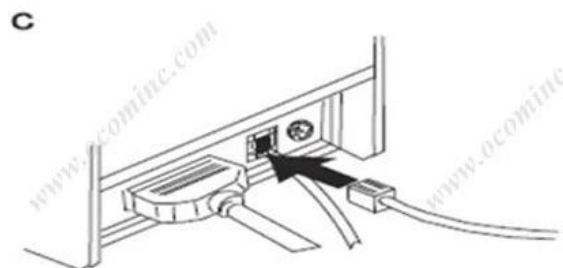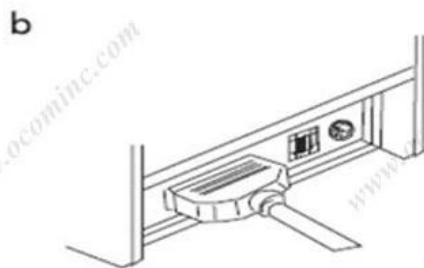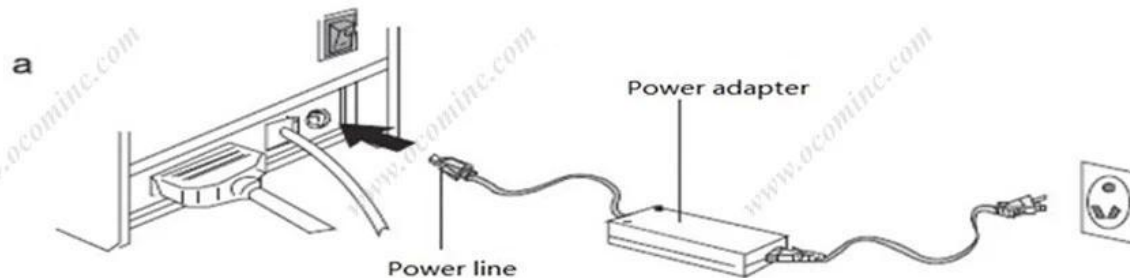

- a. Plug the DC cord connector into the printer's power connector..
- b. Plug the data cable connector into the printer's interface connector.
- C. Plug the drawer cable into the drawer kick-out connector on the back of the printer next to the interface connector.

## Shipping and payment

1. Air, Sea, Express(DHL, FedEx, UPS, EMS, TNT and so on)
2. EXPRESS: around 3-7 working days to arrive
3. INTERNATIONAL AIR MAIL: usually around 2-4 days to arrive, will also depend on which destination port
4. By sea: depend on which destination port
5. T/T
6. Western Union
7. Escrow

## Company Profile



OCOM Technologies Limited is a professional supplier specialized in POS and Auto-ID applications. Our products portfolio covers Barcode Scanner, Barcode Printer, Thermal Printer, Dot Matrix Printer, Magnetic Card Reader, Data Collector, POS Terminal, and other IOT products.

We have FCC, CE, RoHS, and other certifications. We have sell our products to West Europe, North American, Africa, Asia-Pacific and other countries.

OCOM has professional teams including marketing, R&D, quality control, production and sales service. All of the sales representatives have 3 to 10 years experience in international trading, which help us to meet the customers' needs.

OCOM have been sticking to the quality system of ISO9001:2008. We conduct strict IQC, IPQC and OQC inspection in every industrial procedure. Based on our strong capacity, the normal lead time for main products is about 3 to 7 days even for bulk order.

You can find more information of us at: [www.ocominc.com](http://www.ocominc.com),  
Toaether we auest for the best.



0000Harold Hu  
 OCOM000000  
 000000000000000000001040000518054  
 000www.ocominc.comwww.possolution.com.cn;  
 0000sales14@ocominc.com;  
 Skype00sales14@ocominc.com  
 MSN00comsales14@hotmail.com;  
 Whatsapp0086.18948789890;  
 0001894878989000comsales1400;  
 00086.18948789890;  
 QQ001467261417;  
 0000086.755.86053207-814;  
 0000086.755.86053207-8680