

CR003IC IC USB IC

M / N CR003IC

IC

CR003IC IC IC

IC IC

IC

IC;


IC = 0 IC = 1 CPU;

IC USB IC Android

3. IC

IC	USB RS232
IC	-20°~60°C IC 0°~50°C IC
IC	15 85
IC	116 36 38.4 IC
IC	
IC	> 200,000
IC	0.75mm
IC IC	20
IC IC	50
IC	25
IC	AT24C01A / 24C02 / 24C04 / 24C08 / 24C16 / AT24C64 SLE4432 / 4442 SLE4418 / 4428 ISSI 24C01A / 16 ISO7816-1-4 IC = 1 IC = 0
IC	
IC	ISO 7811 AMMV CADMV IC
IC	3~60 IC/IC
IC	> 60000
IC position	3
IC	0.76 1.2mm

RFID	7
RFID	
RFID	13.56MHz ISO / IEC14443A / B.
RFID	> 600000
RFID	1-4cm

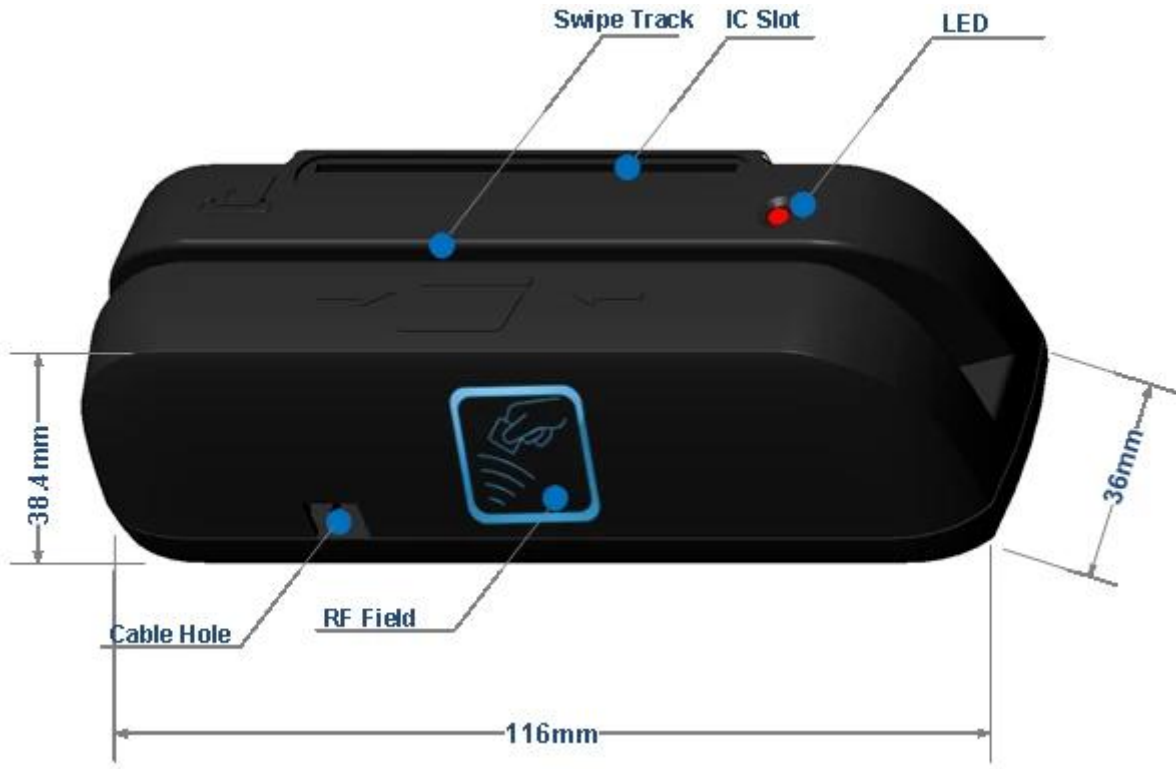



CR003IC





CR003IC





CR003IC





CR003IC





CR003IC





CR003IC





CR003IC





CR003IC

