

CR003IC

M / N CR003IC

CR003IC

CR003IC IC

CR003IC


T = 0 T = 1 CPU;

USB Android

3.

IC	USB RS232
IC	-20°~60°C 0°~50°C
IC	15 85
IC	116 36 38.4
IC	
IC	> 200,000
IC	0.75mm
IC	20
IC	50
IC	25
IC	AT24C01A / 24C02 / 24C04 / 24C08 / 24C16 / AT24C64 SLE4432 / 4442 SLE4418 / 4428 ISSI 24C01A / 16 ISO7816-1-4 T = 1 T = 0
IC	
IC	ISO 7811 AMMV CADMV
IC	3~60
IC	> 600000
IC position	3
IC	0.76 1.2mm
IC	7

RFID	
Frequency	13.56MHz ISO / IEC14443A / B.
Capacity	> 600000
Reading Distance	1-4cm

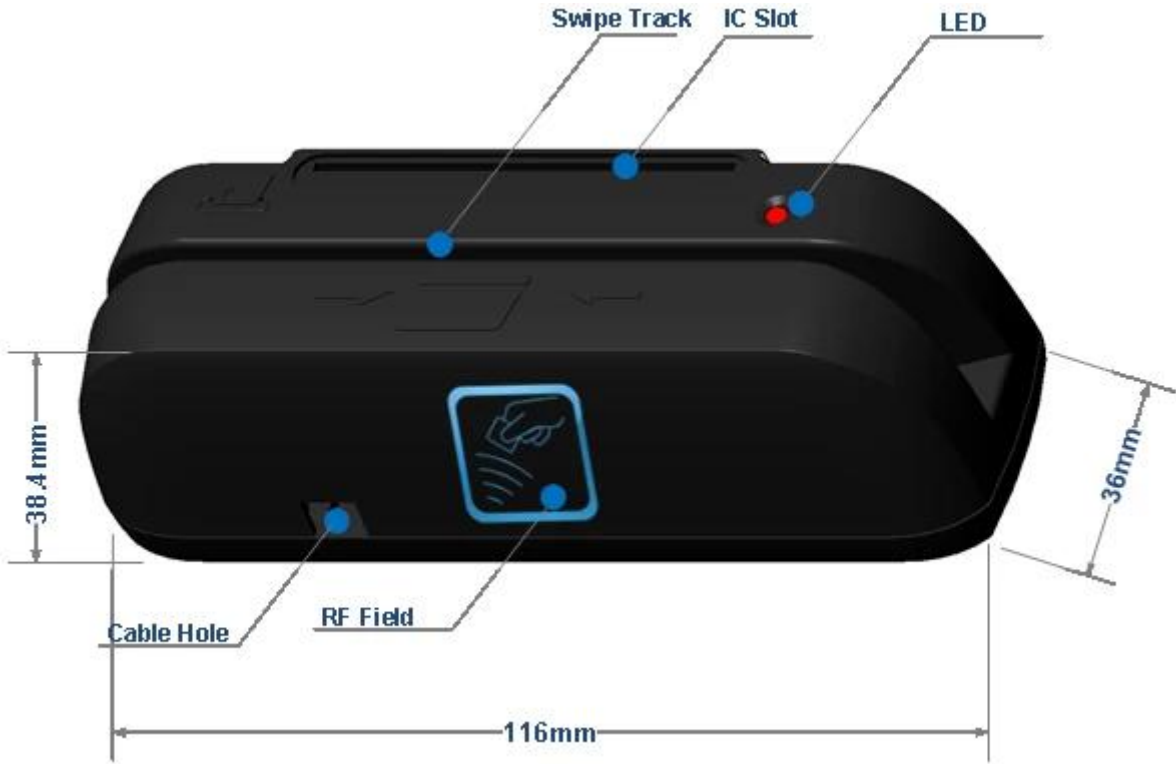



CR003IC





CR003IC





CR003IC





CR003IC





CR003IC





CR003IC





CR003IC





CR003IC

