

XXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXX



[M / N]OCBP -008

□□□

□□□□□□□□□□

200mm / s8" / s□□□□□□□□□□□□□□□□□□;

300m□□□□□□□□214mm□8.4"□OD□□□□□□□□;

8MB□□□8MB SRAM□□

□TSPL / EPL / ZPL / DPL□□□□□□□□□□□□□□□□□□;

□□USB2.0□□

Bartender□□□□□□□& Windows□□□□□□□□□□;

□□□□□

□□□	8□/ mm□203dpi□
□□□□	□□□/□□□
□□□□□□	200□□□8□□□/□
□□□□□□	104□□□4.09□□□□


重量	1778g(70g)
寸法	約127mm(5インチ)
幅	25.4~115mm
厚さ	0.06~0.25mm
長さ	10~1778mm
ディスプレイ	約127mm(5インチ)
制動方式	ABS
筐体寸法	246mm(幅)×223mm(高さ)×204mm(厚さ)
消費電力	2.47W
CPU	32bit RISC CPU
メモリ	8MBフラッシュメモリ、8MB SDRAM、Micro SDカードスロット、最大4GB
接続	USB 2.0 / TF; RS-232 / 赤外線 / WIFI / Bluetooth
バーコード	1D: Code 39, Code 93, Code 128, UCC, Code 128A, B, C Codabar, Interleaved 2 of 5, EAN-8, EAN-13, EAN-128, UPC-A, UPC-E, EAN UPC 2D, MSI, PLESSEY, POS TNET, POS T, GS1 DataBar, Code 11 2D: PDF-417, Maxicode, DataMatrix, QR, Aztec
通信規格	①RS-232 2400-115200 bps ②Bluetooth ③WiFi ④Bluetooth ⑤Bluetooth ⑥LCD/LEDディスプレイ
認証	FCC, CE, CB, CCC
動作温度	0~50°C / 32~122°F (標準) -10~90°C / 14~140°F (拡張)
保存温度	-40~60°C / -40~140°F (標準) -10~90°C (拡張)









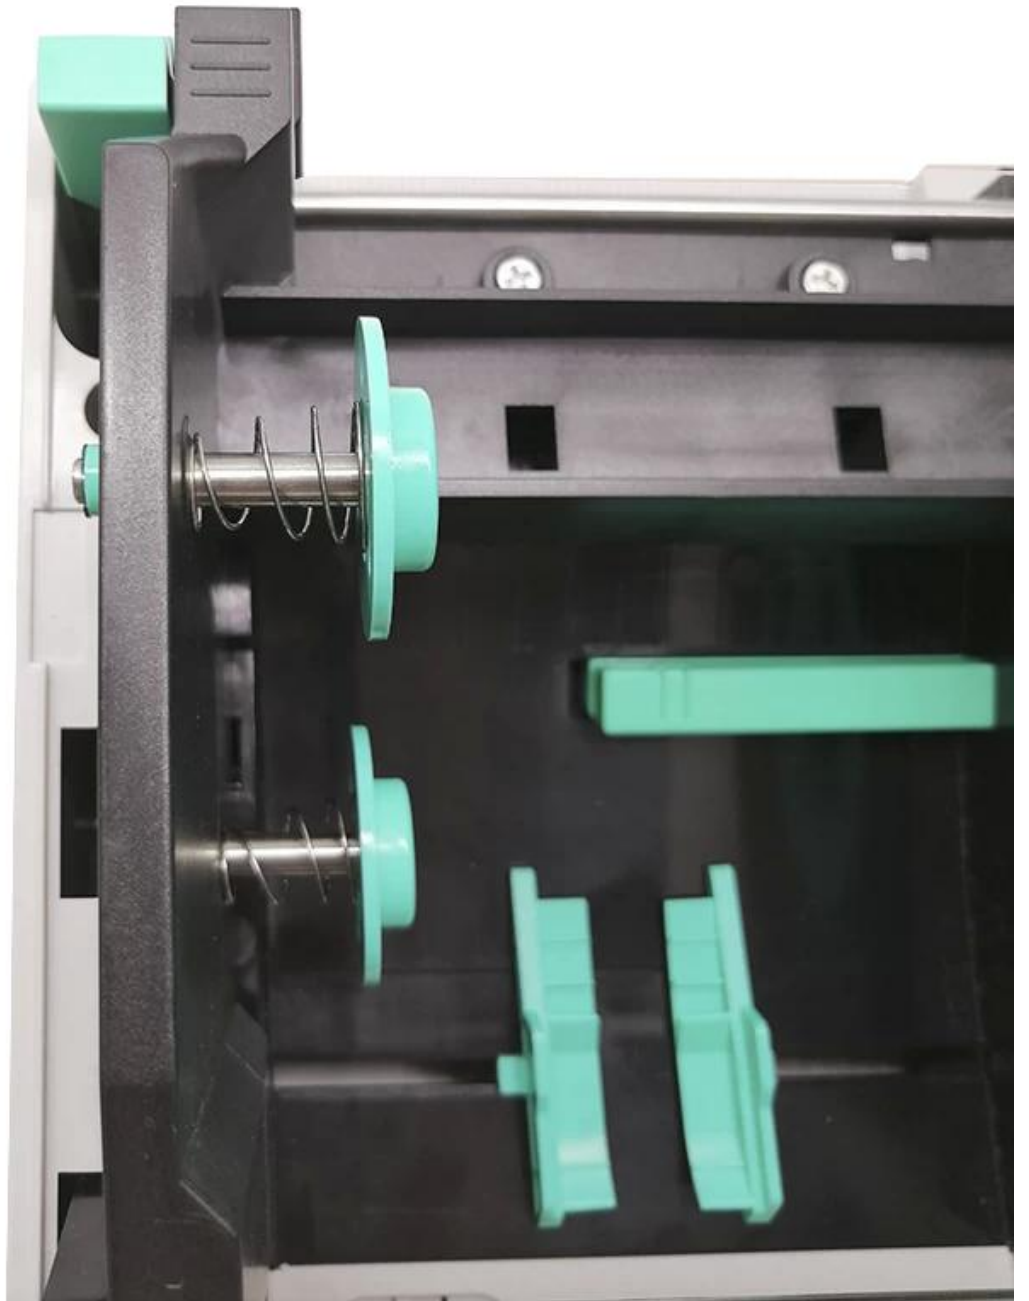

OCOM

OCOM 提供 POS Auto-ID 500

OCOM 提供 DOT POS POS 符合 ISO CE FCC BIS

2007 年 6 月 OCOM 符合 ISO9001 2008 年 159 年 2300 年 50 年 O2 Equicom

OCOM 提供 " " OEM / ODM

□□□□□□□□

▶ Company



▶ Certificates



▶ Payment



OCOM

· POS

· 500

· O2 Star

· 2600 163

· 24

· 12 OEM / ODM

·

· ISO 9001 FCC CE Rohs Soncap SASO POA BIS

· MOQ

· 12 + 1

· “

· “



