

OCBS PDA Android

M / N OCBS -A100

OCOM 24



- Android 7.1
- 1G RAM + 8G ROM / 2G RAM + 16G ROM
- 4.0" 480 * 800 WVGA IPS
-
- 4G
- 2.4G + 5G wifi
- 3.7V 3200Ah
- IP54 / 1.5m
- 800mAh LED
- 1D / 2D
- POGO PIN
- GPS / NFC
- " " - "

00		
0000		
00	16200000x7300000x2000000±200	
00	0002660000000000	
00	4.000TFT-LCD0WVGA 480x8000000000	
00	LED00	
00	30TP0023000004000	
00	2 SIM01 TF	
00	000000000003.7V03200mAh	
00000		
000000	00000	
00000	Android 7.1	
00	1GB RAM + 8GB ROM02GB RAM + 16GB ROM0MicroSD00032GB000	
00000		
00000	-20°C050°C	
00000	-20°C070°C	
00	50RH0950RH000000	
00000	000000000000500/1.500000000	
00	IP54000IEC00	
00000		
SDK	HHW0000000	
00	Java0	
00	Android Studio0Eclipse	
00000		
WWAN	TDD-LTE0FDD-LTE0 B1 / B2 / B3 / B5 / B7 / B8 / B20 / B38 / B39 / B40 / B41	
WLAN	IEEE 802.11 a / b / g / n 2.4G + 5G	
WPAN	00v4.1 + BR / EDR + BLE	
000000		
000000000000		
1D00	0000000	00uE966000004313000
	00	0000000000
00000	2D CMOS0000	00ME54800000003680000
	00	PDF4170MicroPDF4170Com pos ite0RSS0TLC-390Datamatrix0QR00Micro QR 00Aztec0MaxiCode0Pos tal000000Pos tNet0000000000Pos tal000000Pos tal00 0Pos tal000Pos tal0000
RFID00000000		
RFID HF	00	13.56MHz0
	00	ISO 14443A& 15693
	R / W00	2000800
00		
00	1xPower00	
	1x0000000	
	1xDC0000	
	1xUSB0000	
000	0000GPS0NFC	

Android Industrial Data Terminal

M/N:OCBS-A100



1D/2D Scanner



4G



2.4G+5G WIFI



Bluetooth



Camera



Rugged IP54



HD Big Screen

4.0 inch high quality touch screen, 480 * 800 WVGA IPS display, high resolution, full-view, visible under outdoor bright light, easy to handle in outdoor.



High quality
touch screen




Full-view



High Configuration

Adopts Qualcomm quad core Android 7.1 system, 2GB RAM+16GB ROM storage, safe and stable, can run multiple applications at the same time smoothly.

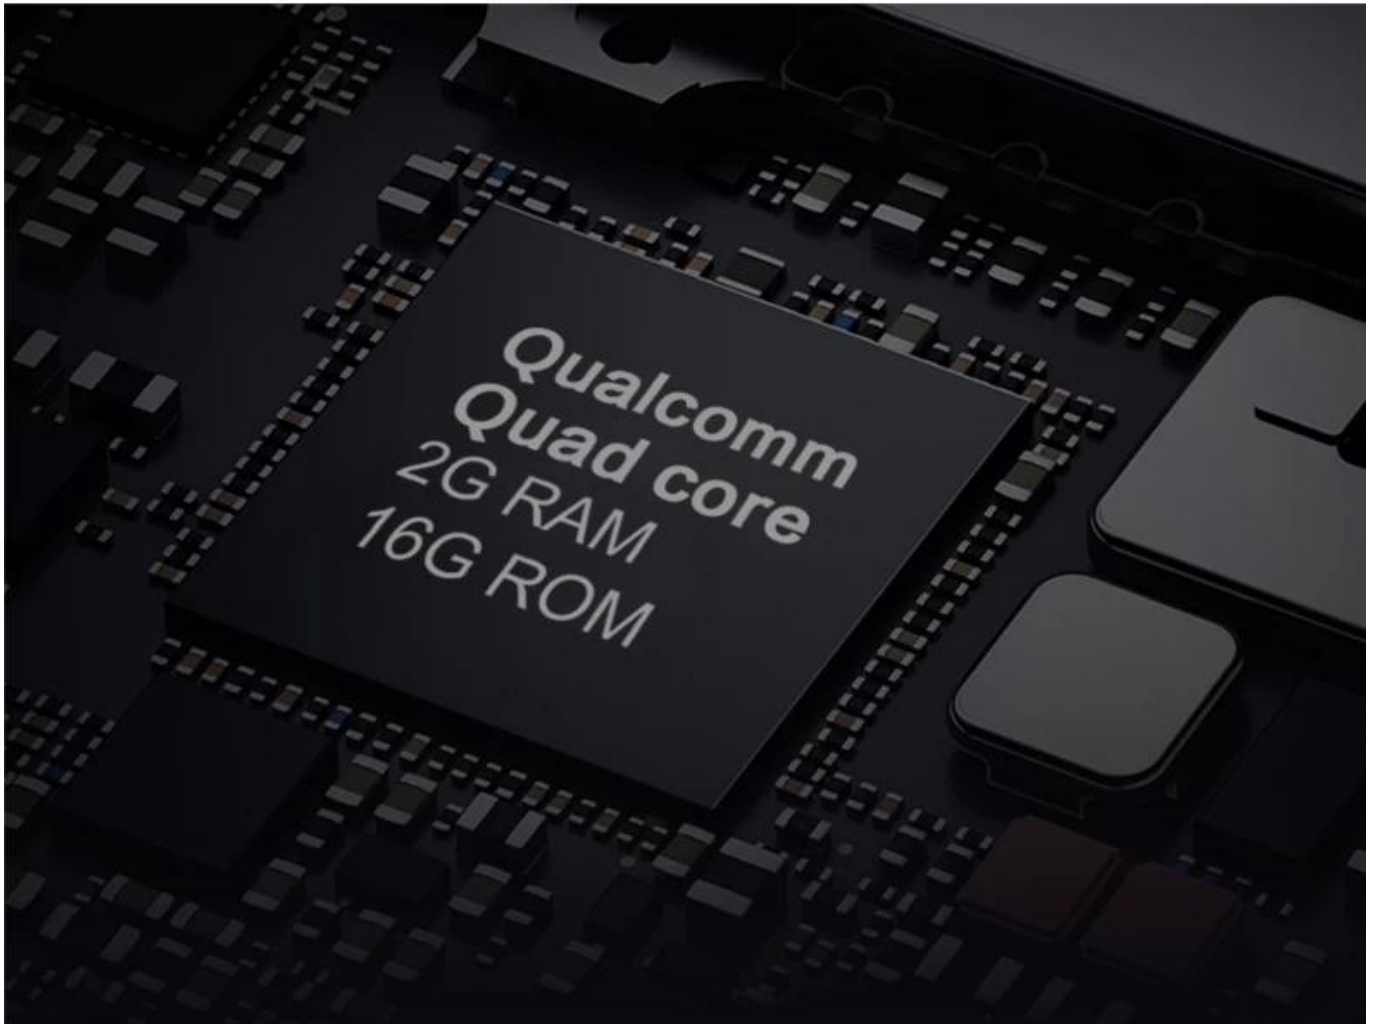

Professional Scanning Code

Professional barcode scanner, with 1D/2D for option.



High Efficiency Scanning

Industrial professional barcode scanner, ability to scan incomplete barcode, wrinkle barcode, fuzzy barcode, high-light barcode, wide scanning field of view, fast and accurate scanning, highly enhance the work efficiency.



Incomplete
Barcode



Wrinkle
Barcode



Fuzzy
Barcode



High-light
Barcode



Data Transmission



4G
Communication



2.4G+5G
Dual Mode WIFI



Support Bluetooth 4.1
Backward Compatibility

Application And Secondary Development

Flexible customization of brand, model number, item code and other specification, easy to adapt to the user's existing application APP and secondary development.



Industrial Protection Design

Adopt Industrial grade raw materials, rugged IP54 /1.5m drop tolerance, satisfies the outdoor dustproof and waterproof application, truly achieve anti-fall, rugged and durable function.



8 Million Pixel Camera

Adopts 8 million pixel camera with auto focus, Optional LED flash, auto-fill light, effectively improve shooting effect under weak light.

Photo	8 Million Pixel
Video	Support
Auto Focus	Support
Auto Fill Light	Support



Long Lasting

Built in 3.7V 3200Ah rechargeable Lithium-ion Battery, can work continuously up to 10-12 hours, standby time up to 72hours, meet the high workload requirements.



Fast Charging

Professional POGO PIN interface, fast charging, reduce the loss of batteries and mainframe at the same time.



POGO PIN Interface

Portable And Easy To Use

Nice appearance, easy to hold and carry.



Industrial Handheld PDA
With keypad, long life span



With back wristband
to prevent slip

Application

Warehousing Management



Logistics



Clothing Industry




Supermarket



Library



Manufacturing Industry

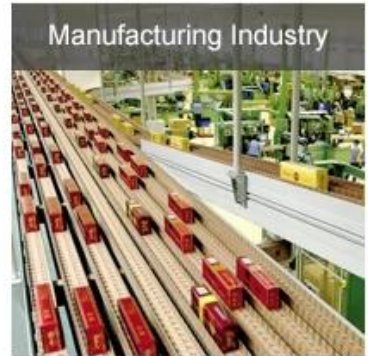

Inspection Law Enforcement




Electricity Meter Reading



Food Security Inspection



Package

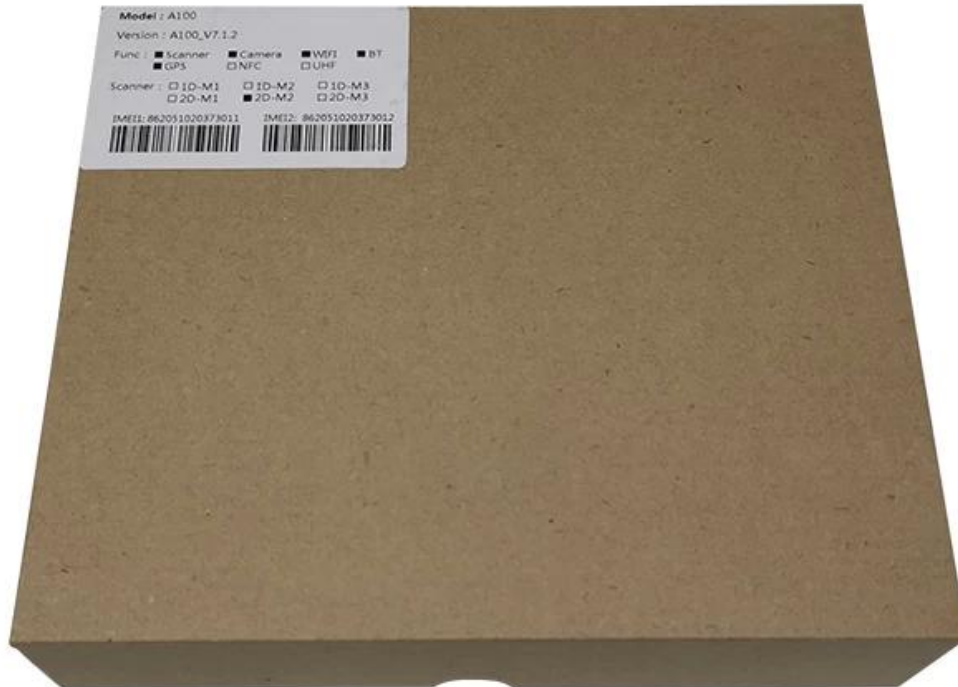

□□□□□

OCOM□□□□□POS□Auto-ID□□□□□□□□□□500□□□□□□□□□□□□□□□□

OCOM DOT POS POS
ISO CE FCC BIS

2007年6月，OCOM按照ISO9001:2008标准，通过了159项、2300个、50个、O2 Equicom

OCOM " " OEM / ODM

□ □ □ □ □ □ □ □ □ □

► Company



► Certificates



► Payment



OCOM

· POS

· 500

· O2 Star

· 2600 163

· 24

· 12 OEM / ODM

·

· ISO 9001 FCC CE Rohs Soncap SASO POA BIS

· MOQ

· 12 + 1

· “

· “



