

M / N OCBS -E7

| ABS + ☐

□□□□□	
□□	OCBS -E7
□□	□□
CPU□□	72MHz□
□□	T9
□□	16KB
□□□□□	16MB
□□□□□	2.4' "
□□□□	16□□□□□65536□□
□□□	240 * 320
□□	□□□□□□□□3.7V□1900mAh□
□□□□	16□□□
□□	15□
□□	138□□×60×30□□

	ABS +	
		160
		8
EMC		CE& FCC DOC
		650nm
		100±2
		3mil
		20@220@200
		0~250mm0.33mmPCS 90
		30°
		65°
		55°
		30
		/
		1/500
		LCD
		EAN-8EAN-13UPC-AUPC-ECode 39Code 93Code 128EAN128CodaberIndustool 2 of 5Interleave 2 of 5Matrix 2 of 5MSI
	USB 2.0	
	433MHzMax.300m	
		-20°C60°C
		0°C45°C
		595
	Lumination	5000 Lux





Wireless signal indication

Clear color screen

USB signal base station

External short antenna

Power indicator

Scan button
Return key

Input decimal point

Input method switch

Turn on/off





Signal base stations

Plug and play


Original filter



Comfortable and durable key

Fuselage anti-skid



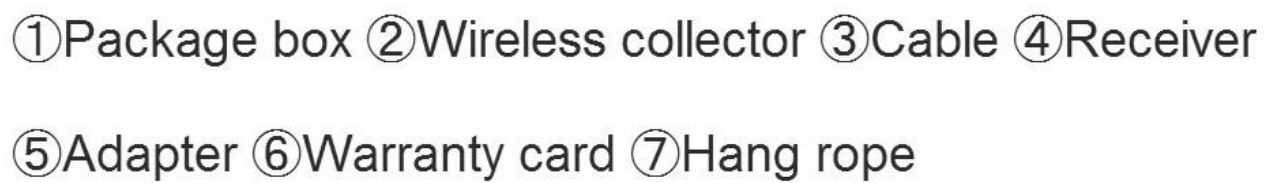

OCOM ODM OEM /

□□□□□□□□

► Company



► Certificates



► Payment



OCOM

· POS

· 500

· O2 Star

· 2600 163

· 24

· 12 OEM / ODM

·

· ISO 9001 FCC CE Rohs Soncap SASO POA BIS

· MOQ

· 12 + 1

· “

· “



