

USB

OCPP-M07



Windows Java Linux Android IOS

USB RS232

Android IOS WIN CE SDK

QR

57 * 50

8 Android Apple

1500mAh 4.5

90mm /

100km

ESC / POS

××××××××××××	105×75×45	
	134	
	ESC / POS	
	48	
	90mm / sec	
	8/203dpi	
	12x24 / 24x24	
	32 / 16	
	1.5 x 3.0x / 3.0x3.0x	
	58.0±0.1mm x50.0mm	
	0.060.08mm	
	/	
	USBRS-232	
FLASH	256KB	
	9V DC / 2A	
	7.4V DC / 1500mAh;4-5120-150m	
	-1050°C1090	
	-2070595	
	30ASCII	
	" 1234"6	
	3.5 * 1.1	
	OCPP -M07-BB	AndroidUSB + COM +
	OCPP -M07-BB-AI	Android + IOSUSB + COM +
	OCPP -M07-B	AndroidUSB + COM +
	OCPP -M07-U	AndroidUSB + COM
	OCPP -M07-BB-AA	Android + IOSUSB + COM +7android +1





OCPP-M07





OCPP-M07






OCPP-M07





OCPP-M07

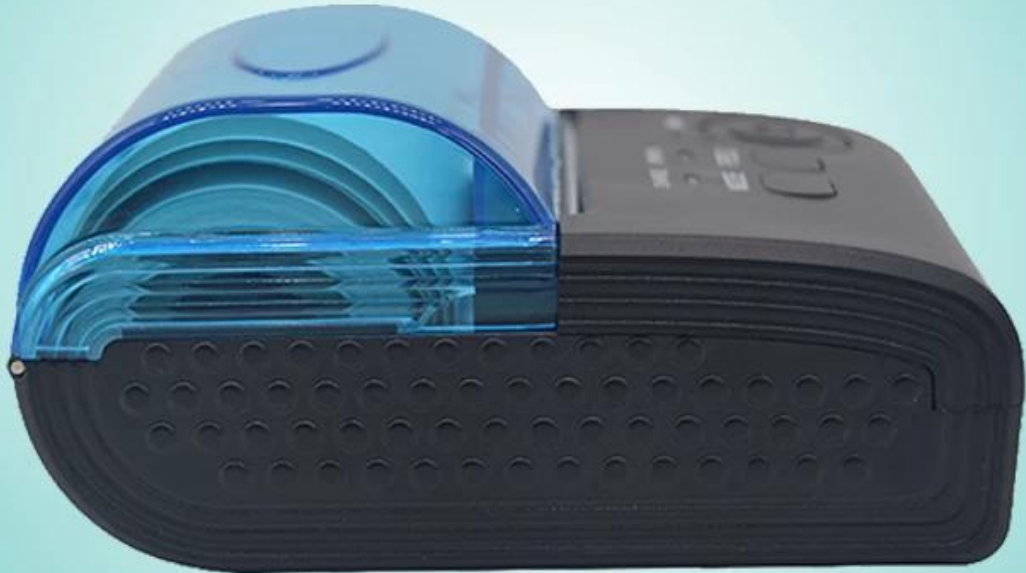

OCOM

OCOM POS ID 500 1

OCOM DOT POS POS ISO CE FCC BIS

2007 6 OCOM ISO9001 2008 159 / 2300 50 O2 Equicom ...

OCOM " " ...

□OEM / ODM□

□□□□□□□□

▶ Company



▶ Certificates



▶ Payment



□□□□□□□□

· POS □□□□□□□□□□□□□□□□□□□□

· □□□□□□ 500 □□□□□□□□

· 1 □□□□□□□□□□□□ 02 □Star ...

· □□ 163 □□□□ / □□□□ 2600 □□□□□□

· □□□□□□□□□□□□ 24 □□□□□□□□

· □□ 12 □OEM / ODM □□□□□□□□□□□□

· □□□□□□□□□□□□□□□□□□

· □□ ISO 9001 □FCC □CE □Rohs □Soncap □SASO □POA □BIS □□□□□□□□□□

· □□□□□□□□□□□□□□□□□□□□□□□□

· □□□□□□□□ 12 + 1 □□□□□□□□□□□□□□

· □□ “□□□□□□□□”

· □□□□ “□□□□□□□□□□□□□□□□□□□□□□□□” □□□□□□□□



