

2. ňches Průřez

M / N OCBP-006

000

1. 000000/0000
2. 00000000
3. 00000000
4. 00000000
5. 0000000000000000

000

00 00	00 0
000	203DPI
00 00	20-60mm
00 00	MAX 127mm; MIN 50.8mm
00	DRAM 4M 4M
00 0 00	0000
000000	0000
00	USB
000000	000000
00	CODE128 EAN128 ITF CODE39 CODE93 EAN13 EAN13 + 2 EAN13 + 5 EAN8 EAN8 + 2 EAN8 + 5 CODABAR POSTNET UPC-A UPCA + 2 UPCA + 5 UPC-E UPCE + 2 UPC-E + 5 CPOST MSI MSIC PLESSEY ITF14 EAN14 QR DM PDF417
0000	000008
00&00	0° 90° 270° 360° 000010; 0° 90° 270° 360°
00	00PCX BMP 00000000 FLASH DRAM
0000	0000000000
0000	200060
0 00	MAX 80
0 0 00	MIN 25
0 0000	00 0
0000	DC12V 3A
00	1.04KG
0000	190D x 135W x 137H mm
0000	0045°C 20 - 80 RH
00	- 40 55°C ≤ 93 RH 40°C
00	

000








www.ocominc.com

CE FC





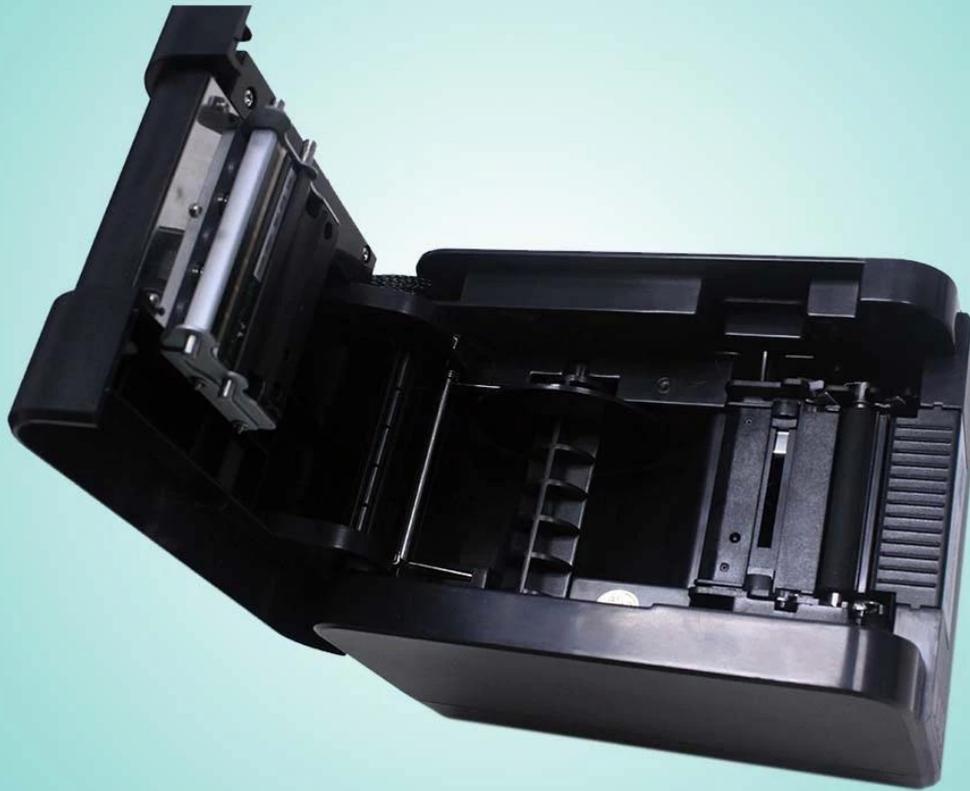

www.ocominc.com

CE FC



OCOM

500 100

12 + 1 24

30 DOA DOA

4.

T / T LC T / T Escrow Moneybookers Visa MasterCard Maestro Solo Carte Bleue PostePay CartaSi 4B Euro6000

5.

6.

Eruopean

133 1300 02 500 50

OCOM Technologies Ltd. TUV POS Auto-ID OCOM 500 1

OCOM POS POS POS POS CE FCC OCOM OEM / ODM

Harold Hu

OCOM

10 4 518054 www.ocominc.com www.possolution.com.cn; sales14@ocominc.com; Skype sales14@ocominc.com MSN ocomsales14@hotmail.com; Whatsapp 0086.18948789890; 0086.18948789890; 0086.18948789890; QQ 1467261417; 0086.755.86053207-814; 0086.755.86053207-868;