

OCBP-013

CPCL TSPL
/POS
160mm/s
TPH

□□□	
□□	OCBP-013
□□	□□□
□□	USB □□□□□ □□ □□□, □□ □□□□, □□ □□□ □□□□□
□□□□□	50□□
□□	□□□AC 100V-240V,50-60Hz,□□□DC 24V/2.5A
□□	□□11□□□□□
□□□□□	□□
□□□□	□□ 60dB□A □□ RMS□
□□□□□□□	Win9X/Win2000//Win2003/Win Vista/ Win 7/Window XP /win 8/win8.1/Win 10/IOS/Android
□□□□	CE ,FCC,Rohs,CCC □
□□□□	
□□□□	□□□□
□□□	8 □/□□ (203 DPI)
□□□□	200 mm /s
□□□□	□□ 80 □□
□□□□	□□□□Logo□□
□□□□	CPCL/TSPL/ESC/POS
□□□□□□□	
□□	□□□□□ UPC-A / UPC-E / JAN13 (EAN13) / JAN8 (EAN8) / CODE39 / ITF / CODABAR / CODE93 / CODE128 □□ □□□□□□, PDF417
□□	
□□□□□	□□□□□□□□□□□□□□
□□□□	□□□□□□□□□□□□□□
□□□□	83±0.5mm
□□□□	0.06 ~ 0.3mm
□□	


寸	160mm*110mm *93mm
寸	1.65kg
寸	
寸	0 ~ 45 10%~80%
寸	-20~60 10%~90%










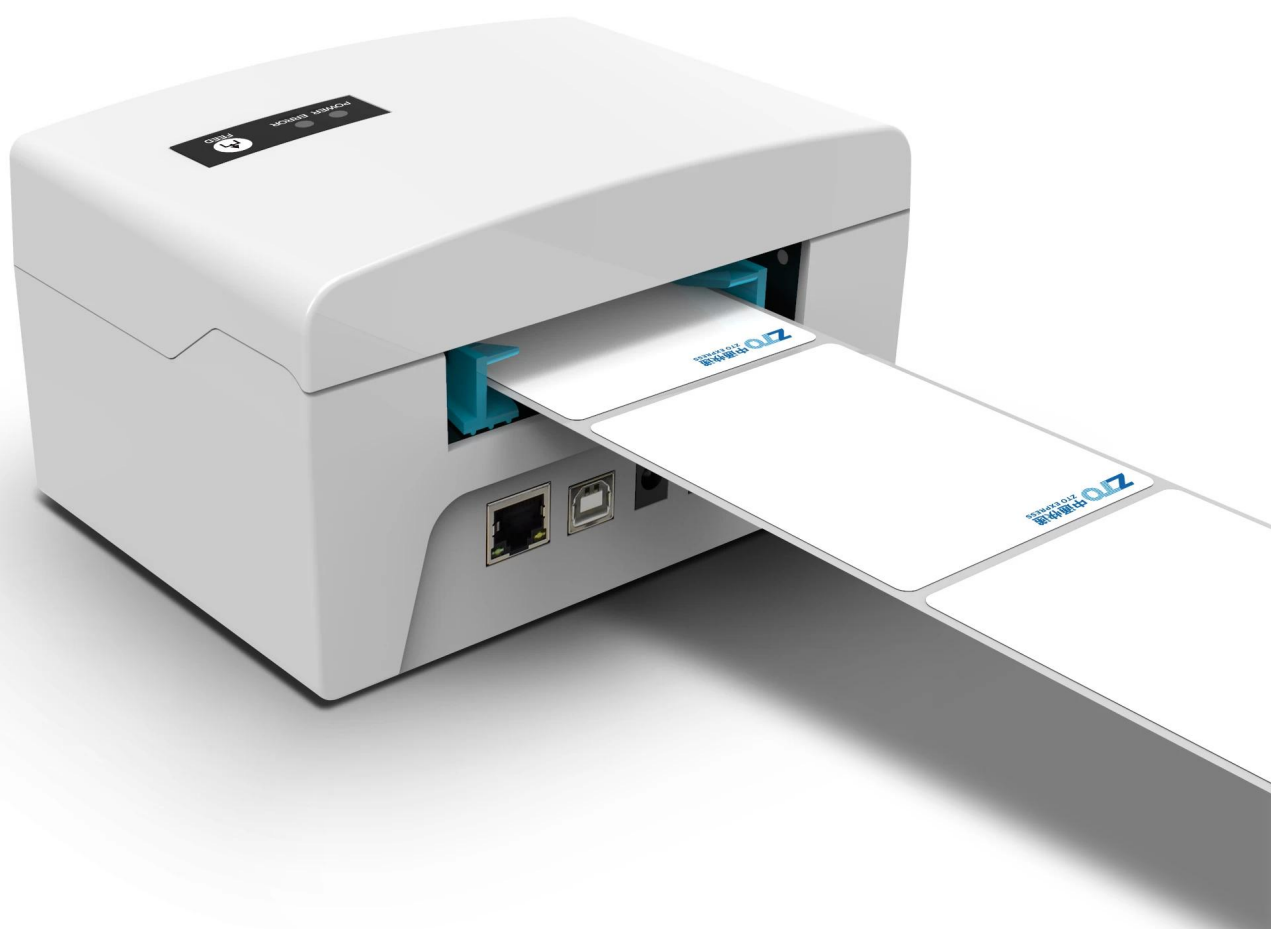





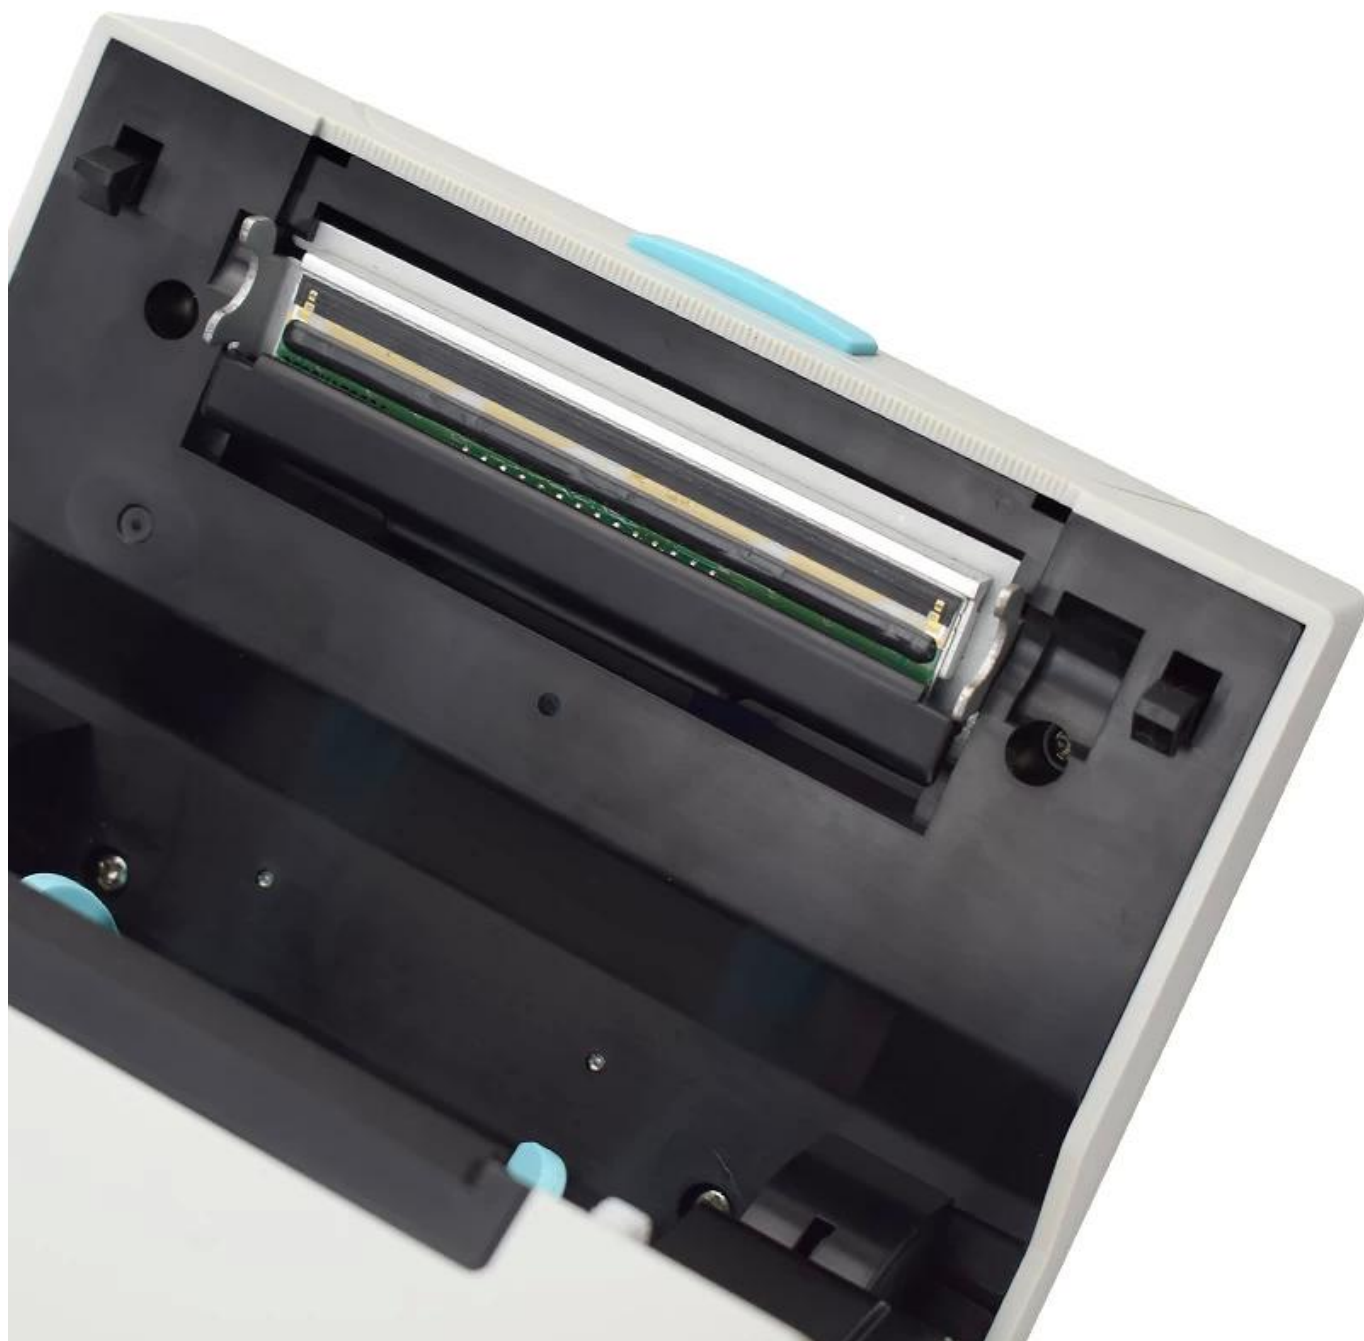



□□□□

□□□□_CD