



ROHM 50

IOS Android Harmony OS Windows MAC

	OCBP-402DT
	USB USB USB WIFI USBLAN
	32 CPU
	4MB 320KB
	50
	100V-240V 50-60Hz 24V/2.5A
	USB
	2
	2
	0° 90° 180° 270°
	TSPL
	203
	152
	30-108
	10-250
	39 93 128 UCC 128 A B C Coda bar Interleaved 2 of 5 EAN-8 EAN-13 T PDF417 Maxi Data Matrix QR
	8 Windows
	30-118
	0.06 0.22mm
	220*112*102
	1.02

□□□	248*140*170mm/1.87Kg
8□1□□	516*300*360mm/12.4kg
□□	
□□□□□□□	0□45°C□10%□80% □□□
□□□□□□□	-20□60□□□□10%~90%□□□

# THERMAL SHIPPING LABEL PRINTER

# OEM/ODM

## COMPLETE QUALIFICATION SUPPORT CUSTOMIZATION



# Thermal label printer

Works Perfectly for 4x6 Labels



**OCBP-402DT**

**Media type: Roll label/fanfold**

Printing width: 30-108mm

Printing speed: 50-152mm/s

## Both stacked and rolled labels can be printed



Print roll label



Print stacked labels

# Durable & Cost Saving

1. Thermal Label Printer applies newest direct thermal printing technology.
2. About 1 second to print one 4"x6" shipping label.
3. Save time and money in your shipping and storage.





# Multi-System Compatible

Label Printer can smoothly run on Windows XP, 7, 8,10, Mac OS.  
Please choose Bluetooth version and download Soonmark APP  
to print labels through your smart phones.



Windows 10



Windows 8



Windows 7



Windows XP



Mac OS



*(Note: NOT compatible with Chrome OS).*

# Multi-Size Compatible

*This printer provides adjustable paper guide rail  
for small companies, enable them to print various sizes of labels  
with width range from **20-118mm***




**Media width**

|—————| **118mm** |—————|



# Printer Internal Components

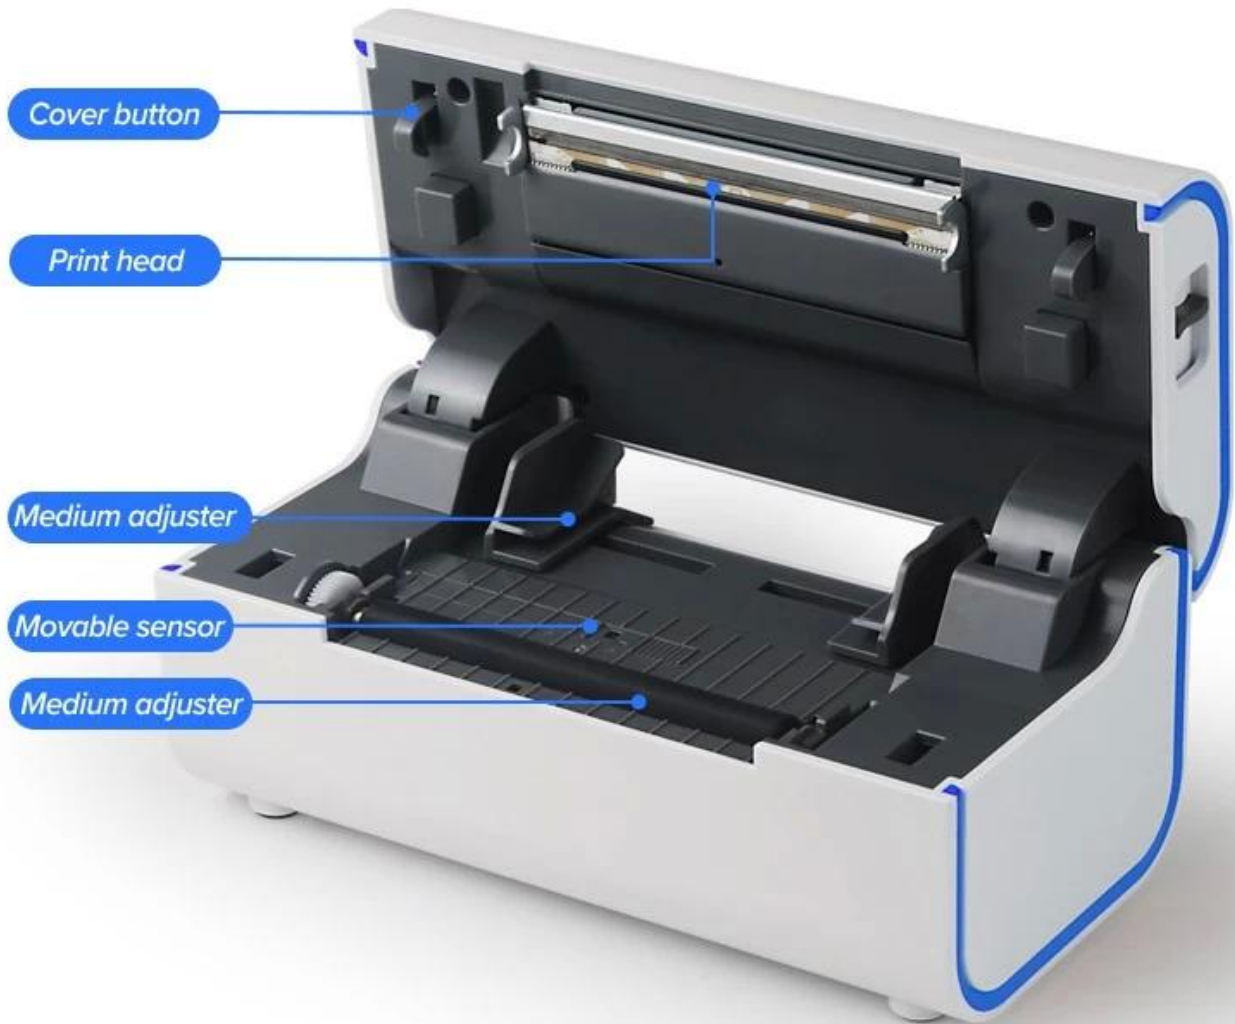

# OCBP-402DT TECH SPECS



**OS** Driver support  
Windows XP,7, 8,10,  
Mac OS

 **Printing Method**  
Direct Thermal

 **Resolution**  
203 dpi

 **CPU**  
32-bit RISC CPU

 **RAM**  
8MB

 **Flash**  
4MB

 **Printing Speed**  
50-152 mm/s

 **Printing Width**  
20-108mm

 **Printing Length**  
25-300mm

 **Media Type**  
Folded paper,  
roll paper,  
die-cut label,  
black mark paper

 **Media Width**  
20-118mm

 **Media Thickness**  
60µm-220µm

 **Interfaces**  
**Default**  
USB

 **Programming**  
**Language**  
TSPL

 **Control Panel**  
One Feed button  
(three colors for  
three different status)

 **Power Adapter**  
Input: AC 100-240V,  
1A,50-60Hz  
Output: DC 24V,2.5A,60W

 **Dimension (WHD)**  
220\*112\*102

 **Weight**  
1.17kg

# Packing List (default)









**P**  
SAMPLE LABEL  
6 LB PRIORITY MAIL RATE  
ZONE 4 NO SURCHARGE  
COMMERCIAL PLUS PRICING

062500095942  
768597  
FROM 9910

**PRIORITY MAIL 2-DAY™**  
99

John Smith  
1234 BARNES RD  
CARSON NV 30000

SHIP TO:  
DO NOT SHIP  
11 CAMPBELL AVE  
CAMPBELL CA 95009

USPS TRACKING #  
88888888888888888888888888888888











□□□□

[OCBP-402DT□□□□](#)

[OCBP-402DT□□□□□□-Android](#)

[OCBP-402DT□□□□□□-IOS](#)

[OCBP-402DT □□□□□□ - Mac OS](#)

[OCBP-402DT □□□□□□ - Windows](#)