


OCBS 2012
M / N

OCBS	
Resolution	640 * 480 @ 256
Light Source	LED 617 nm ± 10 nm
Throughput	0 ~ 100,000 / min
Field of View	360° ± 60° @ ± 65°
Scanning Speed	300 / min
Supported Codes	2D DataMatrix, Matrix 2 of 5, MaxiCode, MicroPDF417, MSI Code, PDF417, QR code, Standard 2 of 5, Telepen, TLC 39
	1D Posnet, BPO, Posnet, Codabar, Codablock, EAN11, EAN13, EAN128 / EAN128, Posnet, EAN.UCC Composite, Planet, Plessey Code, Posnet, RSS, UPC / EAN
Minimum Distance	≥ 500 μm
Field of View	360°
Field of View	65°
Field of View	75°
OCBS	
Interface	RS232 / USB / USB / COM
Voltage	5 V ± 5%
Current	190 mA
Power	1.5 W
Weight	1.65 kg
Dimensions	170 mm x 60 mm x 95 mm
OCBS	
Operating Temperature	-5°C ~ 65°C
Storage Temperature	-20°C ~ 70°C
Humidity	5% ~ 95%
Drop Height	1.5 m



OCBS-2012

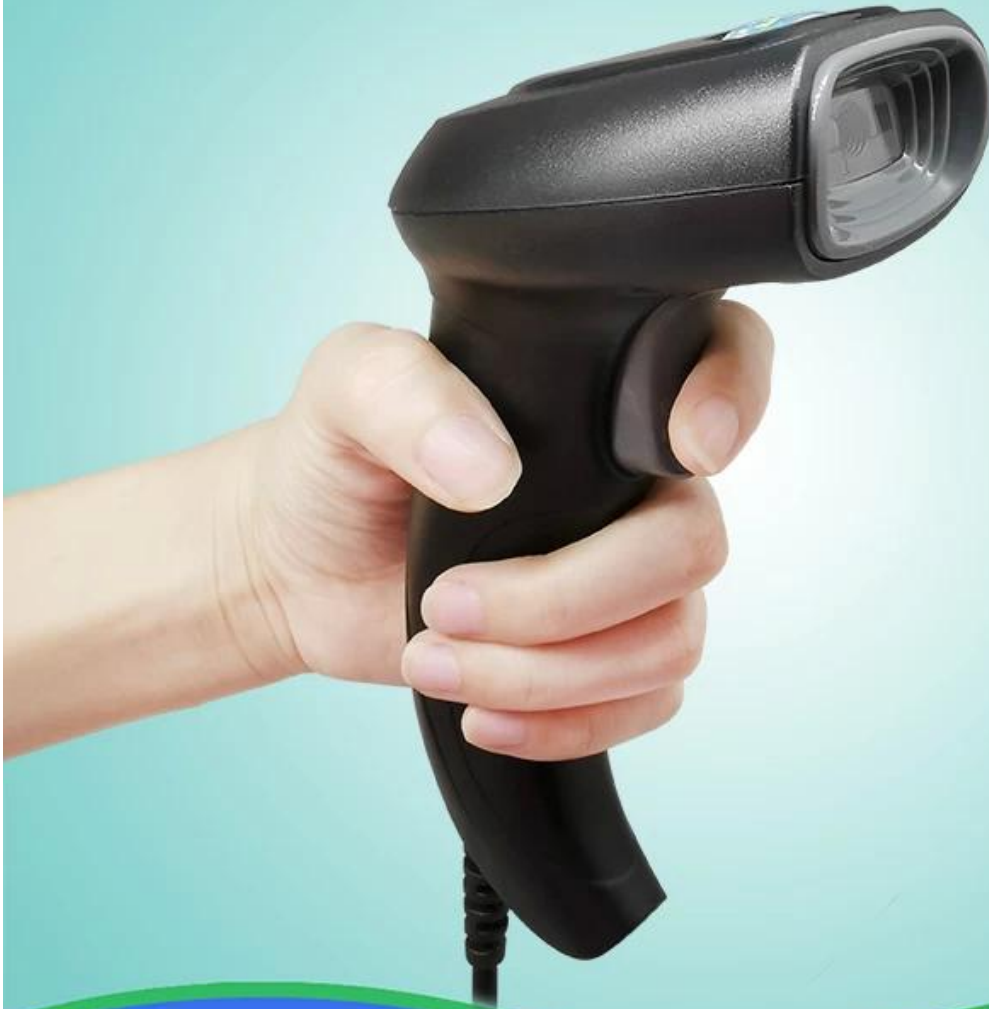



OCBS-2012





OCBS-2012





OCBS-2012

