

OCBS-W240

M/N OCBS-W240

OCBS



OCBS-W240 30

OCBS-W240 4mils

OCBS-W240 LED

OCBS-W240

□ □ □ □ □ □ □ □ □ □ □

11

項目	
規格	OCBS-W240
材質	ABS
接口	USB2.4G,USB2.4GBT
重量	1.5M
傳輸速率	≥60MB/s 2.4G 30Mbps
傳輸距離	2000m
數據容量	4Mb/s 15,000MB
電壓	2.5V(5V@1000mA)
電流	≥12mA
電阻	≥4Ω
光學	LED/紅光
功率	5W/1A
溫度	115mA/510mA
兼容性	Windows/Linux/Android/IOS/MacOS
尺寸	1.5m/4.0 1.5m/4.0
項目	
規格	CMOS 640*480
尺寸	30mm
厚度	≥3mil/0.076mm PCS90%, 39mm
重量	30mm~480mm
電壓	65V
電流	LED
電阻	LED
溫度	30mm~480mm
兼容性	Windows/Linux/Android/IOS/MacOS
尺寸	1.5m/4.0 1.5m/4.0
項目	
規格	CMOS 640*480
尺寸	30mm
厚度	≥3mil/0.076mm PCS90%, 39mm
重量	30mm~480mm
電壓	65V
電流	LED
電阻	LED
溫度	30mm~480mm
兼容性	Windows/Linux/Android/IOS/MacOS
尺寸	1.5m/4.0 1.5m/4.0
項目	
規格	CMOS 640*480
尺寸	30mm
厚度	≥3mil/0.076mm PCS90%, 39mm
重量	30mm~480mm
電壓	65V
電流	LED
電阻	LED
溫度	30mm~480mm
兼容性	Windows/Linux/Android/IOS/MacOS
尺寸	1.5m/4.0 1.5m/4.0
項目	
規格	CMOS 640*480
尺寸	30mm
厚度	≥3mil/0.076mm PCS90%, 39mm
重量	30mm~480mm
電壓	65V
電流	LED
電阻	LED
溫度	30mm~480mm
兼容性	Windows/Linux/Android/IOS/MacOS
尺寸	1.5m/4.0 1.5m/4.0
項目	
規格	CMOS 640*480
尺寸	30mm
厚度	≥3mil/0.076mm PCS90%, 39mm
重量	30mm~480mm
電壓	65V
電流	LED
電阻	LED
溫度	30mm~480mm
兼容性	Windows/Linux/Android/IOS/MacOS
尺寸	1.5m/4.0 1.5m/4.0
項目	
規格	CMOS 640*480
尺寸	30mm
厚度	≥3mil/0.076mm PCS90%, 39mm
重量	30mm~480mm
電壓	65V
電流	LED
電阻	LED
溫度	30mm~480mm
兼容性	Windows/Linux/Android/IOS/MacOS
尺寸	1.5m/4.0 1.5m/4.0
項目	
規格	CMOS 640*480
尺寸	30mm
厚度	≥3mil/0.076mm PCS90%, 39mm
重量	30mm~480mm
電壓	65V
電流	LED
電阻	LED
溫度	30mm~480mm
兼容性	Windows/Linux/Android/IOS/MacOS
尺寸	1.5m/4.0 1.5m/4.0
項目	
規格	CMOS 640*480
尺寸	30mm
厚度	≥3mil/0.076mm PCS90%, 39mm
重量	30mm~480mm
電壓	65V
電流	LED
電阻	LED
溫度	30mm~480mm
兼容性	Windows/Linux/Android/IOS/MacOS
尺寸	1.5m/4.0 1.5m/4.0
項目	
規格	CMOS 640*480
尺寸	30mm
厚度	≥3mil/0.076mm PCS90%, 39mm
重量	30mm~480mm
電壓	65V
電流	LED
電阻	LED
溫度	30mm~480mm
兼容性	Windows/Linux/Android/IOS/MacOS
尺寸	1.5m/4.0 1.5m/4.0
項目	
規格	CMOS 640*480
尺寸	30mm
厚度	≥3mil/0.076mm PCS90%, 39mm
重量	30mm~480mm
電壓	65V
電流	LED
電阻	LED
溫度	30mm~480mm
兼容性	Windows/Linux/Android/IOS/MacOS
尺寸	1.5m/4.0 1.5m/4.0
項目	
規格	CMOS 640*480
尺寸	30mm
厚度	≥3mil/0.076mm PCS90%, 39mm
重量	30mm~480mm
電壓	65V
電流	LED
電阻	LED
溫度	30mm~480mm
兼容性	Windows/Linux/Android/IOS/MacOS
尺寸	1.5m/4.0 1.5m/4.0
項目	
規格	CMOS 640*480
尺寸	30mm
厚度	≥3mil/0.076mm PCS90%, 39mm
重量	30mm~480mm
電壓	65V
電流	LED
電阻	LED
溫度	30mm~480mm
兼容性	Windows/Linux/Android/IOS/MacOS
尺寸	1.5m/4.0 1.5m/4.0
項目	
規格	CMOS 640*480
尺寸	30mm
厚度	≥3mil/0.076mm PCS90%, 39mm
重量	30mm~480mm
電壓	65V
電流	LED
電阻	LED
溫度	30mm~480mm
兼容性	Windows/Linux/Android/IOS/MacOS
尺寸	1.5m/4.0 1.5m/4.0
項目	
規格	CMOS 640*480
尺寸	30mm
厚度	≥3mil/0.076mm PCS90%, 39mm
重量	30mm~480mm
電壓	65V
電流	LED
電阻	LED
溫度	30mm~480mm
兼容性	Windows/Linux/Android/IOS/M

1D/2D Wireless Barcode Scanner

Model: OCBS-W240



Multisystem Compatibility

Compatible with Microsoft Android/iOS/MacOS/Windows/Linux



Android



IOS/MacOS



Windows



Linux

Support 1D&2D Code Scanning



Superior Decoding Capability

Support mainstream 2D/full 1D/screen bar codes



ABCDEFG
Code39



ABC-abc-1234
Code128



6 14141 00003 6
Codebar



6 091234 567890
EAN/JAN-13



0 12345 67890 5
UPC A



QR



PDF417



Data Matrix



Micro QR



AZTEC



Superior decoding capability



Three Trigger Mode



Manual



Continuous
Scanning



Auto-sensing

LED Display and Key

The large digital display enables you to read the battery level and easily adjust settings such as connectivity options, volume, and language.



Ultra Long Endurance

5V/2000mAh battery(Continuous Scan Time ≥ 12 hours)



Multifunctional Base

It has a multifunctional dock that can charge the scanner and transmit information




Shock Buffering

Designed to withstand 1.5m drops




Dimensions

Wireless Barcode Scanner

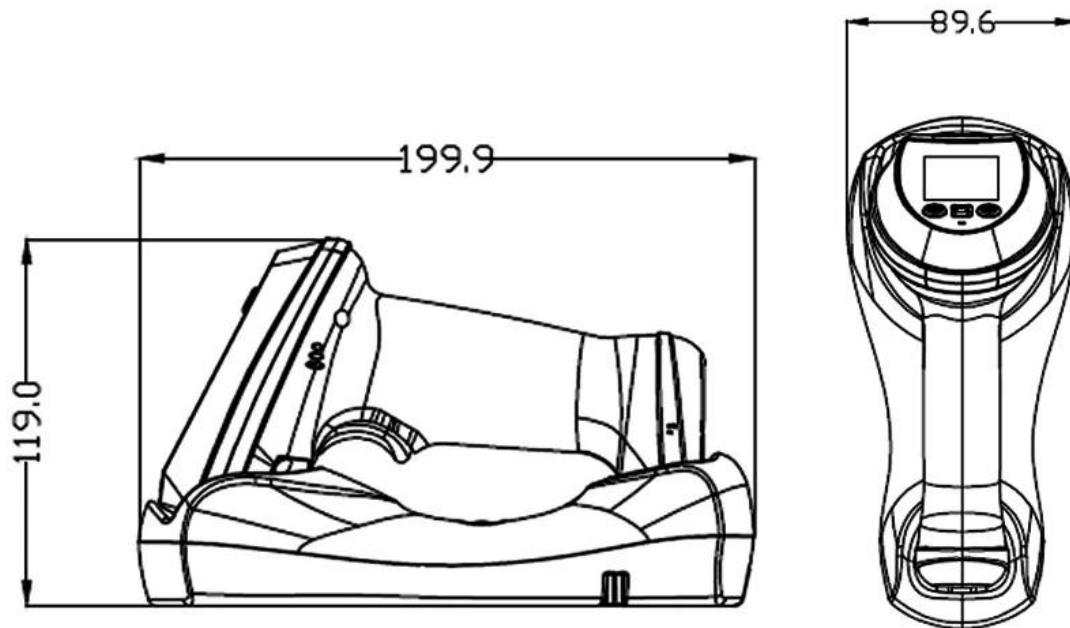

Packaging accessories

Beautiful packaging, original accessories

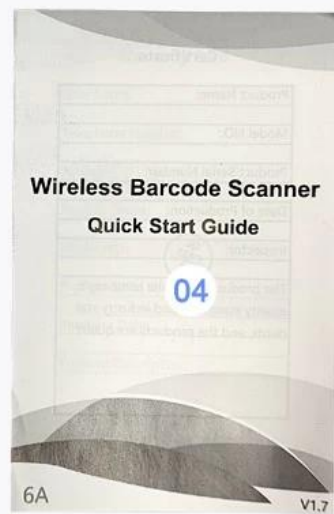

01 Barcode Scanner

02 Charging Base

03 USB Cable

04 User Manual

APPLICATION



Logistics



Warehouse Management



Clothes Store



Accessory Store



Bakery



Convenience Store



Library



Supermarket

“

16+ YEARS

OEM/ODM EXPERIENCES

4000+

CUSTOMERS OVER 165 COUNTRIES

15,000,000+

UNITS OF ACCUMULATED SALES

CERTIFICATES

BY ISO/CE/FCC/ROHS/BIS...

”

CERTIFICATE



















