

# 58

OCPP-586)

## 1. 1. 2. 3. 4. 5. 6.

1. 1. 2. 3. 4. 5. 6.
2. 1. 2. 3. 4. 5. 6.
3. 1. 2. 3. 4. 5. 6.
4. 1. 2. 3. 4. 5. 6.
5. 1. 2. 3. 4. 5. 6.
6. 1. 2. 3. 4. 5. 6.

## 2. 1. 2. 3. 4. 5. 6. 7. 8. 9. 10. 11. 12. 13. 14. 15. 16. 17. 18. 19. 20. 21. 22. 23. 24. 25. 26. 27. 28. 29. 30. 31. 32. 33. 34. 35. 36. 37. 38. 39. 40. 41. 42. 43. 44. 45. 46. 47. 48. 49. 50. 51. 52. 53. 54. 55. 56. 57. 58. 59. 60. 61. 62. 63. 64. 65. 66. 67. 68. 69. 70. 71. 72. 73. 74. 75. 76. 77. 78. 79. 80. 81. 82. 83. 84. 85. 86. 87. 88. 89. 90. 91. 92. 93. 94. 95. 96. 97. 98. 99. 100.

OCPP-586	OCPP-586
58mm	58mm
RS-232/USB	RS-232/USB
100V-240V,50-60Hz , 12V/ 3	100V-240V,50-60Hz , 12V/ 3
12V/1A	12V/1A
50KM	50KM
s	
Windows,Linux,IOS	Windows,Linux,IOS
CE,FCC,Rohs	CE,FCC,Rohs
203 DPI	203 DPI
90	90
48mm	48mm
POS	POS
13 ( EAN13 ) 8 ( EAN8 ) 39	13 ( EAN13 ) 8 ( EAN8 ) 39
384/ANK 12*24 1.5(W)*3.0(H) mm 24*24 3.0(W)*3.0(H)mm	384/ANK 12*24 1.5(W)*3.0(H) mm 24*24 3.0(W)*3.0(H)mm
PC437/PC850/PC860/PC863/PC865/ WPC1252/PC866/PC852 PC858/PT151,1251/PC747 WPC1257/PC864/WPC1255/	PC437/PC850/PC860/PC863/PC865/ WPC1252/PC866/PC852 PC858/PT151,1251/PC747 WPC1257/PC864/WPC1255/
57.5±0.5mm	57.5±0.5mm
50mm	50mm
0.06-0.08mm	0.06-0.08mm
190*132*119 mm	190*132*119 mm
1.2	1.2
210*210*150	210*210*150
121	630*430*320mm/15kg

□□	
□□□ □□ □ □□	0 □ 4 5 □□□ , 10%~80% □□□
□□ □□ □ □□	-20 □ 60 □□□ , 10%~90% □□□







**Thermal Receipt Printer**  
Model: OCPP-586      Printer Speed: 90mm/s  
Interface: USB      Paper Width: 58mm  
Power Input: DC12V/3A  
Cash Drawer: DC12V/1A  
Execution Standard:  
GB4943, GB9254, GB17625.1



13071051







**ocom**  
*At your side*

POWER

MODE


FEED









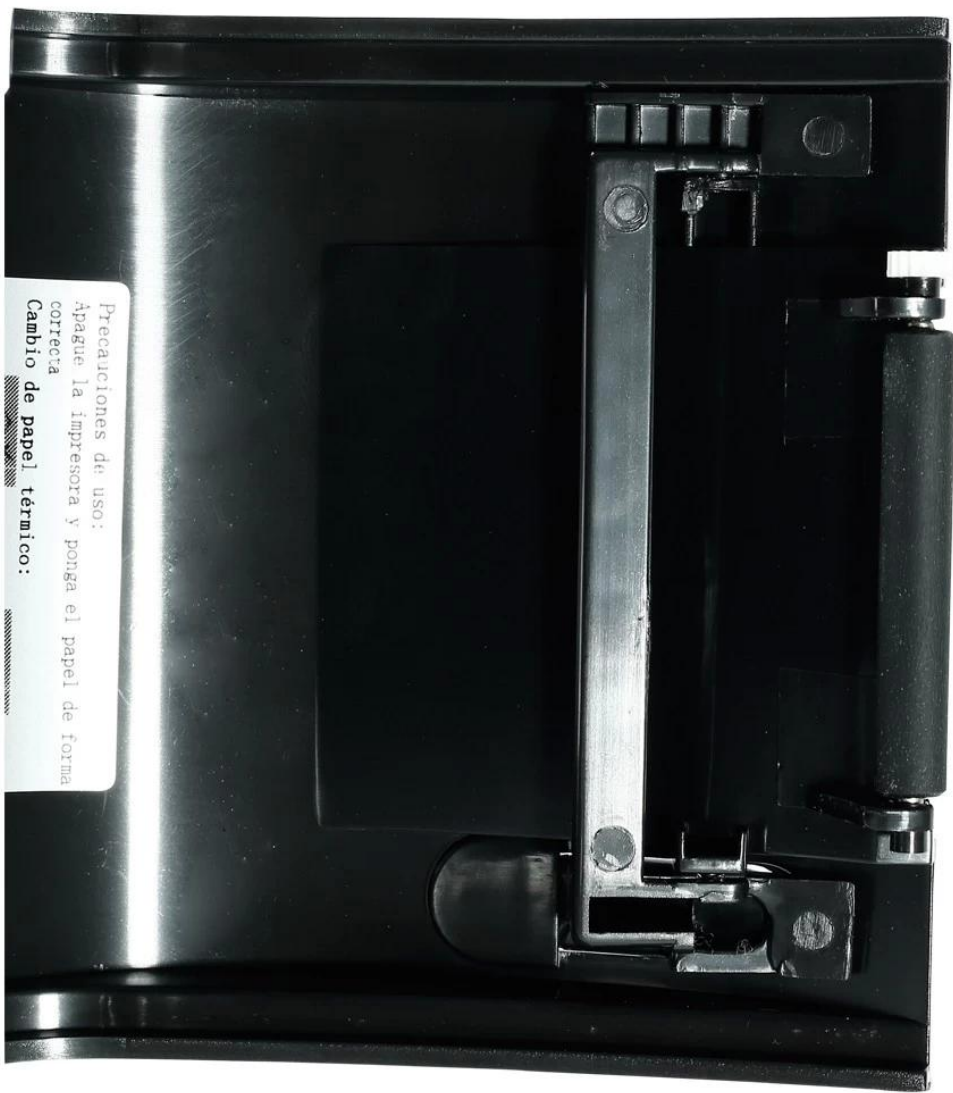

Precauciones de uso:  
Apague la impresora y ponga el papel de forma  
correcta

Cambio de papel térmico:







