

- 1.00000000
- 3.100M
- 5.____OPOS____ ___

2.[[[[[[

	200/_
	79.5±0.5□□
	Ф80mm
	0.06-0.08mm
	576[]/ line512[]/[]
	3.750000000000
	USB+25P□□/ 36P□□□□/ LAN
	100□□
	2048Kbytes
NV Flash□	256K□□
	AC110V / 240V□50□60HZ
	DC 24V / 2.5A
	DC 24V / 1A
	00045000100800000N-000
	000-450 000 00010-800N-00
	ANK[FontA 1.5 * 3.0mm / FontB 1.1 *2.1
	UPC-A / UPC-E / JA EAN13 JAN8 EAN8 / CODE39 / ITF
	/ CODE93 / CODE128/\[\] \[\] PDF417\[\] \[\] \[\]
	PC347PC850PC860PC863
	PC858[]Iran [PT151[]1251[]

3.Pictures□



80mm Thermal Printer with Auto Cutter

OCPP-80E













Product Picture



Reliable with good price



Supports black mark detection and order reminding function, compatible with OPOS driver;







100M Ethernet port, ultra high speed data transmission;



Supports 256KB NV Logo storage and 2M big buffer memory;



Desktop or wall-mounted type for option;







Restaurant



Supermarket



Pharmacy



Warehouse



Clothing store



Bookstore

Parameter


Printing method:	Direct thermal		
Printing speed:	230mm/s 260mm/s		
Roll width:	79.5±0.5mm		
Print diameter:	Ф80mm		
Paper thickness:	0.06-0.08mm		
Column capacity:	576dots/line , 512dots/line		
Line's pacing :	3.75mm (Adjustable by commands)		
Print command:	Compatible with the ESC/POS command		
Interface type:	Serial+USB+Lan/36P parallel port/25P serial +USB/LAN		
cutters life:	1million cuts		
Print head life:	100 km		
Input buffer :	2048Kbytes		
NV Flash:	256Kbytes		
Power adaptor:	AC110V/240V、50~60Hz		
Power supply:	DC 24V/2.5A		
Cash drawer supply:	DC 24V/1A		
Work environment:	Temperature(0 ~ 45) humidity(10 ~ 80%) (Non- condense)		
Work environment:	Temperature(0-45) degree centigrade, humidity(10-80%) Non- condense		
Storage environment:	Temperature(-10 ~ 60°C); Humidity(10 ~ 90%)		
Character size:	ANK, FontA:1.5*3.0mm/ FontB: 1.1*2.1mm		
Barcode:	UPC-A/UPC-E/JA (EAN13) /JAN8 (EAN8/CODE39/ITF /CODE93/CODE128 QRCode		
Characters:	PC347 (Standard Europe)、Katakana、PC850 (Multilingual)、PC860 (Portuguese)、PC863 (Canadian-French)、PC865 (Nordic)、West Europe、Greek、Hebrew、East Europe、Iran、WPC1252、PC866 (Cyrillic#2)、PC852 (Latin2)、PC858、IranII、Latvian、Arabic、PT151 (1251)		
Physical characteristics:	Weight: 1.25Kg; Appearance size: 190×145×143mm (length * width * height)		





Setting the Printing Mode(DIP switches):

The DIP switches are used to set the printer to perform various functions, such as cutter mode, character set, speed, beeper, print density and etc.





Clean of printer:


When the printer has the following conditions should clean the print head:

- The printer does not clear
- The page frame lengthways of printer has some not clean
- Paper feed with a large noise

Printer cleaning steps as follows:

- Shut off the power of printer, Open the Top Cover; If there is paper, please wipe off the paper;
- If it just finished a printing, please wait for a while until the print head cooling;
- With a soft cotton cloth dipped in ethanol (to be wrung) erase the thermal printer head thermal surface dust, stains;
- As the anhydrous ethanol evaporate completely, closed the top cover, and restart to print.

Production Process

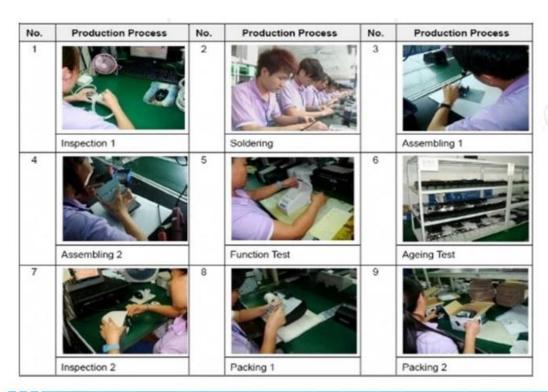

Quality Assurance:



OCOM is dedicated to providing most cost-effective products and services with highest quality that will meet customers' satisfaction.

Since the establishment, OCOM has been sticking strictly to the standard and requirements of ISO9001: 2000 in the processes of research, design, manufacturing and services. OCOM's products have passed CE, FCC, TUV, RoHs and

other certifications. We make strictly IQC, IPQC and OQC inspection per

industrial standard. All the products must pass 24-48 hours aging test before shipment. Some designated models can have as long as 24 months warranty.

Test Equipments:

		Indicates information has been verified onsite by a certification specialis	
Test Equipr	nent and Facilities		
Verified	Machine Name	Brand & Model No.	Quantity
1	Ageing Tester	No Information	6
V	Withstand Voltage Tester	CC2670A	1
V	Oscilloscope	TBS1102	1
1	DC Power Supply	PS-305DM	6
V	Digital Torque Meter	HP100	1
1	Calliper	GUANGLU	2
1	Multi-meter	VC890D	7
1	Test Computer	No Information	13

Verified by TUV on 2013.7.15

Certification:










Warranty and After Sales:



- Spare parts will be provided for mass orders for customers' local maintenance.
- Any product found to be defective within 30 days of shipment shall be deemed Dead on Arrival (DOA). DOA products will be advance replaced and shipped via express.
- Have distributors or authorized agents in the main market who can provide local repair and replacement services.
- Professional CRM management insures fast respond for customer's enquiries and orders tracking.
- » Sales with many years experience in foreign trade, proficient in foreign languages and strong sense of responsibility.
- > 7*24 hours online, responds with 12 hours in working days, and within 24 hours for rest days.

Packing and Shipment:











Payment:









secure payment







Customers Reference

Over the years, OCOM keep efforts on marking "OCOM" as an internationally recognized brand, and we have established goods relationship with our customers and have friendly communication with each other.



Company Profile





OCOM Technologies Limited is a professional supplier specialized in POS and Auto-ID applications. Our products portfolio covers, Thermal Printer, Barcode printer, Dot Matrix Printer, Barcode Scanner, Magnetic Card Reader, Data Collector, POS Terminal, and other IOT products.



We have FCC, CE, RoHS, and other certifications. We have sell our products to West Europe, North American, Africa, Asia-Pacific and other countries.

OCOM has professional teams including marketing, R&D, quality control, production and sales service. All of the sales representatives have 3 to 10 years experience in international trading, which help us to meet the customers' needs.

OCOM have been sticking to the quality system of ISO9001:2008. We conduct strict IQC, IPQC and OQC inspection in every industrial procedure. Based on our strong capacity, the normal lead time for main products is about 3 to 7 days even for bulk order.

You can find more information of us at: www.ocominc.com, Together we quest for the best.













Why you choose us?



Contact us

Any queries, please contact us immediately, big supprise is waiting for you.

Sales Center:

Address: Unit701, Block 14, Zhongxing Industrial Park, Chuangye Road, Nanshan

District, Shenzhen 518054, China

Website: www.ocominc.com www.possolution.com.cn; E-mail: ocom@ocominc.com, info@possolution.com.cn;

Tel: +86.755.86053207 ext 800; Fax: +86.755.86053207 ext 868; QQ: 2485890637, 190852203; Wechat: szocominc, hj34924238; Whatsapp: 008613352932860;



4.FAQ□

1□.Warranty

200000

 $= \frac{1}{2} \left(\frac{1}{2} \left(\frac{1}{2} \right) \right) + \frac{1}{2} \left(\frac{1}{2} \left(\frac{1}{2} \left(\frac{1}{2} \right) \right) + \frac{1}{2} \left(\frac{1}{2} \left(\frac{1}{2} \right) \right) + \frac{1}{2} \left(\frac{1}{$

lem:lem:lem:lem:lem:lem:lem:lem:lem:lem:
3[].Shipment
$ \begin{array}{cccccccccccccccccccccccccccccccccccc$
5 _1
$\label{local-com} $$ $$ $$ = \frac{1}{2} \frac{1}{2}$
$ \begin{cal} $
OCOM Technologies Ltd. TUV POS Auto-ID OCOM OCOM DOS D
OCOMOCOMPOSPOSPOSPOSPOSPOSPOSPOS
OCOMOEM / ODM
6.Contacts[
OCOM