11.6□□Windows□□□POS□□□□□□□□□□□□□□□□□□RFID□MSR

□□□□POS-M1106-W□

□□□□□□□□□□□□□□□□□□

□□□

Windows 7 Beta□□□

J1900□□ 1.99GHz□□□□

4G RAM□ 64G SSD;

11.6 □□□□□□□

□□1366 * 768□□□□□□□□□1080P;

□□□□58 / 80mm□□□□□□

□□□□□5200 mAh□□□□□□

□□□ VFD LCD□□□MSR□RFID□1 / 2D□□□□□□

□□□□

□□□□□□□□□□□□□□□□□□□□□□□□□□□□□

□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□

□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□

□□□□□□□□□□□□□□□□□□□ □ □□

□□

□□□	J1900□□ 1.99GHz□□□
□□□□	Win 7 Beta□□□□□Win 10 Beta
□□	4G □□+ 64G □□□□
□□	1□1.6 □□NCH □□□□
□□□	1□366 * 768□□□□□□1920 * 1080P□
□□□	□-□□□□□□
□□□	58mm□□□□□□□80mm□□□□□□□□□□□□□
□□□□□	ISO7811 1/2/3□□□□□□□□□□□□□□□
RFID□□□	ISO14443TypeA□ □□□□□
□□□□□□	1D / 2D□□□□ □□□□□
□□□□	LCD / VFD□□□□□□
□□□□	802.11b / g / n
USB	5* USB2.0□
RJ11	2 * RJ11
□□□	1□RJ45□□□100/1000□□□
RS232	1□* RS232□□□□tp□3 RS232 prot□
□□	□□□12V□5A
□□	5200□□ □□□□□□□□□□□□□□□
□□□□	□□□□□-1□0 ℃ □ 50 ℃ □□□□□ -20 ℃ □ 60 ℃ □□□□□10□□90□

Model: POS-M1106-A/W

Desktop POS Terminal

OCOM POS-M1106

Printing | Scanning | NFC

Display | Card Reader | Battery

Android 7.1 operating system;
RK3368 Octa-core 1.5GHz processor;
2G RAM and 8G eMMC;
11.6 Inch High-definition color screen;
Standard 1366*768 resolution, can up to 1080P;
Support 58/80mm thermal printer built in;
5200mAh Battery for option;
VFD LCD display MSR, RFID and 1/2D Barcode Scanner for option.

OCOM POS-M1106

This tablet pos terminal is elegant design and small size ideal for shop, restaurant and lottery. It can do rechargeable battery for outdoor or non-stable electricity conditions.

OS
Android 7.1
Windows

CPU
RK3368 Octa-core
1.5GHz

Memory
2G RAM+ 8G ROM

Button
Power Button
(Lock Screen Button)

Adapter
DC12V, 5A

Wi-Fi
2.4G
802.11b/g/n

Bluetooth
Support BLE
Support Bluetooth 2.1/3.0/4.0

Size
303*320*98mm

Port
1*Power port
1*Micro USB debug port
5*USB2.0
2*RJ11
1*RJ45
1*RS232
(can tp to 3 RS232 prots)

Printing
High Speed Thermal Printing
Paper With: 58mm(no cutter)
Printing Speed: 70mm/s
Paper Roll Diameter: 60mm
OR
Paper With: 80mm(auto cutter)
Printing Speed: 160mm/s
Paper Roll Diameter: 60mm

Micro SD(TF)
Support, Up to 32GB

Environment
Working temperature:
-10 ℃ ~ 50 ℃
Storage temperature:
-20 ℃ ~ 60 ℃

Display
11.6 Inch Touch Screen
Resolution: 1366*768P
(can up to 1920*1080P)

Optional

Scanning | NFC | Display | Battery | Card Reader

Note:
1. Real memory will be reduced due to a number of factors, and there are differences. Operating system also occupy part of memory.
2.Actual product specifications when sold take precedence over what may be listed at this catalogue; Product specifications are subject to change without prior notice.

Aocom®

At your side

POS-M1106-W

ISO FC CE RoHS

Aocom®
At your side

POS-M1106-W

ISO FC CE RoHS

Aocom®
At your side

POS-M1106-W

ISO FC CE RoHS

Aocom®
At your side

POS-M1106-W

ISO FC CE RoHS

Aocom®
At your side

POS-M1106-W

ISO FC CE RoHS

Aocom®
At your side

POS-M1106-W

ISO FC CE RoHS

Ocom®
At your side

POS-M1106-W

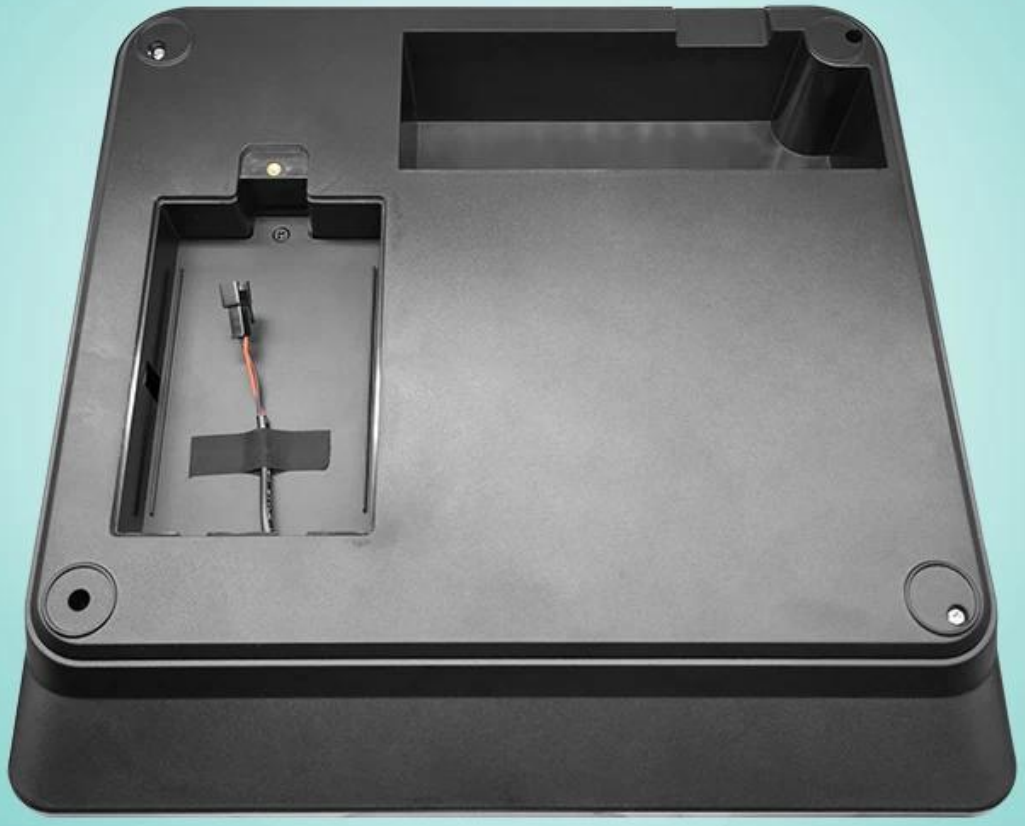

ISO FC CE RoHS

□□□□□

POS -M1106 □□

POS-M1106 SDK