

POS

M / N OCBP -008

200mm / s8" / s

300m 214mm 8.4" OD

8MB 8MB SRAM

TSPL / EPL / ZPL / DPL

USB2.0

Bartender & Windows

	8 / mm 203 dpi
	200 8 /
	104 4.09
	1778 70
	25.4-115mm
	USB 2.0 / TF;
	RS-232 / / WIFI /
	10 1178
	8 / mm 203dpi
	/
	200 8 /
	104 4.09
	1778 70
	25.4~115
	0.06 0.25
	10~1778mm
	127 5
	ABS
	246 223 204
	2.47
	32 RISC CPU
	8MB 8MB SDRAM Mro SD 4 GB

□□	□□□USB 2.0 / TF□; □□□RS-232 / □□□/ WIFI / □□
□□	1D□□□Code 39□Code 93□Code 128UCC□Code 128□□A□B□C□ Codabar□Interleaved 2 of 5□EAN-8□EAN-13□EAN-128□UPC-A□UPC-E□EAN□ UPC 2□5□□□□□MSI□PLESSEY□POS TNET□□□POS T□GS1 DataBar□Code 11 2D□□□PDF-417□Maxicode□DataMatrix□QR□□Aztec
□□□□	①RS-232□2400-115200 bps□②□□③WiFi④□□□□ ⑤□□□⑥LCD/ LED□□□□□□□□
□□□□	FCC□CE□CB□CCC
□□□□	□□□□-10~50°C□14~122°F□□10~90□□□□ □□□□-40~60°C□-40~140°F□□10~90□□□□





OCBP-008






OCBP-008






OCBP-008

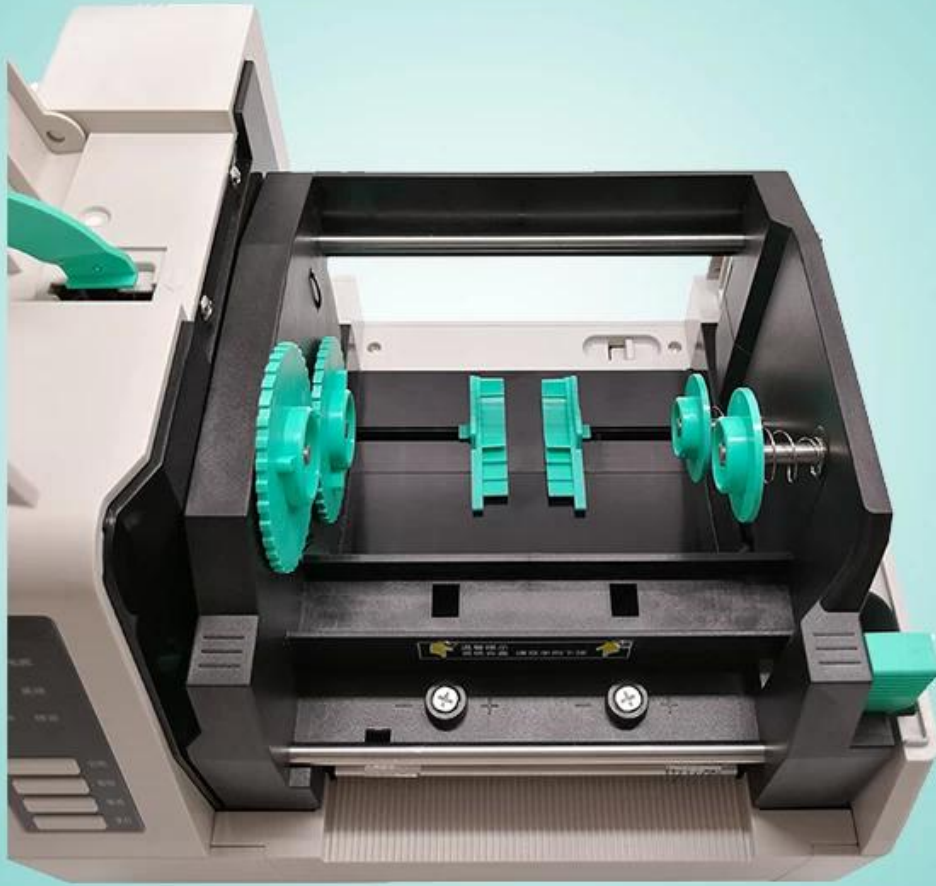



OCBP-008

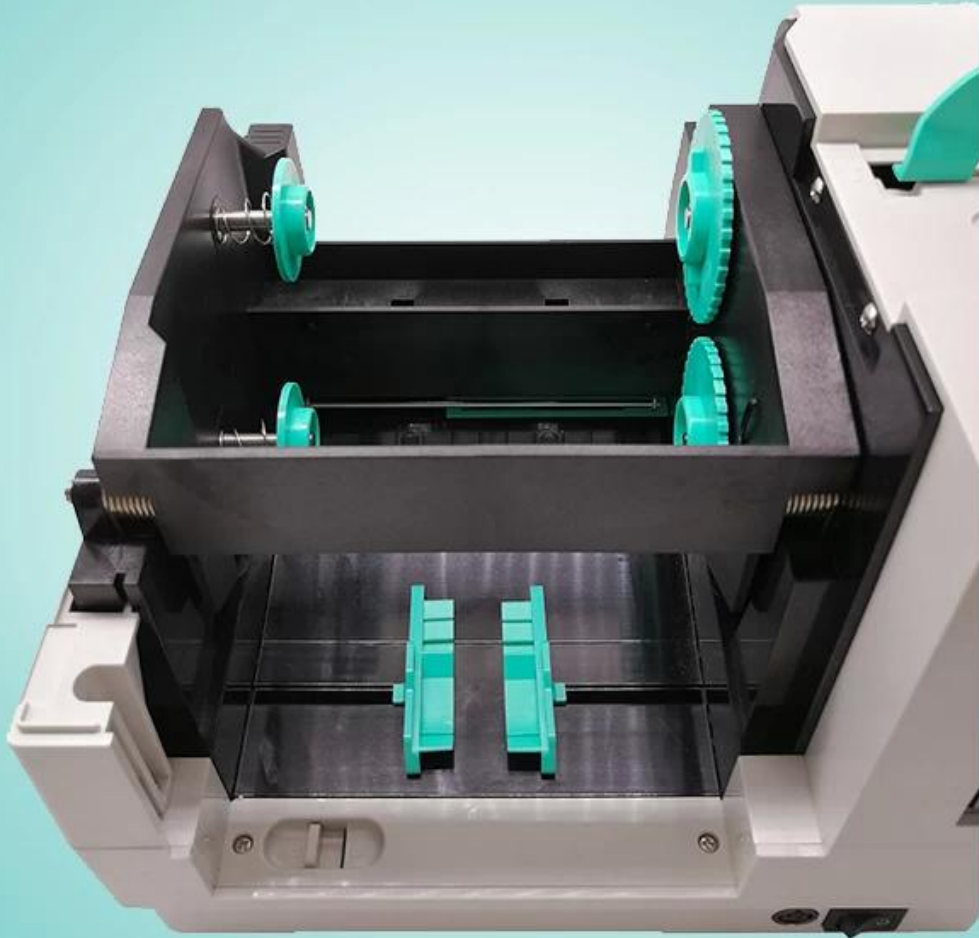



OCBP-008





OCBP-008





OCBP-008

