15.6 □□□□□□□ Pos □

(M/N:POS-G156W/A-G151W/A)

OCOM G□□pos□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□IO□□□□□□.

□□□

□□□□□□ □□□□□ I3 I5 □□□□□□

□□□□RK3288□□□□

EMMC 8GB/16GB/32GB □□

□□□□□Msata SSD 64GB□SSD 128GB □ 256GB □□

□□ 58mm □ 80mm □□□□□□□□□□

□□□□□□□□□

□□□ MSR □ VFD220 □□□□

□□□□□□□□□□

□□

□□	POS-G156W/A	POS-G151W/A
□□	15.6□□□□□□□POS□□	15.1□□□□□□□POS□□
□□	□□□□□□	
□□	□□□□□□□□□□□□□□	
□□		
□□□	15.6□□□□□□	15.1□□□□□□
□□□	1366*768	1024*768
□□	250cd/m^2	
□□	□□□160□□□□150	
□□□	□□□GG□□□	
□□	15.6□□□□13.3□□□□□□□□□□□□□□1366*768□□	151□□□□□□□□□□□□□□□□□1024*768
□□	2*20 VFD □□□□□□□	
□□		

Windows J1900	□□	Intel Celeron Bay Trail J1900 2.0GHz □ Intel core I3 / I5 4th □ □□□□ CPU
	□□□□	1*SO-DIMM DDRIII□□□□□1333*/1600 4GB□□□□2GB/8GB□□
	□□□□	Msata SSD 64GB □□□□□□ 256GB
	□□	□□Real Tek ALC662□□□□
	□□□	10/100Mbs,Realtek RTL8111F □□□□□ □□Mini PCI-E□□□□□□□□WIFI□□
	□□□□	Windows7/8/10□□□□□WEPOS,Linux
□□RK3288	□□	□□□RK3288□□□□□1.8G□RK3399□□
	□□□□	□□ DDRIII 2GB□4GB □□
	□□□□	□□ 16GB EMMC□32GB □□
	□□	□□Real Tek ALC5640□□□□
	□□□	10/100Mbs,Realtek RTL8111F □□□□□
	WIFI&BT□□	□□Wi-Fi 802.11b/g/n□□□BT3.0/BT4.0
	□□□□	□□7.1□□□□□8.1
□□□		
Windows □ Android(J1900&RK3288)		□□□*1
		12V DC □□□□*1
		□□□RS232□* 1
		□□□□RJ-45*1
		USB *5
		□□□ □*1 , □□□□*1
Windows□J1900□		LPT *1
		VGA(15Pin D-sub)*1
		□□□RJ11 *1 □□□□
		PS/2 *1 □□□□□□□
□□ (RK3288)		□□ RJ11 □□□□ *1 ,RJ11 □□□□□ □□□□□□ *1□□□□
		TF□□*1
□□		
80mm□□□□□		□□□□□□
		150mm/s □□□□
		79.5-/ 0.5mm □□□□□□□□□□□ 72mm
		□□□□□□□□□□□100km
		USB□□
58mm□□□□□		□□□□□□
		80mm/s □□□□
		57.5-/ 0.5mm □□□□□□□□□ 48mm
		□□□□□ 50km
		LPT □□
MSR		□□□□ MSR □□□□ 15.6 □□
□□□□□		□□□□□□□□□□□□□□□□□□□
□□□		□□ 8Ohm/5W □□□□□□□
□□		
□□		15.6□□□□6.5Kg□□□8.5Kg
□□□□□□□		300*465*500mm

□□	
□□□□	0□40□□□
□□□□	-10□60□□□
□□□□	10%~80%
□□□□	10%~90%
□□	
□□□□□	110-240V/50-60HZ □□□□ □□□DC12/5A □□□□□□□□ W/o □□□□ W/ 58mm □□□ DC12V/7A □□□□ W/80mm □□□□□□□□
□□□	□□□□□□□□□/□□/□□□□□□□
□□	□□□□□□□□□□□
□□	
□□	FCC A □/CE □□/LVD/CCC

All In One
Touch Screen POS System

SUPPORT SYSTEMS

Windows Embedded Partner

WINDOWS

ANDROID

LINUX

Accessories

Thermal Printer

Barcode Scanner

Cash Drawer

Card Reader

Product
Accessories

Product Display

The whole machine featured anti-static portection, stronger EMI anti-interference, anti-ESD up to 8KV

15.6 or 15.1 inch zero-bezel touch screen for optional

Multi-point projected capacitive touch panel

Built-in 58mm or 80mm thermal printer for optional

Ture flat and water-proof scratch-resistant surface display

Screen Size

15.6 inch

or

15.6 inch

+

15.6 inch

13.3 inch

2*20 VFD

15.1 inch

or

15.1 inch

+

15.1 inch

2*20 VFD

Product Interface

Windows interfaces J1900

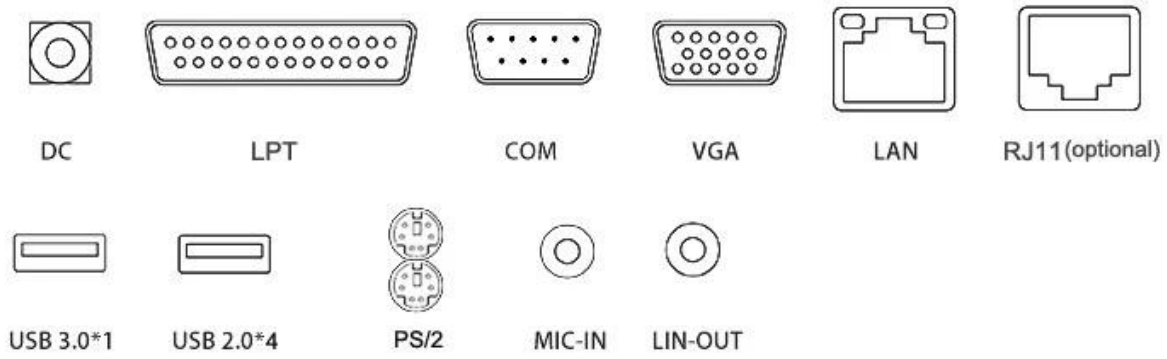

Windows interfaces i3/ i5

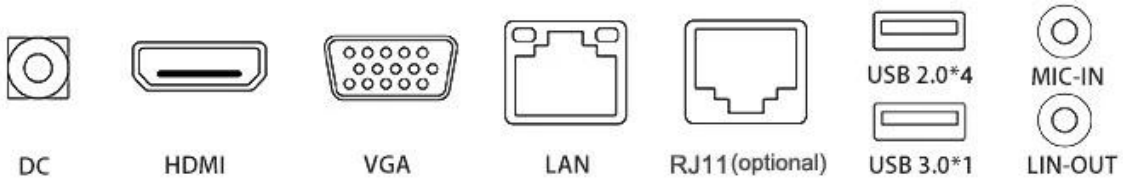

Android interfaces RK3288

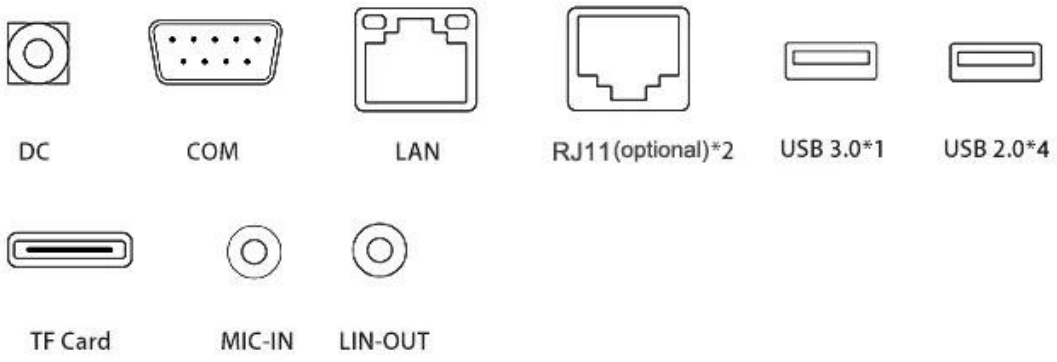

Product Color

Product Details

□□□□□

OCOM □□□□□□□ POS □□□□□□□□500□□□□□□Auto-ID□□□□□□□□□□□□□□□□□□□□□

OCOM"□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□ POS □□□□□ POS □□□□□□□□□□□□□□□□□□□□□□ □□□□□□□□□□□□□□□ ISO□ CE□FCC□ BIS □□□□□□□□□

□2007□6□□□□□□ OCOM □□□□ISO9001□2008□□□□□□□□□□□□□□□□□□□□□□□□□□□□□ 159 □□□/□□□

2300 □□□□□□□□□ 50 □□
□□O2□Equicom...

OCOM“□□□□□□□□□□□□□□□□□□□□□□□□□□□“□□□□□□□□□□□□”□□□□□□□□□□□□□□□□□□□
□□□OEM/□□ ODM□

□□□□□□□□

Certifications

□□□□□□□□□

· □□□□□□□□□ POS □□□□□□□□□□□□□

· □□□□500□□□□□□□

· □□□□□□□□□□□□O2□□...

· 2600□□□□163□□□□

· □□□□□□□□□24□□□□□□□□□

· □□□□□□□□15□OEM/ODM□□□

· □□□□□□□□□□□□□□□

· □□□□□□□ ISO 9001□FCC□CE□Rohs□Soncap□SASO□POA□BIS □□□

· □□□□□□□□□□□□□□□□□□□□□□□□□□□□

· 121□□□□□□□□□□□□□□□□□□□

· □□“□□□□□□□”

· □□□“□□□□□□□□□□□□□□□”□□□□□□

[illegible]

1. [illegible]

[illegible]
[illegible]

2. [illegible]

[illegible]
[illegible]
[illegible] t/t[illegible] paypal.

3. [illegible]

OCOM [illegible]
[illegible] 500 [illegible] 1 [illegible]100% [illegible]
[illegible] 121 [illegible] 24 [illegible]
[illegible]30[illegible]DOA[illegible] DOA[illegible]
[illegible]

4. [illegible]

[illegible] T/T[illegible]LC[illegible]Western Union[illegible]Escrow [illegible]

[illegible]

5. [illegible]

[illegible]

[illegible]