

Win8 2  
OCPP-582

□□□□

□□□□	□□
□□□□	□□A□33□35; □□B□40□42
□□□□	□□A□12×24; □□B□9×17; □□□24×24
□□	JAN13□EAN13□JAN8□EAN8□CODE39
□□□□	□□ EPSON ESC / POS
□□	□□□□□□
□□□□□	384□/□□203DPI□
□□□□	90□□/□
□□□□	57.5±0.5□□
□□□□	0.06-0.08mm
MCBF	50□□
□□	235X145X125mm
□□□	2.6KG
□□□□	□□□□
□□□	□□□□□□□□□□□□□□□□□□□□
□□	φ65mm
□□	□□□USB□LAN
□□□□	Win9X/Win2000//Win2003/Win Vista/ Win 7/Window XP /, □□ESPON, SAMSUNG
□□	DC12V / 3A

□□□□□□



## 58mm Thermal Receipt Printer

OCPP-582



### Product Picture





## Features

### **Simple but not easy**

High speed, long lifetime, high quality,  
low repair rate, applicable for various  
software





Modern design, easy to use



Support Logo download printing



GB2312 Chinese Character Library  
Support Simplified Chinese/traditional  
Chinese and various international  
languages



100MB Ethernet interface, quicker link and print, avoid losing the order



### All-round show





## Application Area

Food delivery, restaurant, Traffic Citation, Logistics,  
Transportation, Warehouse management, Delivery, Illegal  
Parking Ticket, Drugstore, Price Tag, Retail/Farm



## Parameter


<b>Printing method</b>	Direct thermal
<b>Print font</b>	FONT A: 33 or 35; FONT B: 40 or 42
<b>Character size</b>	Font A : 12 × 24; Font B : 9 × 17; Chinese: 24 X 24
<b>Barcode</b>	JAN13 (EAN13) JAN8 (EAN8) CODE39
<b>Printing command</b>	compatible with EPSON ESC/POS
<b>Language</b>	Buyer language support
<b>Character per line</b>	384dots/line (203DPI)
<b>Printing speed</b>	90mm/sec
<b>Paper width</b>	57.5±0.5mm
<b>Paper thickness</b>	0.06-0.08mm
<b>MCBF(life)</b>	50km
<b>Dimension</b>	235X145X125mm
<b>Gross weight</b>	2.6KG
<b>Auto cutter</b>	manual cutter
<b>Sensor</b>	Paper Near End Sensor, Paper End Sensor, Cover open
<b>Roll paper</b>	φ65mm
<b>Interface</b>	Parallel, USB, LAN
<b>Driver</b>	Win 9X/Win ME/Win 2000/Win 2003/Win NT/Win XP/Win Vista/Win 7/Linux

## Paper Roll Installation




- A Open the printer cover.
- B Install the roller in the roll paper, and put them into the printer.
- C Pull out some paper outside the printer and then close the printer cover.
- D Close the top cover. Press the printer cover to avoid error position of roll paper.
- E Tear-off the paper correctly.

## Connection

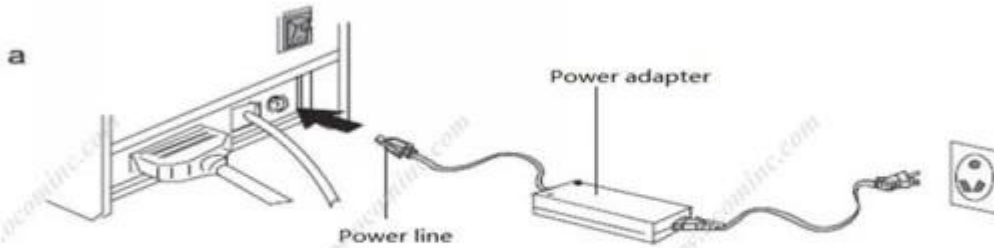





- a. Plug the DC cord connector into the printer's power connector..
- b. Plug the data cable connector into the printer's interface connector.
- C. Plug the drawer cable into the drawer kick-out connector on the back of the printer next to the interface connector.

## Shipping and payment

1. Air, Sea, Express(DHL, FedEx, UPS, EMS, TNT and so on)
2. EXPRESS: around 3-7 working days to arrive
3. INTERNATIONAL AIR MAIL: usually around 2-4 days to arrive, will also depend on which destination port
4. By sea: depend on which destination port
5. T/T
6. Western Union
7. Escrow
8. L/C

## Company Profile



OCOM Technologies Limited is a professional supplier specialized in POS and Auto-ID applications. Our products portfolio covers Barcode Scanner, Barcode Printer, Thermal Printer, Dot Matrix Printer, Magnetic Card Reader, Data Collector, POS Terminal, and other IOT products.





We have FCC, CE, RoHS, and other certifications. We have sell our products to West Europe, North American, Africa, Asia-Pacific and other countries.

OCOM has professional teams including marketing, R&D, quality control, production and sales service. All of the sales representatives have 3 to 10 years experience in international trading, which help us to meet the customers' needs.

OCOM have been sticking to the quality system of ISO9001:2008. We conduct strict IQC, IPQC and OQC inspection in every industrial procedure. Based on our strong capacity, the normal lead time for main products is about 3 to 7 days even for bulk order.

You can find more information of us at: [www.ocominc.com](http://www.ocominc.com),  
Together we quest for the best.

