Hochgeschwindigkeits 80 mm Thermodrucker, POS 80 Drucker
(Modell: OCPP -88A)

Eigenschaften:

1. Einzigartiges Aussehen mit zuverlässiger Form;
2. Hohe Druckgeschwindigkeit bis zu 300 mm / Sekunde;
3. Optional auto Cutter;
4. Schnur und drahtlose Kommunikation für Optionen
5. Mehrere Schnittstellen verfügbar: USB, USB + Serie-+ LAN; und Wifi + USB, Bluetooth + USB
6. Ton- und Lichtalarm für die Küche;
7. Unterstützung für das Drucken mehrerer 1D- und QR-Code-Typen;
8. Unterstützung für mehrere internationale Sprachen;
9. SDK für Android und IOS verfügbar;
10. Zuverlässiger Druckkopf mit einer Lebensdauer von 100 km;
11. Kompatibel mit EPSON ESC / POS-Befehlen.

Parameter:

Druckmethode	Thermodrucke
Zeichen drucken	576 Punkte / Zeile (Standard), 512 Punkte / Zeile; Figuren : Vereinfachtes Chinesisch 24x24 Punkt, Unterstützung 18030 Schriftbibliothek, Unterstützung für traditionelles Taiwan und HK (komplexe Schrift), ANK-Zeichen;
Schriftart	A: 12 * 24 Punkte, 1,5 (W) * 3,0 (H) mm; B: 9 * 17 Punkte, 1,1 (W) * 2,1 (H) mm Vereinfacht / traditionell: 24 * 24 Punkte, 3,0 (B) * 3,0 (H) mm
Barcode-Typ	JUPC-A / UPC-E / JAN13 (EAN13) / JAN8 (EAN8) / CODABAR / ITF / CODE39 / CODE93 / CODE128, QR-Code
Druckgeschwindigkeit	250 mm / Sek ein und zwei Schnittstelle, 300 mm / sec fürr drei Schnittstellen
Schnittstelle	USB,USB + Serie-+ LAN, Wifi + USB, Bluetooth + USB
Druckauftrag	Kompatibel mit EPSON ESC / POS Befehle
Fahrer	Win9X / Windows XP / Win2000 / Win2003 / Win Vista / Win 7 / Win 8 / Win8.1 / Linux, kompatibel mit ESPON, SDK für Android und IOS verfügbar.
Papierbreite	79,5 ± 0,5 mm (Druckbreite 72 mm)
Papierdurchmesser	83 mm
Papierdicke	0,06-0,08 mm
Cutter	EINuto-Schneider (Wahlweise)
Zuverlässigkeit drucken	100 km
Leistung	DC24V / 2.5A
Temperatur	0-45 Grad C

Kontrast Luftfeuchtigkeit	10-80%	
Externe Dimension	190 *145*145(Mm)	
Gewicht	1.60kg	
BestellenIng Information	P / N	DBeschreibung
	OCPP-88A-U	USB Hafenmit Autoschneider
	OCPP -88A-url	SIESB + + serielles Lan Hafenmit Autoschneider
	OCPP -88A-W	wifi + USB Hafenmit Autoschneider
	OCPP -88A-BU	Bluetooth + USB, mit Autoschneider
	OCPP -88A-SIE0	USB Hafenohne Autoschneider
	OCPP -88A-url0	SIESB + + serielles Lan Hafenohne Autoschneider
	OCPP -88A-W0	wifi + USB Hafenmitvon automatischer Schneider
	OCPP -88A-BU0	Bluetooth + USB, ohne automatischen Cutter

Product Picture

Features:

Reliable with good price

Unique appearance with reliable mould

High Printing Speed up to 300mm/second;
Auto Cutter Optional ;
Cord and cordless communication for options

Reliable printer head with 100km life;
Compatible with EPSON ESC/POS commands.

Sound and light alarm supported suitable for kitchen application;

Support multi international languages;
SDK for Android available;

Multiple interfaces available:
USB, USB+Serial, USB+ LAN,
USB+ Serial+ LAN; and Wifi+USB,
Bluetooth+USB+LAN

Afrikaans	Arabic (Tunisia)	English (British)	French (Switzerland)	Latvian	Spanish (Costa Rica)
Albanian	Arabic (Yemen)	English (Canada)	German (Austria)	Lithuanian	Spanish (Dominican)
Arabic (Algeria)	Basque	English (Caribbean)	German (Liechtenstein)	Macedonian	Spanish (Ecuador)
Arabic (bahrain)	Belarus	English (Irish)	German (Luxembourg)	Polish	Spanish (Guatemala)
Arabic (Egypt)	Bulgarian	English (Jamaica)	German (Standard)	Portuguese (Brazil)	Spanish (Mexico)
Arabic (Iran)	Catalan	English (New Zealand)	German (Switzerland)	Portuguese (Portugal)	Spanish (panama)
Arabic (Jordan)	Chinese (Singapore)	English (South Africa)	Greek	Romanian	Spanish (Paraguay)
Arabic (Kuwait)	Chinese (Hongkong)	English (US)	Hebrew	Russian	Spanish (Peru)
Arabic (Lebanon)	Chinese (PRC)	Estonian	Hun	Serbian	Spanish (Uruguay)
Arabic (Libya)	Chinese (Taiwan)	Faroese	Icelandic	Slovak	Spanish (Venezuela)
Arabic (Morocco)	Croatian	Farsi	Indonesian	Slovenian	Thai Language
Arabic (Oman)	Czech	Finnish	Italian (Switzerland)	Swedish	Turkish
Arabic (Qatar)	Danish and Norwegian	French (Belgium)	Italian	Spanish (Argentina)	Ukrainian
Arabic (Saudi Arabia)	Dutch (Belgium)	French (Canada)	Japanese	Spanish (Bolivia)	Urdu
Arabic (Syria)	Dutch (standard)	French (Luxembourg)	Korean	Spanish (Chile)	Vietnamese
Arabic (UAE)	English (Australia)	French (Standard)	Vietnamese	Spanish (Colombia)	

Power plug for option:

How to use?

Connecting the printer:

- The power adapter cable connect to the printer power interface
- The interface cable connect on the printer port behind
- The cash drawer connecting cable connect to the printer's behind the cash drawer interface

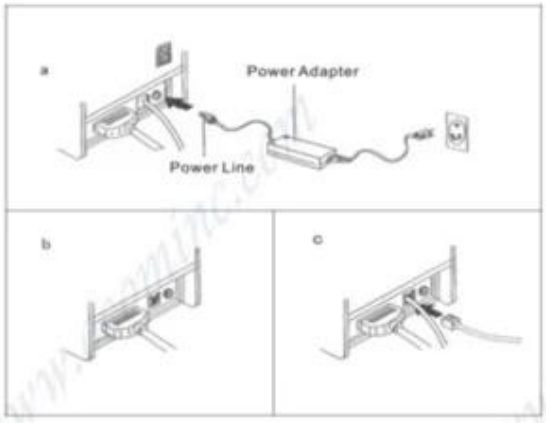

Installation of paper roll:

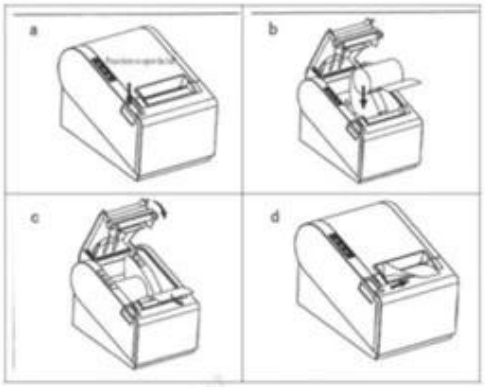

A Open the printer cover.

B Install the roller in the roll paper, and put them into the printer.

C Pull out some paper outside the printer and then close the printer cover.

D Close the top cover. Press the printer cover to avoid error position of roll paper.

E Tear-off the paper correctly.

Setting the Printing Mode(DIP switches):

The DIP switches are used to set the printer to perform various functions, such as cutter mode, character set, speed, beeper, print density and etc.

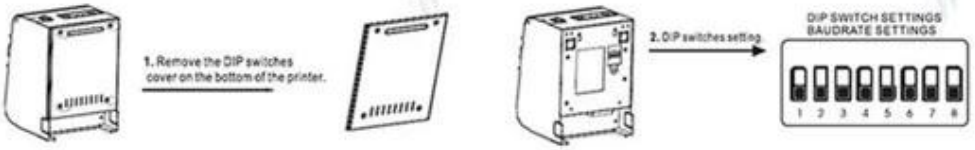

Power indicator:
Turn on/off the printer

Alarm indicator:
When the printer is out of paper, the cutter error occurs or printer head overheats, the ALARM indicator flashes.

Paper indicator:
Both of paper indicator and error indicator are on, means paper end-user, both of paper indicator and error indicator are off, means have paper.

FEED button:
Press to feed paper manually.

✓ Indicates information has been verified onsite by a certification specialist

Test Equipment and Facilities

Verified	Machine Name	Brand & Model No.	Quantity
✓	Ageing Tester	No Information	6
✓	Withstand Voltage Tester	CC2670A	1
✓	Oscilloscope	TBS1102	1
✓	DC Power Supply	PS-305DM	6
✓	Digital Torque Meter	HP100	1
✓	Calliper	GUANGLU	2
✓	Multi-meter	VC890D	7
✓	Test Computer	No Information	13

Verified by TUV on 2013.7.15

Certification:

Warranty and After Sales:

- All products' warranty are not less than 12 month, some models even up to 24 months warranty.
- Spare parts will be provided for mass orders for customers' local maintenance.
- Any product found to be defective within 30 days of shipment shall be deemed Dead on Arrival (DOA). DOA products will be advance replaced and shipped via express.
- Have distributors or authorized agents in the main market who can provide local repair and replacement services.
- Professional CRM management insures fast respond for customer's enquiries and orders tracking.
- Sales with many years experience in foreign trade, proficient in foreign languages and strong sense of responsibility.
- 7*24 hours online, responds with 12 hours in working days, and within 24 hours for rest days.

Packing and Shipment:

Payment:

Kontakt&Ampere; ENSP; UNS

Adresse: 4 / F, Block 10, Zhongxing Industriepark, Chuangye Road, Nanshan District, Shenzhen 518054, China;
Webseite: www. ocom inc.com, www. pos solution.com.cn;
Email: sales07@ocominc.com, sales07@ocomtech.com .cn;
Geschäftsmanager: cn1000542707;
Skype: leben: ocom sales07;
MSN: ocomsales07@hotmail.com;
QQ: 3152989359;
Mobil / WeChat / WhatsApp: 0086.189.48778596;
Tel: 0086,755.86053207-807;
Faxgerät: 0086,755.86053207-868;

Phoebe Hong

OCOM Technologies Limited

Add: 4/F, Block10, Zhongxing Industrial Park, Chuangye Road, Nanshan District, Shenzhen 518054, China
Tel: 0086.755.8605.3207 ext 807
Fax: 0086.755.8605.3207 ext 868
Web: www.ocominc.com
E-mail: sales07@ocominc.com, sales07@ocomtech.com.cn
Skype: ocomsales07; **MSN**: ocomsales07@hotmail.com
Ali TM: cn1000542707; **QQ**: 3152989359
Mobile/Wechat/Whatsapp: 0086.189 4877 8596

Reliable One-Stop Supplier for POS and Auto-ID Related Products