

Direkter Thermo-/Thermotransfer-Barcode-Etikettendrucker

(Modelll: OCBP-T4201/T4301)

Merkmale:



Direkter Thermo-/Thermotransferdruck;
200 MHz 32-Bit-RISC-Prozessor;
8 MB SDRAM 8 MB Flash-Speicher;
Design mit zwei Motoren und Getriebeantrieb;
152 mm (6 Zoll) Zoll pro Sekunde Druckgeschwindigkeit (max.);
300 Meter (984 Zoll) Farbbandvorrat auf einem 25,4 mm (1 Zoll) Kern;
203 dpi oder 300 dpi Auflösung als Option;
Hochwertiger japanischer ROHM-Druckkopf, die Drucklebensdauer beträgt bis zu 100 km;
Unterstützt Lückensensor, Sensor für offenen Deckel, Sensor für schwarze Markierungen, Farbbandsensor;
Bietet kostenlos bartender EtikettenbearbeitungsSoftware;
Selbstentwickelte kostenlose Bearbeitungssoftware unterstützt IOS/Android/Harmony OS/Windows/MAC, interoperabel mit fünf Terminals.

Spezifikation

Allgemein		
Model	OCBP-T4201	OCBP-T4301
Farbe	Schwarz	
Prozessor	32-Bit-CPU	
Optionale Schnittstelle	USB2.0 (Standard) / USBBT / USBBTWIFI / USBLAN optional	
Echtzeituhr	Standard	
Druckersprache	TSPL	

Lebensdauer des Druckerkopfes	100 km	
Stromversorgung	Eingang: AC 100-240 V, 50-60 Hz, Ausgang: DC 24 V/2,5 A	
Sensoren	Lückensensor, Abdeckungsöffnungssensor, Schwarzmarkierungssensor, Farbbandende-Sensor	
Erinnerung	8 MB Flash-Speicher/8 MB SDRAM/Flash-Speicher	
Zubehör	Kurzanleitung, USB-Kabel, Netzkabel, Etikettenspindel Externes Universal-Schaltnetzteil, Befestigungslasche x 2, 1,5-Zoll-Kernadapter x 2, Farbbandspindel x 2, Farbbandpapierkern	
software	Treiber: Windows/Mac SDK: Windows/Android/iOS	
Druckfähigkeit		
Druckmethode	Thermotransfer / Direktthermo	
Auflösung	8 Punkte/mm (203 DPI)	12 Punkte/mm (300 DPI)
Max. Druckgeschwindigkeit	152 mm (6 Zoll) / s	127 mm (5 Zoll) / s
Max. Druckbreite	104 mm (4,09 Zoll)	104 mm (4,09 Zoll)
Max. Drucklänge	1178 mm (70 Zoll)	889 mm (35 Zoll)
Grafikdruck	BIMAP, BMP, PCX (max. 256 Farben)	
Barcode und Zeichen		
Barcode	1D-Barcode: Code 39, Code 93, Code 128UCC, Code 128, Teilmengen A, B, C, Codabar, Interleaved 2 of 5, EAN-8, EAN-13, EAN-128, UPC-A, UPC-E, EAN und UPC 2 (5) Ziffernzusatz, MSI, PLESSEY, POSTNET, China POST, GS1 DataBar, Code 11 2D-Barcode: PDF-417, Maxicode, DataMatrix, QR-Code, Aztec	
Interne Schriftarten	8 alphanumerische Bitmap-Schriftarten, Windows-Schriftarten können über die Software heruntergeladen werden.	
Schriftart- und Barcode-Rotation	0°, 90°, 180°, 270°	
Grafik	BIMAP, BMP, PCX (max. 256 Farben)	
Medien		
Medientyp	Endlos, gestanzt, schwarze Markierung, Endlosfalte, gekerbt (außen gewickelt)	
Medienbreite	20-112 mm (0,78-4,4 Zoll)	
Mediendicke	0,06 ~ 0,254 mm (2,36 ~ 10 mil)	
Etikettenlänge	10 ~ 1178 mm (0,39" ~ 70")	10 ~ 889 mm (0,39" ~ 35")
Kapazität der Etikettenrolle	127 mm (5") AD (Außendurchmesser)	
Farbbandkapazität	300m lang max	
Bandbreite	110mm	
Innendurchmesser des Bandkerns	25,4 mm (1")	
Körperlich		
Dimension	280 mm * 210 mm * 170 mm	
Gewicht	Netto 2,25 kg Brutto: 3,25 kg	
Paketbox	370*240*205mm	
4 in 1 Karton	500*390*430mm/14,5kg	
Umfeld		
Arbeitstemperatur und Luftfeuchtigkeit	0 bis 45 Grad Celsius, 10 % ~ 80 % Keine Kondensation	
Lagertemperatur und Luftfeuchtigkeit	-20 bis 60 Grad Celsius, 10 % ~ 90 % Keine Kondensation	

Thermal Transfer Label Printer

Versatility Creates Efficiency

- Thermal Direct Labels
- Thermal Transfer Labels
- PET Silver Labels
- Garment Hang Tags
- Wash Care Labels



Dual Printing Mode

Direct Thermal Print / Thermal Transfer Print

Switch at Ease Between Both Modes

Direct Thermal Mode

MODE 1



Direct
Thermal
Labels

No TTR Ribbons Required

Thermal Transfer Mode

MODE 2



Thermal Transfer Labels

PET Silver Labels

Garment Hang Tags

Wash Care Labels

TTR Ribbons Required

Professional and Durable Print Head

High-resolution Printing at Lightning Speeds

203dpi Printing Speed

152^{Max.}mm/s



Ordinary Print Head

Durability

Professional Print Head

Durability

Versatile Sizes Compatible Adjustable Media Guide

Different Sizes Printed by Guide Width Adjusted Flexibly



Various Connectivity

Multiple OS Compatible

Running smoothly with
Windows XP, 7, 8, 10, 11 and Mac OS

USB Connectivity

- ✓ Windows PC
- ✓ Mac

Also compatible with Google Chrome OS after installing the plugin in the Google browser.

Bluetooth Connectivity

For Bluetooth Version Only

- ✓ Windows Laptop
- ✓ Android Phone
- ✓ iPhone
- ✗ Mac

WiFi Connectivity

For WiFi Version Only

- ✓ Windows PC
- ✓ Mac
- ✓ Android Phone
- ✓ iPhone

Ethernet Connectivity

For Ethernet Version Only

- ✓ Windows PC
- ✓ Mac

Widely Applicable Supporting Various Labels



Direct Thermal Labels



PET Silver Labels



Garment Hang Tags



Thermal Transfer Labels



Wash Care Labels



Price Tags



Different Resolution for Option

For Different Printing Needs



For Most Printing Needs




For Fine Text Printing Needs

Resolution	203dpi	300dpi
Label Material	Direct Thermal Labels, Thermal Transfer Labels, PET Silver Labels, Synthetic PP Labels, Garment Hang Tags, Wash Care Labels	
TTR Ribbons	Wax Ribbon, Wax-resin Ribbons, Resin Ribbons, Washable Resin Ribbons	
Available Version	USB / Bluetooth / WiFi / Ethernet	
Media Type	Continuous paper, gap paper, folded paper, black mark paper, hole-punched paper	
Printer Dimension	280×220×168mm(L×W×H)	
Print Width	15-104mm	15-108mm
Print Speed	152mm/s	127mm/s


Appearance Components

- ① LED Indicator Light + FEED Button
- ② Cover Open Switch
- ③ Viewing Window
- ④ Label Exit

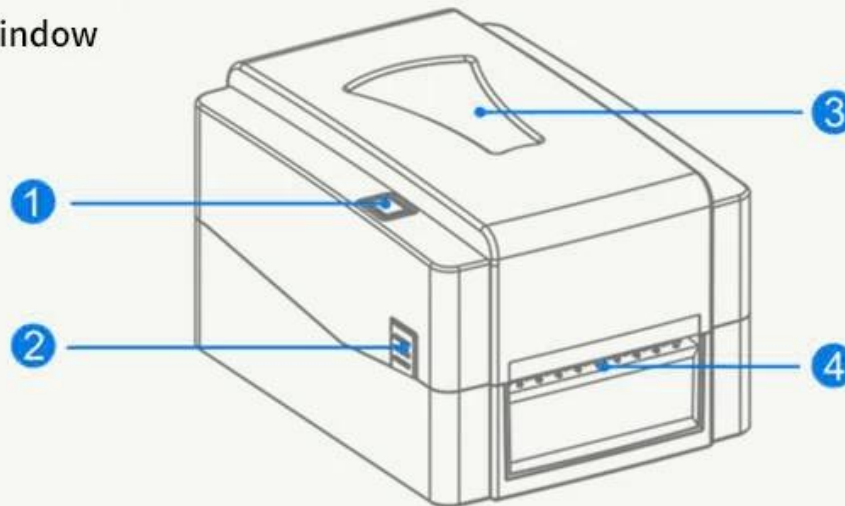

Internal Components

- ① Ribbon Rewind Gear
- ② Print Head Open Switch
- ③ Print Head
- ④ Ribbon Supply Gear
- ⑤ Ribbon Baffle Plate
- ⑥ Media Guide
- ⑦ Rubber Platen Roller
- ⑧ Gap Sensor
- ⑨ Black Mark Sensor

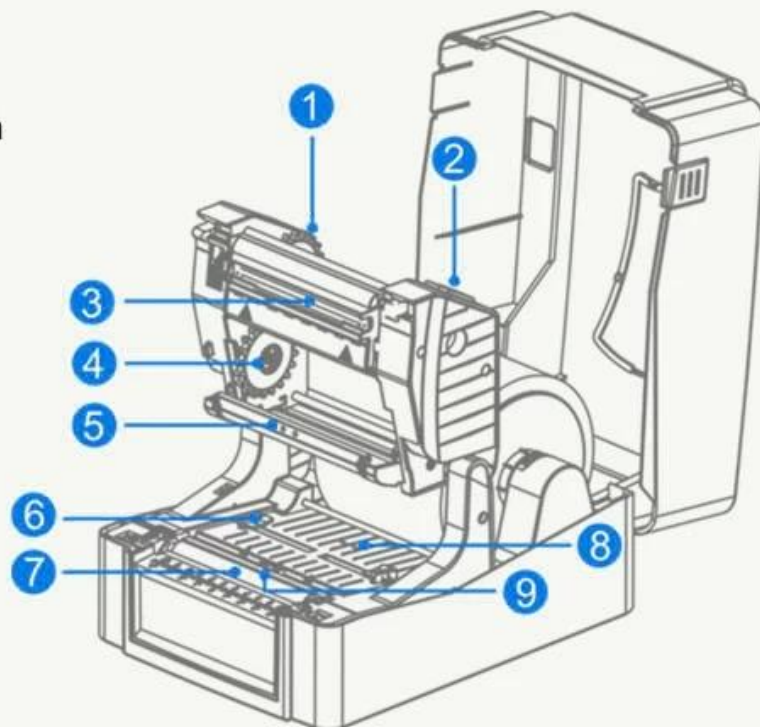

Default Accessories List



1



2



3



4



5



6



7



8



9

- ① User Guide ② USB Cable ③ Power Adapter ④ Power Cord
- ⑤ Media Shaft & Baffle Plate x 2 ⑥ Ribbon Shaft x 2
- ⑦ Ribbon Rewind Paper Core ⑧ Ribbon Sample Roll
- ⑨ Label Sample Roll

Professional and Eye-catching Packing

Compact and Protective



Packing Specs

Unit box size (LWH)
370*240*205mm

Unit box N'W.
2.92kg

Unit box G'W.
3.47kg

4 Units Per Master Carton

Master carton size (LWH)
500*390*430mm

Master Carton N'W.
11.68kg

Master Carton G'W.
15kg











