OCPP -88A POS 80-mm-Desktop-Bluetooth-Thermodrucker

(Modell: OCPP -88A-BU)

Eigenschaften:

- 1. Einzigartiges Aussehen mit zuverlässiger Form;
- 2. Hochgeschwindigkeitsdruck mit einer Geschwindigkeit von bis zu 300 mm / s;
- 3. Optionaler automatischer Schneider;
- 4. Leitung und Optionen Schnurlose Telekommunikation
- 5. Schnittstellen: Bluetooth + USB
- 6. Unterstützung für akustische Alarmanwendungen ist für die Küche verfügbar.
- 7. Stützen Sie verschiedene Arten eindimensionales und zweidimensionales Strichkodedrucken;
- 8. Unterstützt eine Vielzahl von internationalen Sprachen;
- 9. SDK für Android bietet;
- 10. Zuverlässige Lebensdauer des Druckkopfes und hundert Kilometer;
- 11. Kompatibler Befehl EP SON ESC / POS.

Hochwertiger 80mm Thermodrucker, POS-Drucker, 80mm Bluetooth-Drucker mit Auto-Cutter

Parameter:

Druckmethoden	Thermo-Liniendruck				
		andard), 512 Punkte / Zeile;			
Gedruckte Zeichen	Zeichen: Vereinfachtes Chinesisch (24x24), Unterstützung für 18030-Schriftarten, Unterstützung für				
	Taiwan und Hongkong, traditionelle (komplexe Schrift), ANK-Zeichen;				
	A: 12 · 24 Punkte, 1,5 (B) · 3,0 (H) mm;				
Schriftart	B: 9 · 17 Punkte, 1,1 (Breite) · 2,1 (H) mm				
	Vereinfacht / Traditionell: 24 * 24 Punkte, 3,0 (B) * 3,0 (H) mm				
Barcode-Typen	QR-Code	3 (EAN13) / JAN8 (EAN8) / CODABAR / ITF / CODE39 / CODE93 / CODE128,			
Druckgeschwindigkeit		schnittstelle bis 300 mm / s Doppelschnittstelle und Dreifachschnittstelle			
Schnittstelle		SB + LAN, USB + seriell + LAN, Wireless + USB, Bluetooth + USB			
Druckbefehl		PSON ESC / POS-Befehl			
Treiber	Unter Win9X / Windows XP / Win VISTA / WIN2000 / Win2003 / Win / Win7 8 / win8.1 / Win10 / Linux und ESPON bietet das SDK Kompatibilität mit Android.				
Druckbreite	79,5 ± 0,5 mm (Druckbreite 72)				
Papierdurchmesser	83 mm				
Papierstärke	0,06-0,08 mm				
Messer	Automatischer Cutter (optional)				
Druckzuverlässigkeit	Einhundert Kilometer				
Leistung	DC24V / 2,5A				
Temperatur	0-45 Grad Celsius				
lm Kontrast Luftfeuchtigkeit	10-80%				
Maße	190 * 145 * 145 (MM)				
Gewicht	1,60 kg				
	P/N	Beschreibung			
	OCPP -88A-U	USB-Anschlüsse unterstützen automatische Cutter			
	OCPP -88A-UR	USB + serielle Schnittstelle, unterstützt automatische Schneidevorrichtung			
	OCPP -88A-UL	USB + LAN-Anschlüsse unterstützen Auto-Cutter			
Bestellinformationen	OCPP -88A-URL	USB + serielle + LAN-Anschlüsse mit automatischem Cutter			
	OCPP -88A-W	Wireless + USB-Anschluss, automatischer Cutter			
	OCPP -88A-BU	Bluetooth + USB, unterstützt automatische Cutter			
	OCPP -88A-U0	USB-Anschluss, kein automatischer Cutter			
	OCPP -88A-UR0	USB + seriell, kein automatischer Cutter			
	OCPP -88A-UL0	USB + LAN-Anschluss, kein automatischer Cutter			
	OCPP -88A-URL0	USB + serieller + Lan-Anschluss, ohne automatischen Cutter			
	OCPP -88A-W0	OCPP -88A-W0 Wireless + USB-Anschluss, kein automatischer Cutter			
	OCPP -88A-BU0	Bluetooth + USB, kein automatischer Cutter			





Reliable with good price

Unique appearance with reliable mould





High Printing Speed up to 300mm/second; Auto Cutter Optional; Cord and cordless communication for options

Reliable printer head with 100km life; Compatible with EPSON ESC/POS commands.







Sound and light alarm supported suitable for kitchen application;

Support multi international languages; SDK for Android available;





Multiple interfaces available: USB, USB+Serial, USB+LAN, USB+ Serial+ LAN; and Wifi+USB, Bluetooth+USB+LAN

Support multiple 1D barcode and QR code printing;





Application Area

- Order printing for restaurant kitchen;
- Electronic cash register POS system bill printing;
- Electronic funds transfer (EFT) POS system bill printing;
 - Sports, postal services, civil aviation ticket printing;

 - Inquires and service system for ticket printing
 Measuring instrument information on printing;
 - > Tax, single-bill printing







Printing Method	Thermal line printing				
Printing Character	576dots/line (default), 512dots/line;				
	Characters Simplified Chinese 24x24 point, support 18030 font I ibrary, support Taiwan				
	and HK traditional (complex font), ANK characters;				
	A: 12*24dots,1.5(W)*3.0(H)mm;				
Font	B: 9*17dots,1.1(W)*2.1(H)mm				
	Simplified/Traditional : 24*24dots, 3.0(W)*3.0(H)mm				
Barcode Type	JUPGA/UPC- E/JAN13(EAN13)/JAN8(EAN8)/CODABAR/ITF/CODE39/CODE93/CC DE128,QR code				
Printing Speed	250mm/sec for a single	nterface ,300mm/secfor Double interface and three interfaces			
Interface	USB, USB+Serial, USB+	LAN, USB+ Serial+LAN, Wifi+USB, Bluetooth+USB+LAN			
Printing Command	Compatible with EPSONESC/POScommands				
Drivers	Win9X/ Window XP /Win2000/ Win2003/Win Vista/ Win 7/Win 8/win8.1/Linux, compatible with ESPON, SDK for Android available.				
Printing Width	79.5 ± .5mm(print width 72mm)				
Paper Diameter	83mm				
Paper Thickness	0.060.08mm				
Cutter	Auto cutter(optional)				
Printing Reliability	100km				
Power	DC24V/2.5A				
Temperature	0-45 degree C				
Contrast Humidity	10-80%				
External Dimension	190*145*145(mm)				
Weight	1.60kg				
	P/N	Description			
	OCPP -88A-U	USB port, with auto cutte			
	OCPP -88A-UR	USB+Serialport, with auto cutter			
	OCPP -88A-UL	USB+Lanport, with auto cutter			
	OCPP -88A-URL	USB+Serial+Lan port, with auto cutter			
	OCPP -88A-W	Wifi+USB port, with auto cutter			
Ordering information	OCPP -88A BUL	Bluetooth+USB+LAN, with auto-cutter			
	OCPP -88A-U0	A-U0 USB port , without auto cutter			
	OCPP -88A - UR0	USB+Serialport, without auto cutter			
	OCPP -88A -UL0	USB+Lanport, without auto cutter			
	OCPP -88A-URL0 USB+Serial+Lanport , without auto cutter				
	OCPP -88A-W0 Wifi+USB port , without auto cutter				
	OCPP -88A-BUL0	Bluetooth+USB+LAN, without auto-cutter			

Supported Languages:


Afrikaans	Arabic (Tunisia)	English (British)	French (Switzerland)	Latvian	Spanish (Costa Rica)
Albanian	Arabic (Yemen)	English (Canada)	German (Austria)	Lithuanian	Spanish (Dominican)
Arabic (Algeria)	Basque	English (Caribbean)	German (Liechtenstein)	Macedonian	Spanish (Ecuador)
Arabic (bahrain)	Belarus	English (Irish)	sh) Cerman Polish (Luxembourg)		Spanish (Guatemala)
Arabic (Egypt)	Bulgarian	English (Jamaica)	Cerman (Standard) Portuguese (Brazil)		Spanish (Mexico)
Arabic (Iran)	Catalan	English (New Zealand)	(New Zealand) German (Switzerland) Portu		Spanish (panama)
Arabic (Jordan)	Chinese (Singapore)	English (South Africa)	frica) Greek Romania		Spanish (Paraguay)
Arabic (Kuwait)	Chinese (Hongkong)	English (US)	Hebrew	Hebrew Russian	
Arabic (Lebanon)	Chinese (PRC)	Estonian	Hun Serbian		Spanish (Uruguay)
Arabic (Libya)	Chinese (Taiwan)	Faroese	Icelandic	Slovak	Spanish (Venezuela)
Arabic (Morocco)	Croatian	Farsi	Indonesian	Slovenian	Thai Language
Arabic (Oman)	Czech	Finnish	Italian (Switzerland)	Swedish	Turkish
Arabic (Qatar)	Danish and Norwegian	French (Belgium)	Italian	Italian Spanish (Argentina)	
Arabic (Saudi Arabia)	Dutch (Belgium)	French (Canada)	Japanese	Spanish (Bolivia)	Urdu
Arabic (Syria)	Dutch (standard)	French (Luxembourg)	Korean	Spanish (Chile)	Vietnamese
Arabic (UAE)	English (Australia)	French (Standard)	Vietnamese	Spanish (Colombia)	




How to use?

Connecting the printer:

- The power adapter cable connect to the printer power interface
- The interface cable connect on the printer port behind
- The cash drawer connecting cable connect to the printer's behind the cash drawer interface

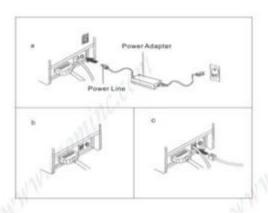



Installation of paper roll:

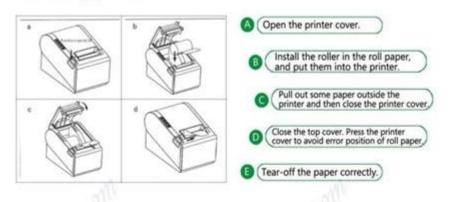

Setting the Printing Mode(DIP switches):

The DIP switches are used to set the printer to perform various functions, such as cutter mode, character set, speed, beeper, print density and etc.



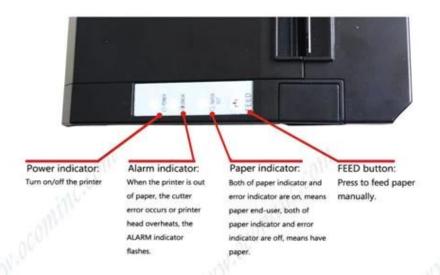

Clean of printer:

When the printer has the following conditions should clean the print head:

- The printer does not clear
- The page frame lengthways of printer has some not clean
- Paper feed with a large noise

Printer cleaning steps as follows:

- Shut off the power of printer, Open the Top Cover; If there is paper, please wipe off the paper;
- If it just finished a printing, please wait for a while until the print head cooling;
- With a soft cotton cloth dipped in ethanol (to be wrung) erase the thermal printer head thermal surface dust, stains;
- As the anhydrous ethanol evaporate completely, closed the top cover, and restart to print.

Production Process

No.	Production Process	No.	Production Process	No.	Production Process
4)	400	2		3	
	Inspection 1		Soldering		Assembling 1
4		5		6	
	Assembling 2		Function Test		Ageing Test
7		8		9	
	Inspection 2	1	Packing 1	1	Packing 2



Verified by TUV on 2013.7.15

Quality Assurance:



OCOM is dedicated to providing most cost-effective products and services with highest quality that will meet customers'satisfaction.

Since the establishment, OCOM has been sticking strictly to the standard and requirements of ISO9001: 2000 in the processes of research, design, manufacturing and services. OCOM's products have passed CE, FCC, TUV, RoHs and other certifications.

We make strictly IQC, IPQC and OQC inspection per industrial standard. All the products must pass 24-48 hours aging test before shipment. Some designated models can have as long as 24 months warranty.

Test Equipments:

✓ Indicates information has been verified onsite by a certification specialist.

Test Equipment and Facilities

Verified	Machine Name	Brand & Model No.	Quantity
1	Ageing Tester	No Information	6
1	Withstand Voltage Tester	CC2670A	1
1	Oscilloscope	TBS1102	1
1	DC Power Supply	PS-305DM	6
1	Digital Torque Meter	HP100	1
V	Calliper	GUANGLU	2
1	Multi-meter	VC890D	7
1	Test Computer	No Information	13

Verified by TUV on 2013.7.15

Certification:










Warranty and After Sales:



- Spare parts will be provided for mass orders for customers' local maintenance.
- Any product found to be defective within 30 days of shipment shall be deemed Dead on Arrival (DOA). DOA products will be advance replaced and shipped via express.
- Have distributors or authorized agents in the main market who can provide local repair and replacement services.
- Professional CRM management insures fast respond for customer's enquiries and orders tracking.
- Sales with many years experience in foreign trade, proficient in foreign languages and strong sense of responsibility.
- 7*24 hours online, responds with 12 hours in working days, and within 24 hours for rest days.

Packing and Shipment:





Payment:









secure payment







Customers Reference

Over the years, OCOM keep efforts on marking "OCOM" as an internationally recognized brand, and we have established goods relationship with our customers and have friendly communication with each other.



Company Profile





OCOM Technologies Limited is a professional supplier specialized in POS and Auto-ID applications. Our products portfolio covers, Thermal Printer, Barcode printer, Dot Matrix Printer, Barcode Scanner, Magnetic Card Reader, Data Collector, POS Terminal, and other IOT products.

We have FCC, CE, RoHS, and other certifications. We have sell our products to West Europe, North American, Africa, Asia-Pacific and other countries.

OCOM has professional teams including marketing, R&D, quality control, production and sales service. All of the sales representatives have 3 to 10 years experience in international trading, which help us to meet the customers' needs. OCOM have been sticking to the quality system of ISO9001:2008. We conduct strict IQC, IPQC and OQC inspection in every industrial procedure. Based on our strong capacity, the normal lead time for main products is about 3 to 7 days even for bulk order.

You can find more information of us at: www.ocominc.com, Together we quest for the best.













Why you choose us?



Contact us

Any queries, please contact us immediately, big supprise is waiting for you.

Sales Center:

Address: Unit701, Block 14, Zhongxing Industrial Park, Chuangye Road, Nanshan

District, Shenzhen 518054, China

Website: www.ocominc.com www.possolution.com.cn; E-mail: ocom@ocominc.com, info@possolution.com.cn;

Tel: +86.755.86053207 ext 800; Fax: +86.755.86053207 ext 868; QQ: 2485890637, 190852203; Wechat: szocominc, hj34924238; Whatsapp: 008613352932860;



- *Spezifikation
- *Verfahrenshandbuch
- *Anleitung
- *Treiber für WinXP Win2000 WinVista Win8-32bit
- *Treiber Win7 und Win8-64bit
- <u>*Linux-Treiber</u>
- *Werkzeug zur Einstellung der Druckerparameter
- *USB-Druckdemo(Demo der Anwendungssoftware)
- *SDK Für Android
- *CD Dateien