

Technische Spezifikation:

Modell	POS-T2
Name	5,5 Zoll kapazitiver Touchscreen, unterstützen die elektronische Signatur
Batterie	3,8 V /6400 mAh
Netzteil	Eingang: 100-240 V, 50/60 Hz, 1,5 A Ausgang: 5V DC /2A
Ladegerät-Schnittstelle	USB Typ C
Anzeige	
Hauptbildschirm	5,5-Zoll-HD-Touchscreen-Display
Auflösung	1280*720
Leistung	
CPU	Deca-Core MT6797 Tri-Cluste-A72*2A53*8 2,3 GHz Prozessor
RAM	3 GB
Blitz	16 GB Flash
Kommunikation	2G/3G/4G
Betriebssystem	Android 8.0
Taste	Ein-/Aus-Taste, Scan-Taste, Lautstärketaste
Bluetooth	Bluetooth 4.0
W-LAN	WIFI 802.11 b.g.n.ac
Drucker	58-mm-Thermo-Belegdrucker
Papierrolle	Breite: 58 mm; Durchmesser: ≤40mm
Scanner	Kameradekodierung 2D-Scanner (Option)
NFC	Unterstützt ISO/IEC 14443A&B, Mifare, Felica-Karte
SIM-Slot	Sim*2
Lautsprecher	Digitaler Audio-Lautsprecher
Fingerabdruck	Fingerabdruck (optional)
GPS oder AGPS	Unterstützt GPSAGPS
MDM	Unterstützung
Peripheriezubehör	Paket

Zubehör	USB Typ C*1
	Netzteil*1
	Bedienungsanleitung*1
Umfeld	
Betriebstemperatur	0 bis 40 Grad Celsius
Lagertemperatur	-10 bis 60 Grad Celsius
Arbeitsfeuchtigkeit	10 % ~ 80 %
Lagerfeuchtigkeit	10 % ~ 90 %

SMART Handheld POS Terminal

MULTI-PLATFORM AUTOMATIC PRINTING
easy to deal with a variety of working environment





Thermal Receipt
Label Printing



Touch HD
Screen



Multi-version
Connection



5 Million
Pixels



3GB+16GB
Standard



Removable 6400mAh
Large Capacity Battery



NFC
Standard



CPU
Deca-core

Multiple versions Connection options

Support full Net-com, Bluetooth, WIFI multiple versions of connection, Excellent experience



Support 2.4G&5G




Built-in NFC Module



2G/3G/4G communication

Support Download APP from Google Play Store

High Quality and Performance, Your reliable POS

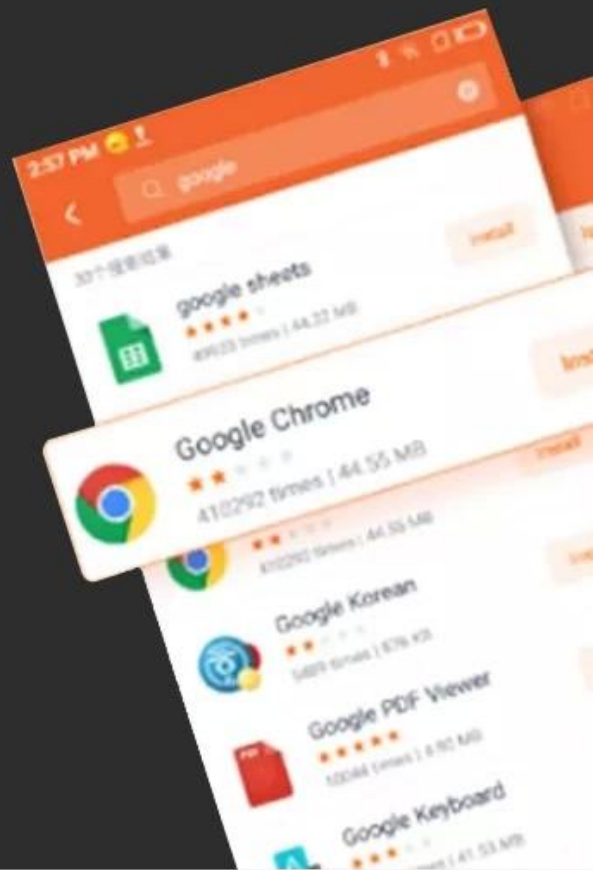

Large paper bin Print more durable

Can accommodate 42mm diameter thermal paper to avoid frequent paper changes and improve printing efficiency.

58mm

Maximum
paper width

42mm


Maximum
paper diameter



■ SMART PRINTING


5.5-inch HD IPS Screen

720*1280 resolution, stable every pixel, allowing users to see more clearly

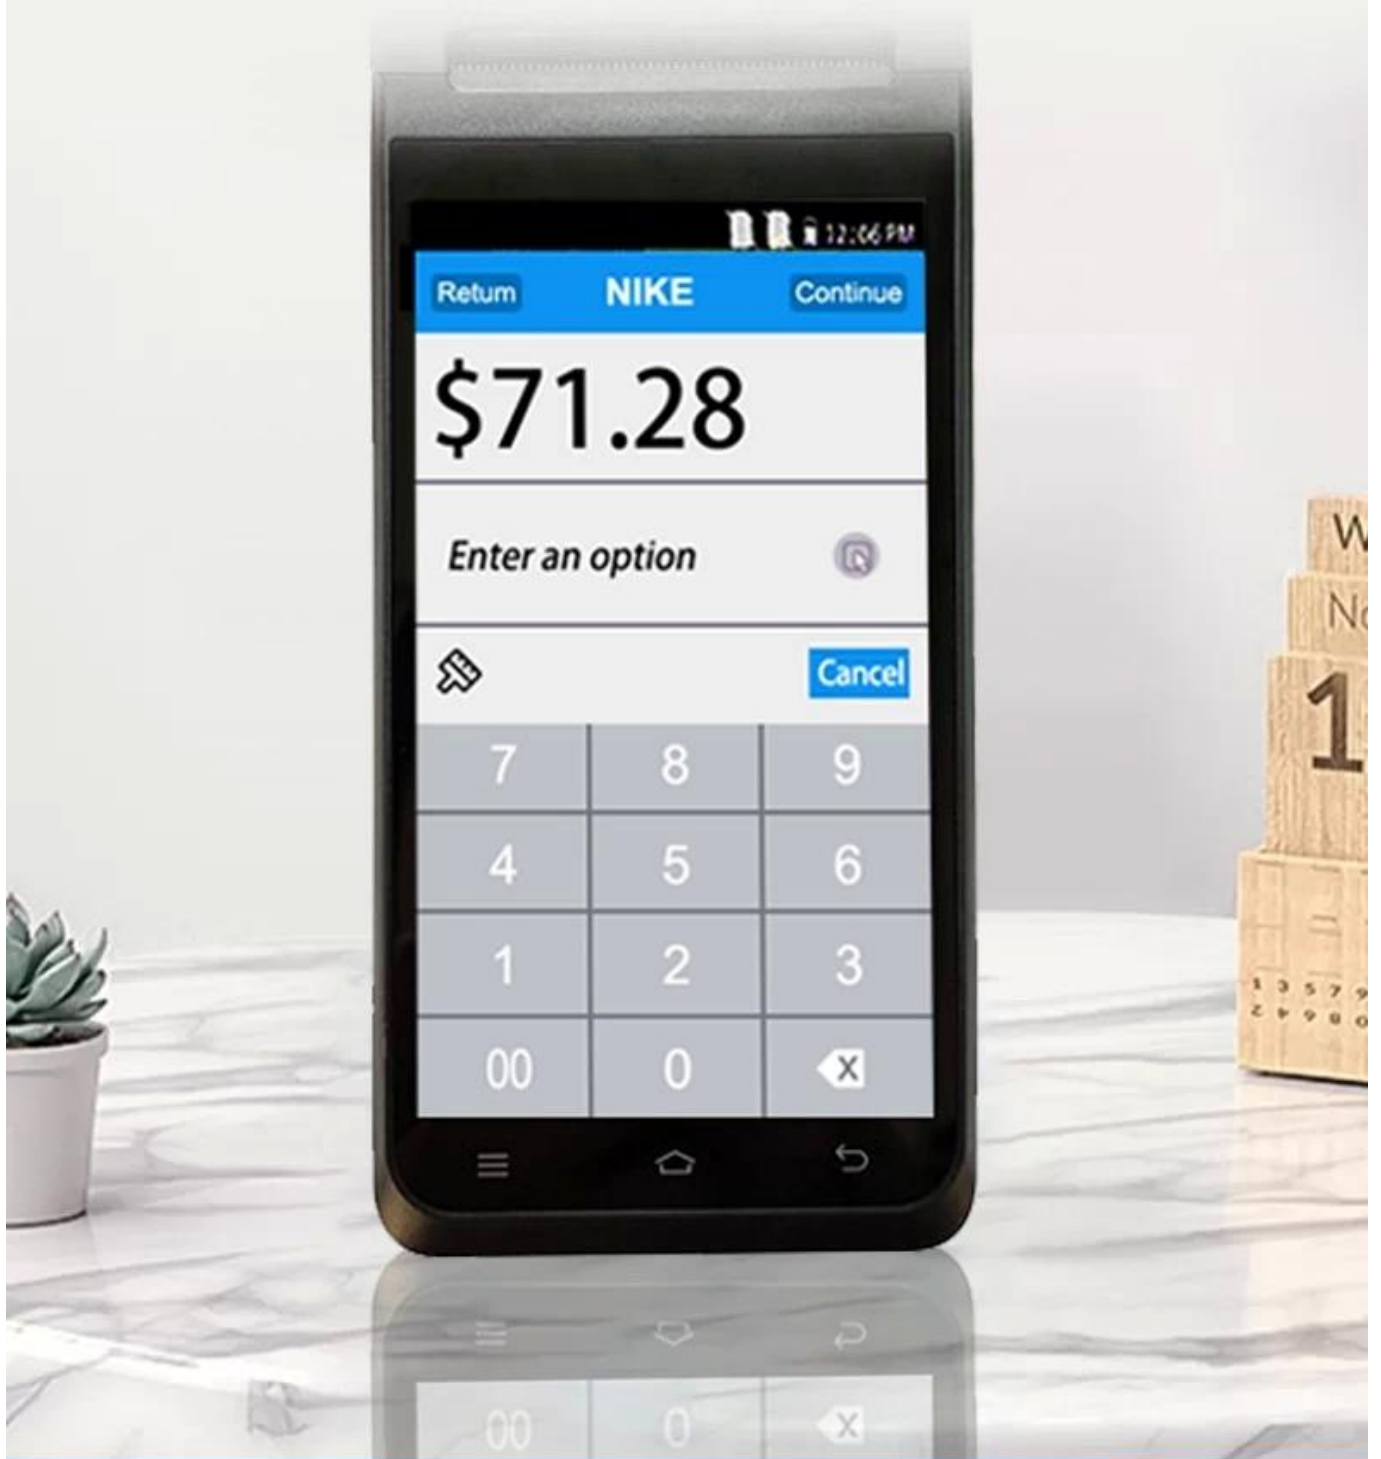

2D Barcode Scanner for Optional

5 Million Rear HD Camera
quickly identify barcodes QR codes
record important information



Scan code



Photo



Video



NFC Contactless Card

NFC contactless card reader payment function




Strong Performance



Memory

3GB RAM+16GB ROM

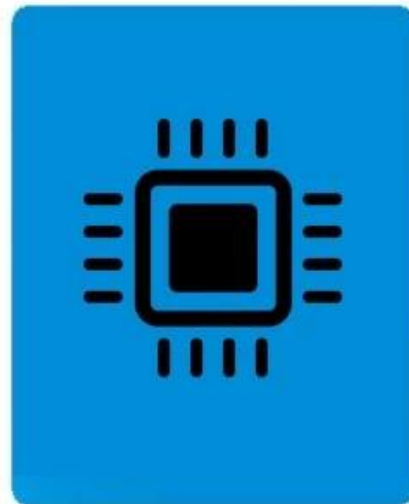

Processor

2.3GHz processor

Built-in MDM Control System



Application Management

Support Software Shielding, Pre-installation, Intergrated Testing, Remote Upgrade and management ,etc.

appMgr

myAppList

marketList

System Customization

Specified APP can be installed or reinstalled by default once Internet connected for first time or be deleted.

systemCustom

defaultApp

Device Management

Check all information and usage status of hardware devices such as operation logs.

deviceMgr

MyDevice

Statistics

Check device activation time, positioning, software information and version.

Statistics

Mydevice

DeviceInfo

Kioak APP

Specified APP runs automatically after the hardware is powered on. Can't quit, can't be uninstalled.

Kioak

Kioak App.

security

Double Frequency WIFI

Double insurance of 4G high Speed network and dual-frequency WIFI network can ensure the real-time data communication in different using environment



2.4G 5G



Large Capacity Battery

Removable 6400mAh large capacity pure cobalt battery



Fingerprint Security

Ministry of Public Security or FBI fingerprints (Optional)

70%

Sensitive
Ascension



Fingerprint ID



Structure specification

SMART PRINTING



Simple construction Easy operation



Dimensions

SMART PRINTING



197*82*57.5mm



Manual measurement has slight errors and does not affect the use.

Packaging accessories

SMART-PRINTING



Beautiful packaging, original accessories



01 Machine 02 User Manual 03 Roller Paper

04 Type C Cable 05 Charging Adaptor

Applicable Scene

Powerful functions such as mobile cashier, receipt printing, pin storage, queuing, billing, label printing, QR code collection, NFC membership management, infrared physical temperature measurement, etc.



Relevante Dokumente:

[POS-T2 SDK](#)