

Impresora térmica de alta velocidad de 80 mm, impresora POS 80 (Modelo: OCPP -88A)

Características:

1. Aspecto único con molde confiable;
2. Alta velocidad de impresión de hasta 300 mm / segundo;
3. Opcional auto Cutter;
4. Comunicación por cable e inalámbrica para opciones
5. Múltiples interfaces disponibles: USB, USB + serie-+ LAN; y Wifi + USB, Bluetooth + USB
6. Sonido y alarma de luz compatibles para uso en la cocina;
7. Soporte para imprimir múltiples tipos de códigos 1D y QR;
8. Soporte para múltiples idiomas internacionales;
9. SDK para Android y IOS disponible;
10. Cabezal de impresión confiable con una vida útil de 100 km;
11. Compatible con los comandos EPSON ESC / POS.

parámetros:

Método de impresión	Impresión de líneas térmicas
Carácter de impresión	576 puntos / línea (predeterminado), 512 puntos / línea; Caracteres : Chino simplificado 24x24 puntos, soporte 18030 biblioteca de fuentes, soporte para Taiwán tradicional y HK (fuente compleja), ANK personajes;
fuelle	A: 12 * 24 puntos, 1.5 (W) * 3.0 (H) mm; B: 9 * 17 puntos, 1.1 (W) * 2.1 (H) mm Simplificado / tradicional: 24 * 24 puntos, 3.0 (B) * 3.0 (H) mm
Tipo de código de barras	JUPC-A / UPC-E / JAN13 (EAN13) / JAN8 (EAN8) / CODABAR / ITF / CODE39 / CODE93 / CODE128, código QR
Velocidad de impresión	250 mm / seg un y dos interfaz, 300 mm / seg parar tres interfaces
Interfaz	USB,USB + serie-+ LAN, Wifi + USB, Bluetooth + USB
Trabajo de impresión	Compatible con EPSON ESC / POS comandos
conductores	Win9X / Windows XP / Win2000 / Win2003 / Win Vista / Win 7 / Win 8 / Win8.1 / Linux, compatible con ESPON, SDK para Android y IOS disponible.
Ancho del papel	79.5 ± 0.5 mm (ancho de impresión 72 mm)
Diámetro del papel	83mm
Grosor del papel	0.06-0.08 mm
Cortador	UNCortador uto (Opcional)
Confiabilidad de impresión	100 km

poder	DC24V / 2.5A	
Temperatura	0-45 grados C	
Humedad de contraste	10-80%	
Dimension externa	190 *145*145(Mm)	
Peso	1.60kg	
OrdenarEn g información	P / N	redescripción
	OCPP-88A-U	USB Puertocon cortador de coche
	OCPP -88A-url	TÚSB + + Serial Lan Puertocon cortador de coche
	OCPP -88A-W	wifi + USB Puertocon cortador de coche
	OCPP -88A-BU	Bluetooth + USB, con cortador de coche
	OCPP -88A-TÚ0	USB Puertosin cortador de coche
	OCPP -88A-url0	TÚSB + + Serial Lan Puertosin cortador de coche
	OCPP -88A-W0	wifi + USB Puertoconde cortador automático
	OCPP -88A-BU0	Bluetooth + USB, sin cortador automático



Unique 80mm High Speed
POS Thermal Printer
OCP-88A



CE FCC



Product Picture



Features:

Reliable with good price

Unique appearance with reliable mould



High Printing Speed up to 300mm/second;
Auto Cutter Optional;
Cord and cordless communication for options

Reliable printer head with 100km life;
Compatible with EPSON ESC/POS
commands.



Sound and light alarm supported
suitable for kitchen application;



Support multi international languages;
SDK for Android available;



Multiple interfaces available:
USB, USB+Serial, USB+LAN,
USB+Serial+LAN; and Wifi+USB,
Bluetooth+USB+LAN



Afrikaans	Arabic (Tunisia)	English (British)	French (Switzerland)	Latvian	Spanish (Costa Rica)
Albanian	Arabic (Yemen)	English (Canada)	German (Austria)	Lithuanian	Spanish (Dominican)
Arabic (Algeria)	Basque	English (Caribbean)	German (Liechtenstein)	Macedonian	Spanish (Ecuador)
Arabic (bahrain)	Belarus	English (Irish)	German (Luxembourg)	Polish	Spanish (Guatemala)
Arabic (Egypt)	Bulgarian	English (Jamaica)	German (Standard)	Portuguese (Brazil)	Spanish (Mexico)
Arabic (Iran)	Catalan	English (New Zealand)	German (Switzerland)	Portuguese (Portugal)	Spanish (panama)
Arabic (Jordan)	Chinese (Singapore)	English (South Africa)	Greek	Romanian	Spanish (Paraguay)
Arabic (Kuwait)	Chinese (Hongkong)	English (US)	Hebrew	Russian	Spanish (Peru)
Arabic (Lebanon)	Chinese (PRC)	Estonian	Hun	Serbian	Spanish (Uruguay)
Arabic (Libya)	Chinese (Taiwan)	Faroese	Icelandic	Slovak	Spanish (Venezuela)
Arabic (Morocco)	Croatian	Farsi	Indonesian	Slovenian	Thai Language
Arabic (Oman)	Czech	Finnish	Italian (Switzerland)	Swedish	Turkish
Arabic (Qatar)	Danish and Norwegian	French (Belgium)	Italian	Spanish (Argentina)	Ukrainian
Arabic (Saudi Arabia)	Dutch (Belgium)	French (Canada)	Japanese	Spanish (Bolivia)	Urdu
Arabic (Syria)	Dutch (standard)	French (Luxembourg)	Korean	Spanish (Chile)	Vietnamese
Arabic (UAE)	English (Australia)	French (Standard)	Vietnamese	Spanish (Colombia)	


Power plug for option:




How to use?

Connecting the printer:

- ▶ The power adapter cable connect to the printer power interface
- ▶ The interface cable connect on the printer port behind
- ▶ The cash drawer connecting cable connect to the printer's behind the cash drawer interface

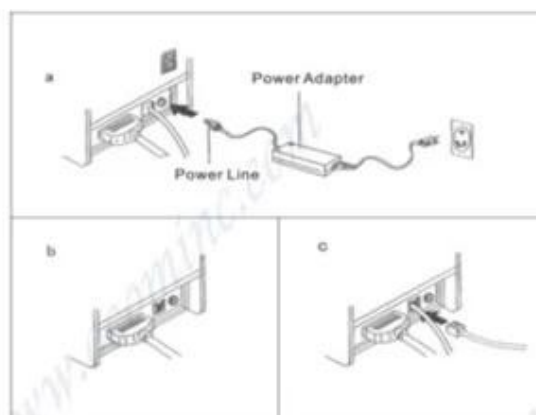



Installation of paper roll:

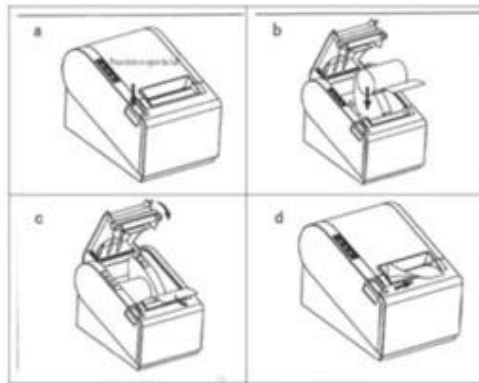

- A** Open the printer cover.
- B** Install the roller in the roll paper, and put them into the printer.
- C** Pull out some paper outside the printer and then close the printer cover.
- D** Close the top cover. Press the printer cover to avoid error position of roll paper.
- E** Tear-off the paper correctly.

Setting the Printing Mode(DIP switches):

The DIP switches are used to set the printer to perform various functions, such as cutter mode, character set, speed, beeper, print density and etc.

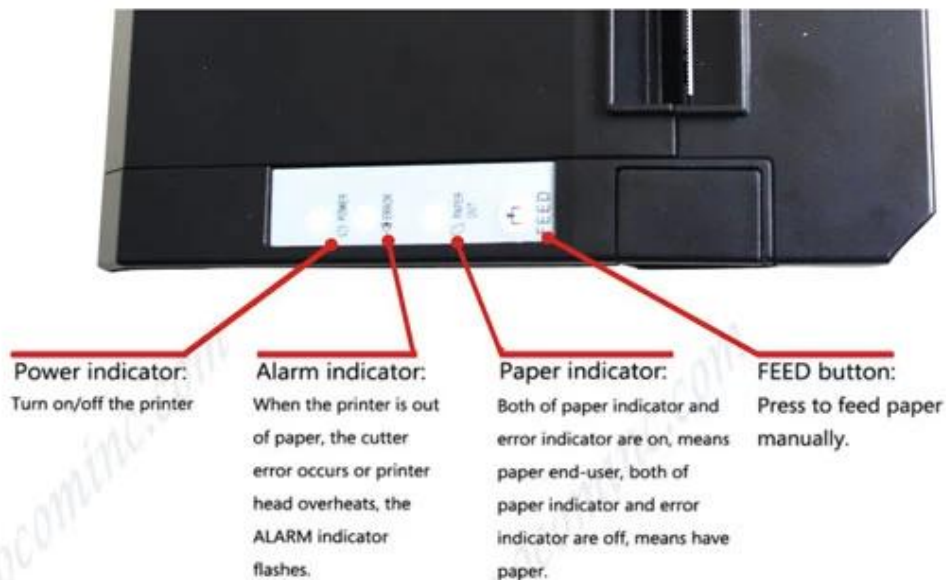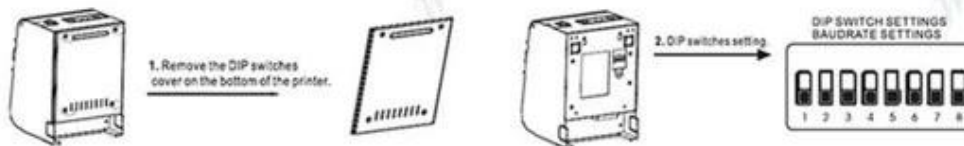

✓ Indicates information has been verified onsite by a certification specialist

Test Equipment and Facilities

Verified	Machine Name	Brand & Model No.	Quantity
✓	Ageing Tester	No Information	6
✓	Withstand Voltage Tester	CC2670A	1
✓	Oscilloscope	TBS1102	1
✓	DC Power Supply	PS-305DM	6
✓	Digital Torque Meter	HP100	1
✓	Calliper	GUANGLU	2
✓	Multi-meter	VC890D	7
✓	Test Computer	No Information	13

Verified by TUV on 2013.7.15

Certification:



Warranty and After Sales:



- ▶ All products' warranty are not less than 12 month, some models even up to 24 months warranty.
- ▶ Spare parts will be provided for mass orders for customers' local maintenance.
- ▶ Any product found to be defective within 30 days of shipment shall be deemed Dead on Arrival (DOA). DOA products will be advance replaced and shipped via express.
- ▶ Have distributors or authorized agents in the main market who can provide local repair and replacement services.
- ▶ Professional CRM management insures fast respond for customer's enquiries and orders tracking.
- ▶ Sales with many years experience in foreign trade, proficient in foreign languages and strong sense of responsibility.
- ▶ 7*24 hours online, responds with 12 hours in working days, and within 24 hours for rest days.

Packing and Shipment:



Double wall corrugated board



Double outer cartons

Marks and fragile stickers

Outer protective film



Payment:



secure payment



AliExpress

PayPal

Trade Assurance

Customers Reference

Over the years, OCOM keep efforts on marking "OCOM" as an internationally recognized brand, and we have established goods relationship with our customers and have friendly communication with each other.



Contacto&erio; ENSP; NOS

Dirección: 4 / F, bloque 10, parque industrial Zhongxing, carretera Chuangye, distrito de Nanshan, Shenzhen 518054, China;

Sitio web: www.ocominc.com, www.pos.solution.com.cn;

Email: sales07@ocominc.com, sales07@ocomtech.com.cn;

Encargado comercial: cn1000542707;

Skype: en vivo: ocom sales07;

MSN: ocomsales07@hotmail.com;

QQ: 3152989359;

Móvil / Wechat / Whatsapp: 0086.189.48778596;

Tel: 0086.755.86053207-807;

Máquina de fax: 0086.755.86053207-868;



Phoebe Hong



OCOM Technologies Limited

Add: 4/F, Block10, Zhongxing Industrial Park, Chuangye Road, Nanshan District, Shenzhen 518054, China

Tel: 0086.755.8605.3207 ext 807

Fax: 0086.755.8605.3207 ext 868

Web: www.ocominc.com

E-mail: sales07@ocominc.com, sales07@ocomtech.com.cn

Skype: ocomsales07; **MSN:** ocomsales07@hotmail.com

Ali TM: cn1000542707; **QQ:** 3152989359

Mobile/Wechat/Whatsapp: 0086.189 4877 8596



Reliable One-Stop Supplier for POS and Auto-ID Related Products