

# Lujoso 58mm Térmico Recibo Impresora

(Número de modelo: OCPP- 58C )

## 1.características:

Diseño de engranaje grande, súper resistente al desgaste  
Diseño de apariencia de moda  
Alta velocidad de impresión de hasta 120 mm / s para texto o imagen  
Completamente cCompatible con EPSON ESC / POS mando  
Larga vida, printing vida de la cabeza: 50 KM  
UNCortador uto  
Soporte NV descargar descarga de logotipo  
Support múltiples idiomas  
Soporta múltiples tipos de códigos de barras  
Soporte cajón de efectivo patear  
Soporte Win 9X / Win ME / WIN2000 / Win 2003 / Win NT / Win XP / Win Vista / Win7 / Win8

## 2.Especificación:

|                                   |  |
|-----------------------------------|--|
| <b>Método de impresión</b>        | Térmico directo  |
| <b>Densidad de impresión</b>      | 384 puntos / línea   |
| <b>Tamaño del personaje</b>       | ANK, Fuente A: 12x24dots<br>Fuente B: 9x17 puntos<br>Chino simplificado / tradicional: 24x24dots |
| <b>Código de barras</b>           | UPC-A / UPC-E / JAN13 (EAN13) / JAN8 (EAN8) / CODABAR / ITF / CODE39 / CODE93 / CODE128          |
| <b>Interfaz</b>                   | Parallmil/Serie / USB/ LAN   |
| <b>Poder suministro</b>           | corriente continua 12V==2.6UN  |
| <b>Cajón de dinero</b>            | corriente continua 12V==1A   |
| <b>Cabezal de impresión</b>       | 50 kilometros  |
| <b>Condiciones de operación</b>   | Temperatura (0 ~ 45 Deg C), humedad (10 ~ 80%)   |
| <b>Almacenamiento Condiciones</b> | Temperatura (-10 ~ 60 Deg C), humedad (10 ~ 90%)   |
| <b>Velocidad de impresión</b>     | 120 mm / s   |
| <b>Ancho del papel</b>            | 57.5±0.5mm   |
| <b>Papel diámetro externo</b>     | 65 mm  |
| <b>Grosor del papel</b>           | 0.06 ~ 0.08 mm   |
| <b>Peso</b>                       | norrey peso: 1.5KG, peso bruto: 2.5kg  |
| <b>Dimensión</b>                  | 199 * 132 * 111.5 mm   |
| <b>Conductor</b>                  | Win9X / Win ME / Win2000/ Win2003/ WinNT / Win XP/Ganar Vista/Win7/ Ganar8                       |
| <b>Cortador</b>                   | UNCortador uto   |
| <b>Mando</b>                      | Compatible con EPSON ESC / POS   |
| <b>Espaciado entre líneas</b>     | 3.75mm (puede cambiar a través del comando)  |



**58mm Thermal Printer  
with Auto-cutter and Big Gear  
OCPP-58C**



**Product Picture**





## Features

**Simple but not easy**

Fashionable appearance design





Big gear design, superwear resistant



High printing speed up to 120mm/s  
for text or image



Support multiple languages

Long life, printing head life: 50KM



## All-round show





## Application Area

Food delivery, restaurant, Traffic Citation,  
Logistics, Transportation, Warehouse management,  
Delivery, Illegal Parking Ticket, Drugstore,  
Price Tag, Retail/Farm



## Parameter

## Parameter

|                        |   |
|------------------------|---|
| Print method           | Direct thermal  |
| Print density          | 384dots/line  |
| Character size         | ANK, Font A: 12x24dots<br>Font B: 9x17dots<br>Simplified/traditional Chinese: 24x24dots |
| Bar code               | UPC-A/UPC-E/JAN13(EAN13)/JAN8(EAN8)/CODABAR/ITF/CODE39/CODE93/CODE128                   |
| Interface              | Parallel/Seris/USB/LAN  |
| Power supply           | DC 12V==2.6A  |
| Cash drawer            | DC 12V==1A  |
| Printing head lifetime | 50 kilometers   |
| Operating Conditions   | Temperature (0~45 Deg C), humidity (10~80%)   |
| Storage Conditions     | Temperature (-10~60 Deg C), humidity (10~90%)   |
| Print speed            | 120mm/s   |
| Paper width            | 57.5±0.5mm  |
| Paper                  |   |

|                   |  |
|-------------------|--|
| external diameter | 65mm   |
| Paper thickness   | 0.06~0.08mm  |
| Weight            | Net weight: 1.5KG, Gross weight: 2.5kg                         |
| Dimension         | 199*132*111.5mm  |
| Driver            | Win9X/Win ME/Win2000/Win2003/WinNT/Win XP/Win Vista/Win7/ Win8 |
| Cutter            | Auto cutter  |
| Command           | Compatible with EPSON ESC/POS                                  |
| Line Spacing      | 3.75mm(Can change through command)                             |


## Paper Roll Installation



- A Open the printer cover.
- B Install the roller in the roll paper, and put them into the printer.
- C Pull out some paper outside the printer and then close the printer cover.
- D Close the top cover. Press the printer cover to avoid error position of roll paper.



## Connection

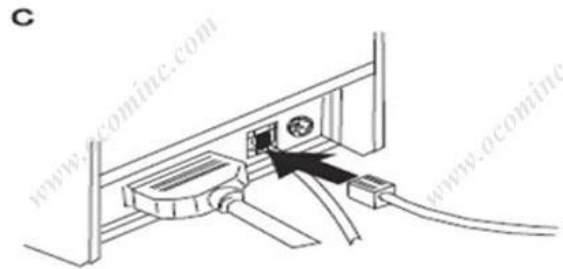

- Plug the DC cord connector into the printer's power connector..
- Plug the data cable connector into the printer's interface connector.
- Plug the drawer cable into the drawer kick-out connector on the back of the printer next to the interface connector.

## Shipping and payment

1. Air, Sea, Express(DHL, FedEx, UPS, EMS, TNT and so on)
2. EXPRESS: around 3-7 working days to arrive
3. INTERNATIONAL AIR MAIL: usually around 2-4 days to arrive, will also depend on which destination port
4. By sea: depend on which destination port
5. T/T
6. Western Union
7. Escrow

## Company Profile



OCOM Technologies Limited is a professional supplier specialized in POS and Auto-ID applications. Our products portfolio covers Barcode Scanner, Barcode Printer, Thermal Printer, Dot Matrix Printer, Magnetic Card Reader, Data Collector, POS Terminal, and other IOT products.

We have FCC, CE, RoHS, and other certifications. We have sell our products to West Europe, North American, Africa, Asia-Pacific and other countries.

OCOM has professional teams including marketing, R&D, quality control, production and sales service. All of the sales representatives have 3 to 10 years experience in international trading, which help us to meet the customers' needs.

OCOM have been sticking to the quality system of ISO9001:2008. We conduct strict IQC, IPQC and OQC inspection in every industrial procedure. Based on our strong capacity, the normal lead time for main products is about 3 to 7 days even for bulk order.

You can find more information of us at: [www.ocominc.com](http://www.ocominc.com),  
Together we quest for the best.



Contacto: Harold Hu  
OCOM Technologies Limited  
Dirección: 4 / F, bloque 10, Zhongxing Industrial Park, Chuangye Road, distrito de Nanshan, Shenzhen 518054, China;  
Sitio web: [www.ocominc.com](http://www.ocominc.com), [www.possolution.com.cn](http://www.possolution.com.cn);  
E-mail: [sales14@ocominc.com](mailto:sales14@ocominc.com);  
Skype: [sales14@ocominc.com](https://www.skype.com/people/sales14@ocominc.com)  
MSN: [ocomsales14@hotmail.com](mailto:ocomsales14@hotmail.com);  
Whatsapp: 86.18948789890;  
Wechat: 18948789890 (ocomsales14);  
Móvil: 86.18948789890;  
QQ: 1467261417;  
Tel: 0086.755.86053207-814;  
Fax: 0086.755.86053207-868.