

AndroidPDA industriel Basé
(Modèle No.:OCBS-D8000)

Fonctionnalité:

Systeme d'exploitation Android5.1;

2G RAM, 16G ROM, carte de TF peut jusqu'à à 32 Go;

ARM Cortex-A53 64bit Quad-Core 1.3GHz;

Soutien 4G LTE et 3G WCDMA;

GPS, A-GPS de positionnement par satellite;

Hd 8 millions de pixels, avec LED, mise au point automatique;

carte SIM, la carte PSAM, Micro SD (TF) Développer Port;

Rechargeable Li-polymère Option batterie 3.7V 4000mAh;

Couleur écran tactile durable de verre imitative 4.0 pouces QVGA;

Environnement étanche: IP65;

6 côtés peuvent supporter l'impact de 1.5m chute au sol en ciment.

Spécification:

Le paramètre physique	
Taille	152mm (L) x 77mm (H) x 29mm (W)
Poids	<500g
Écran d'affichage	Couleur 4.0 pouces QVGA verre imitative écran tactile durable TFT-LCD, 650000 couleurs, 480 * 800 (taille QVGA) La luminosité de rétro-éclairage LED est réglable
Développer Port	carte SIM, la carte PSAM, Micro SD (TF)
Interface de communication	USB2.0 périphérique, RS-232 (en option)
Mode d'entrée	Standard Stylus, Handwriting, touchant l'entrée d'entrée ou le clavier
Capacité de la batterie	Batterie Li-polymère batterie 3.7V 4000mAh optionnelle
La fréquence	8Ω1W haut-parleur
Clé	29pcs clé de silicone souple
Paramètre de performance	
CPU	ARM Cortex-A53 64bit Quad-Core, 1.3GHz
RAM	2G RAM
ROM flash	Standard 16G NAND Flash Storage Micro SD / TF port (Max jusqu'à 32g)
Communication de données	
WIFI	Soutien IEEE802.11b protocole / g, il faut signal sans fil efficace LAN couverture

FDD-LTE	Uplink: 1920MHZ-1980MHZ; Downlink: 2110MHZ-2170Mhz Uplink: 1710MHZ-1785MHZ; Downlink: 1805MHZ-1880MHZ Uplink: 2496MHZ-2690MHZ; Downlink: 2496MHZ-2690MHZ
WCDMA / GSM	WCDMA: Uplink: 1850MHZ-1910MHZ; Downlink: 1930MHZ-1990MHZ Uplink: 880MHZ-915MHZ; Downlink: 925MHZ-960MHZ GSM: 850MHZ, Uplink: 824MHZ-849MHZ; Downlink: 869MHZ-894MHZ 900MHZ, Uplink: 880MHZ-915MHZ; Downlink: 925MHZ-960MHZ 1800MHZ, Uplink: 1710MHZ-1785MHZ; Downlink: 1805MHZ-1880MHZ 1900MHZ, Uplink: 1850MHZ-1910MHZ; Downlink: 1930MHZ-1990MHZ
Bluetooth	Prise en charge Bluetooth 2.0 + EDR, la distance de transmission est 5-10m
Environnement d'exploitation	
Température de fonctionnement	-20 °C à 50 °C
Température de stockage	-25 °C à 70 °C
Environnement Humidité	5% RH - 95% HR (sans condensation)
Spécifications Drop	6 côtés peuvent supporter l'impact de la chute de 1.5m au sol en ciment dans la gamme la température de fonctionnement
rouleau Spécifications	1000 fois / 0.5m, rouler sur 6 côtés zone de contact
Environnement Sealed	IP65
Environnement de développement	
Système opérateur	Android5.1
SDK	kit de développement de logiciels à usage exclusif
Langue prise en charge	JAVA
Outil de développement	Éclipse
Un code à barres à une dimension collecte	
Un scanners CCD dimensionnelles	Symbole SE655
Résolution	largeur minimale 5mil
Lumière ambiante	0ft.candles-10000ft.candles
Vitesse de numérisation	50 / s
Angle de balayage	53° ± 3°
Support Type de code à barres	UPC / EAN, Bookland EAN, Code 128, Code39, Code 93, Code 11, Interleaved 2 5, Discrete 2 sur 5, Chinois 2 de5, Matrix 2 5, Inverse 1D, MSI, GS1 DataBar, etc.
Un scanner laser tridimensionnel	Mingde966 Standard, Symbole 955, HoneywellN4313 (en option)
Résolution	largeur minimale 4mil
Lumière ambiante	10000ft.candles (107640 lux)
Vitesse de numérisation	104 (±) 12 / sec (bidirectionnel)
Angle de balayage	47° ± 35° (Standard) / 35° ± 3° (angle étroit)
Support Type de code à barres	UPC / EAN, Code128, Code39, Code93, Code11, Interleaved 2 of 5, Discrete 2 sur 5, chinois 2 5, Codabar, MSI, RSS
Deux dimensions de code à barres acquisition	
CMOS Scanner	Newland 3096 Standard, HONEYWELL N3680 en option
La résolution du capteur	752 (niveau) × 480 (vertical) pels (niveau de gris)
Lumière ambiante	Tous les 9000ft.candles sombres / 96900 lux
élément Focus (VLD)	655nm ± 10nm

Soutien type de code à barres	PDF417, MicroPDF417, Composite, RSS, TLC-39, Datamatrix, QR code, Micro QR code, Aztec, MaxiCode; Codes postaux: US PostNet, américain Planet, Royaume-Uni, des postes Australian Postal, JapanPostal Néerlandais Postal (KIX) 3
RFID	
LF	125K; ISO11784 / protocole ISO11785
HF	13,56; ISO14443A / B protocole
Caméra	Hd 8 millions de pixels, avec LED, mise au point automatique
GPS	Soutenir A-GPS



Android Based Industrial PDA

OCBS-D8000




Product Picture



Features

Reliable with good price

**Android 5.1 Operating System;
Color 4.0 inch QVGA imitative glass
durable touch screen;**

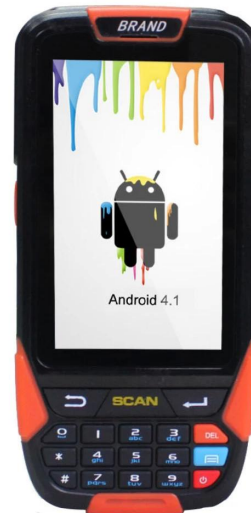

**Support 1D or 2D barcode scanning
Support wifi and bluetooth**

**FDD-LTE.WCDMA,GSM Support
A-GPS satellite positioning optipn
ARM Cortex-A53 64bit?Quad-Core 1.3GHZ**





Hd 8million pixels,with LED,
automatic focusing;
RFID Reader and writer optional

PSAM Card SIM Card, Micro SD(TF)Card Expand Port
3.7V 4000mAh Rechargeable Li-Polymer
Battery.



Sealed Environment:IP65;
6 side can bear impact from
1.5m drop to cement floor.



Application place



Bookstore



Supermarket



Pharmacy



Warehouse



Logistics



Restaurant

Parameter

Physical Parameter	
Size	152mm(L)×77mm(H)×29mm(W)
Weight	<500g
Display Screen	Color 4.0 inch QVGA imitative glass durable touch screen TFT-LCD, 650000 colors, 480*800 (QVGA size) The brightness of LED Backlight is adjustable
Expand Port	SIM card, , Micro SD (TF) Card
Communication Interface	USB2.0 Device,
Input Mode	Standard Stylus, Handwriting, touching input or keyboard input
Battery Capacity	Rechargeable Li-polymer Battery 3.7V 4000mAh Optional
Performance Parameter	
CPU	ARM Cortex-A53 64bit Quad-Core 1.3G
RAM	2G RAM
Flash ROM	Standard 16G NAND Flash Storage Micro SD/TF port (Max up to 32G)
Data Communication	
WI-FI	Support IEEE802.11b/g/n protocol, it need effective wireless LAN signal cover
FDD-LTE	Uplink: 1920MHZ-1980MHZ; Downlink: 2110MHZ-2170MHZ Uplink: 1710MHZ-1785MHZ; Downlink: 1805MHZ-1880MHZ Uplink: 2496MHZ-2690MHZ; Downlink: 2496MHZ-2690MHZ
WCDMA / GSM	WCDMA: Uplink:1850MHZ-1910MHZ; Downlink: 1930MHZ-1990MHZ Uplink:880MHZ-915MHZ; Downlink: 925MHZ-960MHZ GSM: 850MHZ, Uplink:824MHZ-849MHZ; Downlink: 869MHZ-894MHZ 900MHZ, Uplink:880MHZ-915MHZ; Downlink: 925MHZ-960MHZ 1800MHZ,Uplink:1710MHZ-1785MHZ; Downlink: 1805MHZ-1880MHZ 1900MHZ ,Uplink:1850MHZ-1910MHZ; Downlink: 1930MHZ-1990MHZ
Bluetooth	Support Bluetooth 2.0+EDR/3.0+HS/4.1+HS, transmission distance is 5-10m
Operating Environment	
Operating Temperature	—20C to 50C
Storage	—25C to 70C

Production Capacity:

✓ Indicates information has been verified onsite by a certification specialist

Production Capacity

Verified	Product Name	Production Line Capacity	Actual Units Produced(Previous Year)
✓	Thermal Printer	40,000 Sets / Month	250,000 Sets
✓	Dot Matrix Printer	15,000 Sets / Month	10,000 Sets
✓	Bluetooth Printer	30,000 Sets / Month	20,000 Sets
✓	Barcode Scanner	40,000 Sets / Month	20,000 Sets
✓	POS Machine	5,000 Sets / Month	10,000 Sets
✓	Magnetic Card Reader and Writer	45,000 Sets / Month	50,000 Sets

Verified by TUV on 2013.7.15

Quality Assurance:



OCOM is dedicated to providing most cost-effective products and services with highest quality that will meet customers' satisfaction.

Since the establishment, OCOM has been sticking strictly to the standard and requirements of ISO9001: 2000 in the processes of research, design, manufacturing and services. OCOM's products have passed CE, FCC, TUV, RoHs and other certifications.

We make strictly IQC, IPQC and OQC inspection per industrial standard. All the products must pass 24-48 hours aging test before shipment. Some designated models can have as long as 24 months warranty.

Test Equipments:

✓ Indicates information has been verified onsite by a certification specialist

Test Equipment and Facilities

Verified	Machine Name	Brand & Model No.	Quantity
✓	Ageing Tester	No Information	6
✓	Withstand Voltage Tester	CC2670A	1
✓	Oscilloscope	TBS1102	1
✓	DC Power Supply	PS-305DM	6
✓	Digital Torque Meter	HP100	1
✓	Calliper	GUANGLU	2
✓	Multi-meter	VC890D	7
✓	Test Computer	No Information	13

Verified by TUV on 2013.7.15

Certification:




Warranty and After Sales:



- ▶ All products' warranty are not less than 12 month, some models even up to 24 months warranty.
- ▶ Spare parts will be provided for mass orders for customers' local maintenance.
- ▶ Any product found to be defective within 30 days of shipment shall be deemed Dead on Arrival (DOA). DOA products will be advance replaced and shipped via express.
- ▶ Have distributors or authorized agents in the main market who can provide local repair and replacement services.
- ▶ Professional CRM management insures fast respond for customer's enquiries and orders tracking.
- ▶ Sales with many years experience in foreign trade, proficient in foreign languages and strong sense of responsibility.
- ▶ 7*24 hours online, responds with 12 hours in working days, and within 24 hours for rest days.

Packing and Shipment:

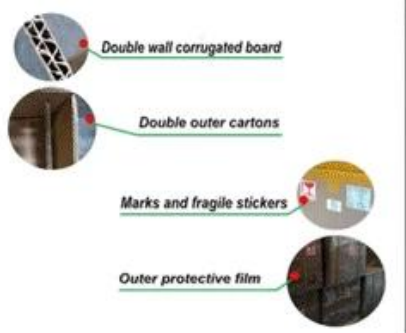

Payment:



secure payment



AliExpress

PayPal

Trade Assurance

Customers Reference

Over the years, OCOM keep efforts on marking "OCOM" as an internationally recognized brand, and we have established goods relationship with our customers and have friendly communication with each other.



Company Profile



TRADE ASSURANCE

- 100% money refund for Late shipment & Quality problem
- Guarantee on-time delivery
- Third-party pre-shipment quality inspection (Optional)
- No transaction commission charged
- The HIGHEST assurance amount guaranteed by alibaba in the Auto-ID and POS industry .



OCOM Technologies Limited is a professional supplier specialized in POS and Auto-ID applications. Our products portfolio covers , Thermal Printer, Barcode printer, Dot Matrix Printer, Barcode Scanner, Magnetic Card Reader, Data Collector, POS Terminal, and other IOT products.



We have FCC, CE, RoHS, and other certifications. We have sell our products to West Europe, North American, Africa, Asia-Pacific and other countries.

OCOM has professional teams including marketing, R&D, quality control, production and sales service. All of the sales representatives have 3 to 10 years experience in international trading, which help us to meet the customers' needs. OCOM have been sticking to the quality system of ISO9001:2008. We conduct strict IQC, IPQC and OQC inspection in every industrial procedure. Based on our strong capacity, the normal lead time for main products is about 3 to 7 days even for bulk order.

You can find more information of us at: www.ocominc.com,

Together we quest for the best.



Why you choose us?



Contact us

Any queries, please contact us immediately, big surprise is waiting for you.

Sales Center:

Address: Unit701, Block 14, Zhongxing Industrial Park, Chuangye Road, Nanshan District, Shenzhen 518054, China

Website: www.ocominc.com www.possolution.com.cn;

E-mail: ocom@ocominc.com, info@possolution.com.cn ;

Tel: +86.755.86053207 ext 800;

Fax: +86.755.86053207 ext 868;

QQ: 2485890637, 190852203;

Wechat: szocominc, hj34924238;

Whatsapp: 008613352932860;



Documents pertinents:

*[OCBS-D8000 CD](#)

