

Wireless 2D BarcodeScanner (Μοντέλο: OCBs-W229)

Προδιαγραφές:

Φυσικός Χαρακτηριστικά			
Διαστάσεις:	97.3mmL x x 60.3mmW 181mmH		
Βάρος:	175g (χωρίς καλώδιο)		
Μήκος καλωδίου:	1.8m		
Τάση και Ρεύμα:	5 + / -10% VDC @ 350 mA		
Επίδοση Χαρακτηριστικά			
Πηγή φωτός:	Στοχεύοντας: 528 nm LED? φωτισμός: 630 nm LED		
Οπτικό πεδίο:	34 ° V x 46 ° H (x Κάθετη Οριζόντια)		
Roll / Pitch / εκτροπής:	360 °, ± 65 °, ± 60 °		
Σάρωση Απόδοση:	Βάθος κατατεθεί (από το πρόσωπό του κινητήρα)		
	Lable 1D ensity	TD3000	
	Ετικέτα Χαρτί	Αγγλικά	Μετρικός
	13mil (100% UPC / EAN)	1,2 - 8,0 σε	3.0-20,5 εκατοστά
	20 εκατ. (Κωδικός 39)	1,2 - 12,0 σε	3.0-30,5 εκατοστά
	PDF417 (10mil)	2.0-6.0 σε	5.0-15,5 εκατοστά
	Μήτρα δεδομένων (10mil)	2.1-6.0 σε	5.2-15,5 εκατοστά
Δυνατότητα Συμβολογία Decode			
1-D:	UPC / EAN και με συμπληρωματικό, Code 39, Κωδικός 39 Πλήρης ASCII, Tri-οπτικών Code 39, παραλλαγές RSS, UCC / EAN 128, Code 128, Κωδικός 128 Full ASCII, Code 93, Coda bar (NW1), Interleaved 2 of 5, Διακριτά 2 5, MSI, Codell, IATA, Bookland EAN, Code 32		
PDF417 (και παραλλαγές):	PDF417, microPDF417 και σύνθετων κωδικών		
Ταχυδρομικός Κώδικας:	HΠΑ Postnet και Planet, Ηνωμένο Βασίλειο, Ιαπωνία, Αυστραλίας, και η ολλανδική		
2-Δ:	MaxiCode, DataMatrix (ECC 200), και το QR Code		
Αντίθεση εκτύπωσης:	25% ελάχιστη ανάκλαση		
Πρόταση Ανοχές:	Οριζόντια ταχύτητα: 2 ίντσες (5 cm) ανά δεύτερος		
Διεπαφές που υποστηρίζονται:	RS-232C (Standard, Nixdorf, ICL, και Fujitsu)? USB (Standard, IBM SurePOS, Macintosh) και συνδεσιμότητα Synapse επιτρέπει τη σύνδεση με όλα τα παραπάνω καθώς και πολλές μη τυποποιημένων διασυνδέσεις.		
Χαρακτηριστικά απεικόνισης			
Εικόνας (Pixel):	0.30 Megapixel 640 pixels H x 480 pixels V		
Format Graphics Υποστήριξη:	Εικόνες μπορούν να εξαχθούν ως Bitmap, JPEG, και Καβγαδάκι		
Ανάγνωση Dist:	3 έως 35cm (ανάλυση εξαρτάται)		
Μεταφορά εικόνας Ταχύτητα:	USB 1.1: Έως 12 Megabits/secondRS232: Έως έως 115 kb ρυθμού baud		
Χρόνος μεταφοράς εικόνας:	Τυπική εφαρμογή USB είναι ~ 0,2 δευτερόλεπτα με ένα συμπιεσμένο Jpeg 100 kb		
Ασύρματη Παράμετρος			
Συχνότητα	433MHz	Bluetooth	
Comm. Dist	800m στο πεδίο	10M/100M	
Κανάλι	64 κανάλια αυτόματο διακόπτη	/	
comm. πρωτόκολλο	USB-HID, USB-COM	/	
Baud Rate	1.2K έως 38.4k (προεπιλογή: 9.6kbit / s)	/	
Offline αποθήκευσης	Μνήμης 8MB		
Ρεύμα κορυφής	435mA		
Κατανάλωση ρεύματος	525mA		
Idle Current	66mA		
Μπαταρία	Li-ion 2400mAh		
Ώρες εργασίας	> = 4 ώρες		
Δύναμη			
Τάση	5VDC + -10% VDC		
Ρεύμα κορυφής	435mA		
Idle Current	67mA		
Περιβάλλον χρήστη			
Θερμοκρασία λειτουργίας:	14 ° έως 122 ° F / -10 ° έως 50 ° C		
Θερμοκρασία αποθήκευσης:	-40 ° έως 158 ° F / -40 ° έως 70 ° C		
Υγρασία:	5% έως 95%, χωρίς συμπύκνωση		
Drop / Σοκ Προδιαγραφές:	Αντέχει 2000g σε συγκεκριμένες		
Ambient Light Ασυλία:	Ανοσία σε κανονική τεχνητό εσωτερικούς και φυσική εξωτερική (άμεσο ηλιακό φως) φωτισμό.		
Διαταγή των πληροφοριών:			
OCBs-W229-R-b	433MHZ Wireless 2D Barcode Scanner, Μαύρο Χρώμα		
OCBs-W229-R-w	433MHZ Wireless 2D Barcode Scanner, Λευκό Χρώμα		
OCBs-W229-B-b	Bluetooth Wireless 2D Barcode Scanner, μαύρο χρώμα, χωρίς δέκτη		
OCBs-W229-B-w	Bluetooth Wireless 2D Barcode Scanner, Λευκό Χρώμα, χωρίς δέκτη		

Λεπτομέρειες:



**433 MHz/Bluetooth
Wireless 2D Barcode Scanner
OCBS-W229**



Product Picture





||| Features

Simple but not easy

433Mhz wireless or
standard bluetooth optional;



High resolution scanning: 3.0 Megapixel



Impressive Decoding Rate of 60 times/s Speed;
Depth of Field:3cm~35cm(resolution dependent);



Multiple Interface support: RS-232C; USB2.0;



Durable construction:2.5m shock resistant,
Light weight 175g;

Variety Of Applicable Industry:
Supermarket, medical care,
finance,postal,warehouse,etc;



||| All-round show





Parameter

Physical Characteristics			
Dimensions:	97.3mmLx60.3mmWx181mmH		
Weight:	175g(without cable)		
Cable length:	1.8m		
Voltage and Current:	5 +/-10%VDC @ 350 mA		
Performance Characteristics			
Light Source:	Aiming: 528 nm LED; illumination: 630 nm LED		
Field of View:	34° V x 46° H(Vertical x Horizontal)		
Roll / Pitch / Yaw:	360°, ±65°, ±60°		
Scan Performance:	Depth of field(from engine face)		
	Table 1D ensity	TD3000	
	Paper Label	English	Metric
	13mil (100% UPC/EAN)	1.2-8.0 in	3.0-20.5cm
	20mil (Code 39)	1.2-12.0 in	3.0-30.5cm
	PDF417(10mil)	2.0-6.0 in	5.0-15.5cm
	Data matrix(10mil)	2.1-6.0 in	5.2-15.5cm

Symbology Decode Capability		
1-D:	UPC/EAN and with supplemental, Code 39, Code 39 Full ASCII, Tri-optic Code 39, RSS variants, UCC/EAN 128, Code 128, Code 128 Full ASCII, Code 93, Coda bar (NW1), Interleaved 2 of 5, Discrete 2 of 5, MSI, Codell, IATA, Bookland EAN, Code 32	
PDF417 (and Variants):	PDF417, microPDF417 and composite codes	
Postal:	U.S. Post net and Planet, U.K., Japan, Australian, and Dutch	
2-D:	Maxi Code, DataMatrix (ECC 200), and QR Code	
Print Contrast:	25% minimum reflectance	
Motion Tolerances:	Horizontal velocity: 2 in. (5 cm) per second	
Interfaces Supported:	RS-232C (Standard, Nixdorf, ICL, and Fujitsu); USB (Standard, IBM SurePOS, Macintosh) and Synapse connectivity allows for connectivity to all of the above plus many non-standard interfaces.	
Imaging Characteristics		
Image (Pixels):	0.30 Megapixel 640 pixels H x 480 pixels V	
Graphics Format Support:	Images can be exported as Bitmap, Jpeg, and Tiff	
Reading Dist:	3 to 35cm(resolution dependent)	
Image Transfer Speed:	USB 1.1: Up to 12 Megabits/second RS232: Up to 115 kb baud rate	
Image Transfer Time:	Typical USB application is ~ 0.2 seconds with a compressed Jpeg of 100 kb	
Wireless Parameter		
Frequency	433MHz	Bluetooth
Comm. Dist	800m in the field	10m/100m
Channel	64 channels auto switch	/
comm. protocol	USB-HID, USB-COM	/
Baud Rate	1.2k to 38.4k(default:9.6kbit/s)	/
Offline Storage	8MB memory	
Peak Current	435mA	
Current consumption	525mA	
Idle Current	66mA	
Battery	Li-ion 2400mAH	
Working Hours	>= 4hrs	
Power		
Voltage	5VDC+-10%VDC	
Peak Current	435mA	

Idle Current	67mA
User Environment	
Operating Temperature:	14° to 122° F / -10° to 50° C
Storage Temperature:	-40° to 158° F / -40° to 70° C
Humidity:	5% to 95%, non-condensing
Drop/Shock Specifications:	Withstand 2000g to concrete
Ambient Light Immunity:	Immune to normal artificial indoor and natural outdoor (direct sunlight) lighting.
Ordering Information:	
OCBS-W229-R-b	433MHZ Wireless 2D Barcode Scanner, Black Color
OCBS-W229-R-w	433MHZ Wireless 2D Barcode Scanner, White Color
OCBS-W229-B-b	Bluetooth Wireless 2D Barcode Scanner, Black Color
OCBS-W229-B-w	Bluetooth Wireless 2D Barcode Scanner, White Color

Production Line





Capacity

Verified	Product Name	Production Line Capacity	Actual Units Produced(Previous Year)
✓	Thermal Printer	40,000 Sets / Month	250,000 Sets
✓	Dot Matrix Printer	15,000 Sets / Month	10,000 Sets
✓	Bluetooth Printer	30,000 Sets / Month	20,000 Sets
✓	Barcode Scanner	40,000 Sets / Month	20,000 Sets
✓	POS Machine	5,000 Sets / Month	10,000 Sets
✓	Magnetic Card Reader and Writer	45,000 Sets / Month	50,000 Sets

✓ Indicates information has been verified onsite by TUV on 2013.7.15

Quality Assurance

OCOM is dedicated to providing most cost-effective products and services with highest quality that will meet customers' satisfaction.



Since the establishment, OCOM has been sticking strictly to the standard and requirements of ISO9001: 2000 in the processes of research, design, manufacturing and services. OCOM's products have passed CE, FCC, TUV, RoHS and other certifications.

We make strictly IQC, IPQC and OQC inspection per industrial standard. All the products must pass 24-48 hours aging test.

standard. All the products must pass 2440 hours aging test before shipment. Some designated models can have as long as 24 months warranty.

Test Equipments


Verified	Machine Name	Brand & Model No.	Quantity
✓	Ageing Tester	No Information	6
✓	Withstand Voltage Tester	CC2670A	1
✓	Oscilloscope	TBS1102	1
✓	DC Power Supply	PS-305DM	6
✓	Digital Torque Meter	HP100	1
✓	Calliper	GUANGLU	2
✓	Multi-meter	VCB90D	7
✓	Test Computer	No Information	13

✓ Indicates information has been verified onsite by TUV on 2013.7.15

Certifications



Packing and Shipment

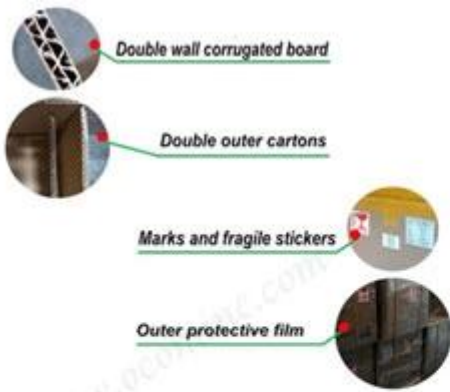

Payment




Customers Reference

Over the years, OCOM keep efforts on marking "OCOM" as an internationally recognized brand, and we have established goods relationship with our customers and have friendly communication with each other.



Why you choose us?



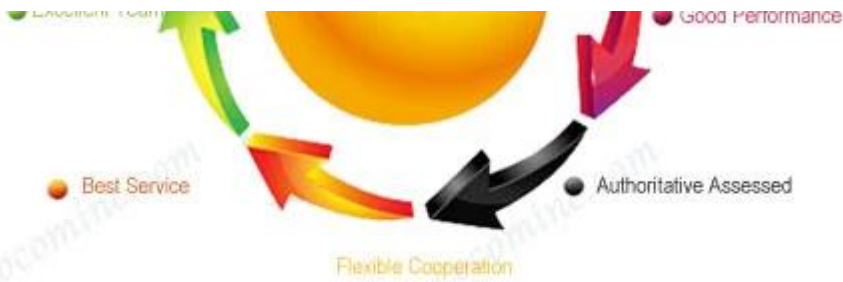

Company Profile

This Assessed Supplier Has Been
Independently Verified

Build Your Growth On Trust



TÜVRheinland®
Precisely Right.



OCOM Technologies Limited founded in 2007, it is one of leading suppliers of POS and Auto-ID related products from China.

OCOM's products portfolio covers Thermal Printer, Dot Matrix Printer, Barcode Printer, Barcode Scanner, Magnetic Card Reader, POS Terminal, and POS peripherals. Our products have passed CE, FCC, RoHS and other required certificates, and hot selling in Europe, Australia, Asia, and other area.

OCOM has a professional teams including marketing, R&D, quality control, production and sales service. The management members have worked in the FORTUNE 500 companies as senior managers for many years, All of the sales have more than 5 years' experience, which help us to meet and exceed the customers' satisfaction.

OCOM has been sticking to the quality system of ISO9001:2008. We make strictly IQC, IPQC and OQC inspection per industrial standard. All the products must pass 24-48 hours aging test before shipment. Some designated models can have as long as 24 months warranty. We have the mass production capabilities that produce thousands of printers and scanners a week. Based on our strong capacity, the normal lead time for main products is about 3 to 7 days even for bulk order.

"Integrity based, Strive for excellence, Win-win cooperation". We would like establish stable and reliable partnerships with customers all over the world. OEM/ODM is welcome.



Contact us

Any queries, please contact us immediately, big surprise is waiting for you.

Sales Center:

Address: Unit 701, Block 14, Zhongxing Industrial Park, Chuangye Road, Nanshan District, Shenzhen 518054, China;

Websites: <http://www.thermalprinter.com.cn> ; <http://ocomtech.com.cn> ;

E-mail: ocom@ocominc.com , ocomtech@gmail.com ;

Skype: [ocominc2000](https://www.skype.com/name/ocominc2000), [ocominc](https://www.skype.com/name/ocominc);

MSN: ocomtech@hotmail.com, ocominc@hotmail.com;

Trademanager: [szocominc, cn1500439666](https://www.trademanager.com/cn1500439666);

QQ: 2485890637, 190852203;

Tel/Fax: +86.755.8605.3207.



Σχετικά έγγραφα:

Θέλετε να μάθετε περισσότερα inf προϊόνormation; Παρακαλώ Κάντε κλικ εδώ. 

[Προσδιορισμός](#)