

4 Inches Direct Thermal / Thermal Transfer Bar Code Label Printer

(M/N:OCBP-016)



Features:

Stylish design and smooth surface;

Thermal Transfer / Direct Thermal;

Support multiple material printing;

Ribbon roll capacity 300m(Outer roll ribbon);

Print speed up to 127mm/s;

Various Detection Functions: open cover detection, high temperature detection, out of paper detection.

Specification

| | |
|------------------------------|--|
| General | |
| Model | OCBP-016 |
| Material | White plastic housing |
| Interface | USB |
| Processor | 32-bit CPU |
| Memory | 8MB Flash Memory, 8MB SDRAM |
| Printer Head life | 30KM |
| Power supply | Input[]AC 100V-240V,50-60Hz,Output[]DC 24V/2.5A |
| Sensors | Gap sensor,Blackmark sensor, Case-opening sensor,Ribbon sensor |
| Gap height | 2mm Min |
| Blackmark height | 2mm Min |
| Font and barcode rotation | 0°,90°,180°,270° |
| Compatible command | TSPL EPL ZPL DPL |
| Printing capability | |
| Printing method | Thermal Transfer / Direct Thermal |
| Resoluiton | 203 DPI |
| Print speed | 127mm/s |
| Print width | 104mm Max |
| Print length | 1778mm Max |
| Barcode and character | |
| Barcode | 1D barcode: Code 39, Code 93, Code 128UCC, Code 128 subsets A, B, C, Codabar, Interleaved 2 of 5, EAN-8,EAN-13,EAN-128, UPC-A, UPC-E, EAN and UPC 2(5) digits add-on, MSI, PLESSEY, POSTNET, China POST,GSI databar,Code11 2D barcode: PDF-417, Maxicode, DataMatrix, QR code[]Aztec |
| Media | |
| Media type | Continuous, gap, blackmark,folded and punched hole |
| Media width | 25.4-118mm |
| Media thickness | 0.06-0.254mm |
| Label roll capacity | 127 mm OD (outside wound) |
| Label length | 10-1778mm |
| Ribbon length | 300M |
| Ribbon width | 110mm |
| Physical | |
| Dimension | 282mm(W)× 232 mm(H)× 171 mm(D) |
| Weight | Net:2.9kg Gross: 3.9kg |
| Package box | 410*270*225mm |

| | |
|-------------------------------|--|
| 6 in 1 carton | 570*425*480mm/17.05kg |
| Environment | |
| Working temperature& humidity | 0 to 45 degrees centigrade, 10%~80% No condensation |
| Storage temperature& humidity | -20 to 60 degrees centigrade , 10%~90% No condensation |












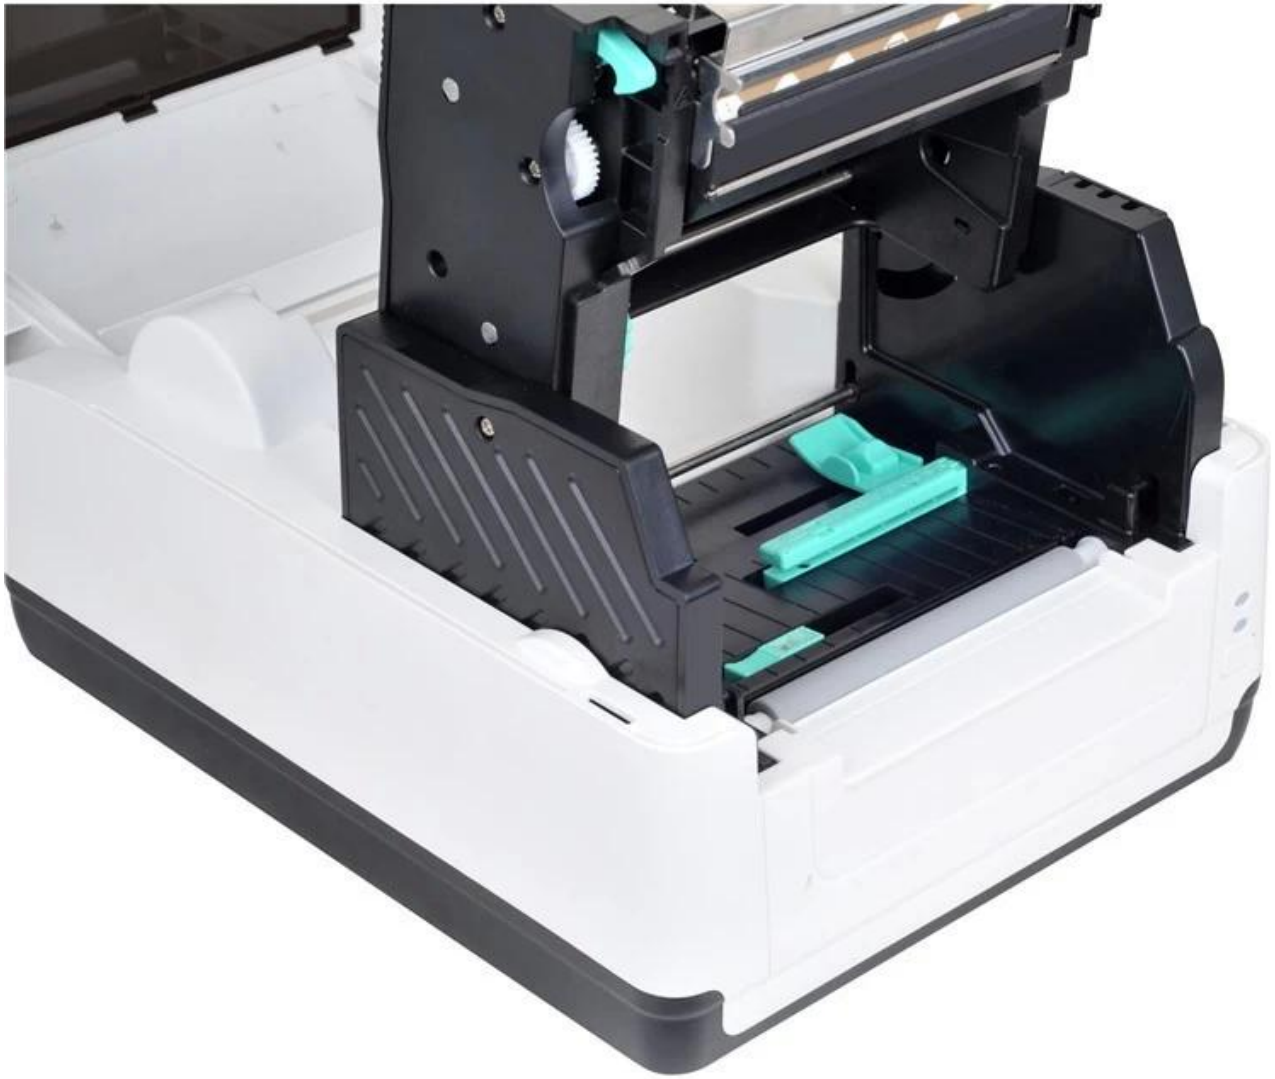













Relevant documents:

[OCBP-016 Diagnostic Tool](#)

[OCBP-016 Label Making Software](#)

[OCBP-016 Windows Driver](#)

