11.6 Inch Windows Touch Screen POS System with Printer, Scanner, Display, RFID and MSR

(M/N:POS-M1106-W)

The Android version for optional, click here for more details!

Features:

Windows 7 Beta System;

J1900 Quad-core 1.99GHz processor;

4G RAM and 64G SSD;

11.6 Inch High-definition color screen;

Standard 1366*768 resolution, can up to 1080P;

Support 58/80mm thermal printer built in;

Can optional 5200 mAh large capacity battery;

Can optional VFD LCD display MSR,RFID,1/2D Barcode Scanner.

Application area

Catering: hotel, restaurant, fast-food restaurant, coffee shop, bakery and cake shop

Retailer: Business Street, boutique, department store, cosmetics shop and high-class barbershop

Recreation: sauna, spa, night club, theme park, casino and point of sales for lottery ticket


Commercial: information management terminals for parking lot, inn, aviation, subway, and station

Specification

| Processor | J1900 Quad-core 1.99GHz processor |
|----------------------|--|
| OS | Win 7 Beta, can optional Win 10 Beta |
| Memory | 4G RAM+ 64G SSD |
| Display | 11.6 Inch High-definition color screen |
| Resolution | 1366*768, (can up to 1920*1080P) |
| Touch Screen | Ten-point capacitive touch screen |
| Printer | 58mm(no cutter) or 80mm(auto cutter) thermal printer |
| Magnetic Card Reader | ISO7811 1/2/3 Tracks, Support Dual-swiping(Optional) |
| RFID Card Reader | ISO14443TypeA, (Optional) |
| Barcode Scanner | 1D/2D barcode decoding (Optional) |
| Pole display | LCD /VFD display (Optional) |
| Wi-Fi | 802.11b/g/n |
| USB | 5*USB2.0, |
| RJ11 | 2*RJ11 |
| LAN | 1*RJ45 port,100/1000 SELF-ADAPTION |
| RS232 | 1*RS232,(can tp to 3 RS232 prot) |
| Power | DC12V,5A |

| Battery | 5200mAh (Optional, Standard product does not contain a battery) |
|---------------------|---|
| Working environment | Working temperature: -10 °C \sim 50 °C Storage temperature: -20 °C \sim 60 °C Relative humidity: 10%[]90% |



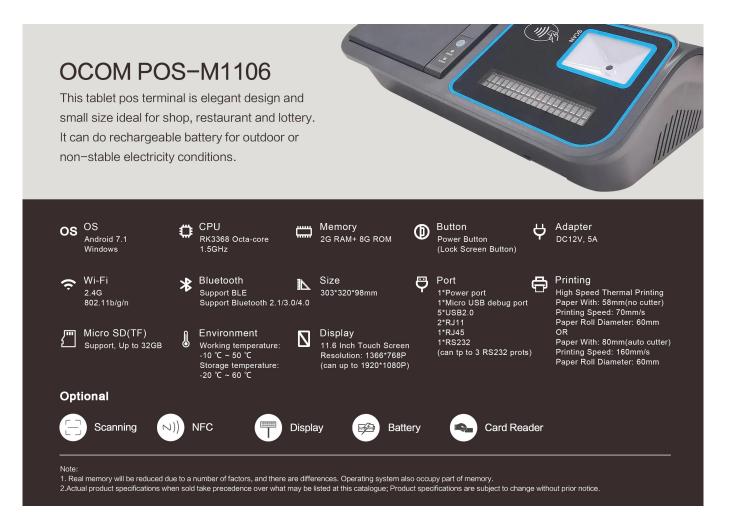



POS-M1106-W













































Relevant documents:

POS-M1106 SPEC

POS-M1106 SDK