11.6 Inch Windows Touch Screen POS System with Printer, Scanner, Display, RFID and MSR

(M/N:POS-M1106-W)

The Android version for optional, click here for more details!

Features:

Windows 7 Beta System;

J1900 Quad-core 1.99GHz processor;

4G RAM and 64G SSD;

11.6 Inch High-definition color screen;

Standard 1366*768 resolution, can up to 1080P;

Support 58/80mm thermal printer built in;

Can optional 5200 mAh large capacity battery;

Can optional VFD LCD display MSR,RFID,1/2D Barcode Scanner.

Application area

Catering: hotel, restaurant, fast-food restaurant, coffee shop, bakery and cake shop

Retailer: Business Street, boutique, department store, cosmetics shop and high-class barbershop

Recreation: sauna, spa, night club, theme park, casino and point of sales for lottery ticket

Commercial: information management terminals for parking lot, inn, aviation, subway, and station

Specification

Processor	J1900 Quad-core 1.99GHz processor
OS	Win 7 Beta, can optional Win 10 Beta
Memory	4G RAM+ 64G SSD
Display	11.6 Inch High-definition color screen
Resolution	1366*768, (can up to 1920*1080P)
Touch Screen	Ten-point capacitive touch screen
Printer	58mm(no cutter) or 80mm(auto cutter) thermal printer
Magnetic Card Reader	ISO7811 1/2/3 Tracks, Support Dual-swiping(Optional)
RFID Card Reader	ISO14443TypeA, (Optional)
Barcode Scanner	1D/2D barcode decoding (Optional)
Pole display	LCD /VFD display (Optional)
Wi-Fi	802.11b/g/n
USB	5*USB2.0,
RJ11	2*RJ11
LAN	1*RJ45 port,100/1000 SELF-ADAPTION
RS232	1*RS232,(can tp to 3 RS232 prot)
Power	DC12V,5A

Battery	5200mAh (Optional, Standard product does not contain a battery)
Working environment	Working temperature: -10 °C ~ 50 °C
	Storage temperature: -20 °C ~ 60 °C
	Relative humidity: 10%⊓90%



OCOM POS-M1106

This tablet pos terminal is elegant design and small size ideal for shop, restaurant and lottery. It can do rechargeable battery for outdoor or non-stable electricity conditions.



os os Android 7.1 Windows

CPU RK3368 Octa-core 1.5GHz

Memory 2G RAM+ 8G ROM

Button **(D)** Power Button (Lock Screen Button) Adapter DC12V, 5A

 Wi-Fi
 2.4G 802.11b/g/n **≯** Bluetooth Support BLE
Support Bluetooth 2.1/3.0/4.0

Working temperature: -10 °C ~ 50 °C Storage temperature: -20 °C ~ 60 °C

Environment

Size 303*320*98mm

Display

Port 1*Power port 1*Micro USB debug port 5*USB2.0 2*RJ11 1*RJ45 1*RS232 (can tp to 3 RS232 prots) Printing High Speed Thermal Printing Paper With: 58mm(no cutter) Printing Speed: 70mm/s Paper Roll Diameter: 60mm OR

Paper With: 80mm(auto cutter) Printing Speed: 160mm/s
Paper Roll Diameter: 60mm

Micro SD(TF)

Support, Up to 32GB



Optional



NFC



Display



11.6 Inch Touch Screen Resolution: 1366*768P (can up to 1920*1080P)

Battery



Card Reader

- 1. Real memory will be reduced due to a number of factors, and there are differences. Operating system also occupy part of memory.

 2. Actual product specifications when sold take precedence over what may be listed at this catalogue; Product specifications are subject to change without prior notice.












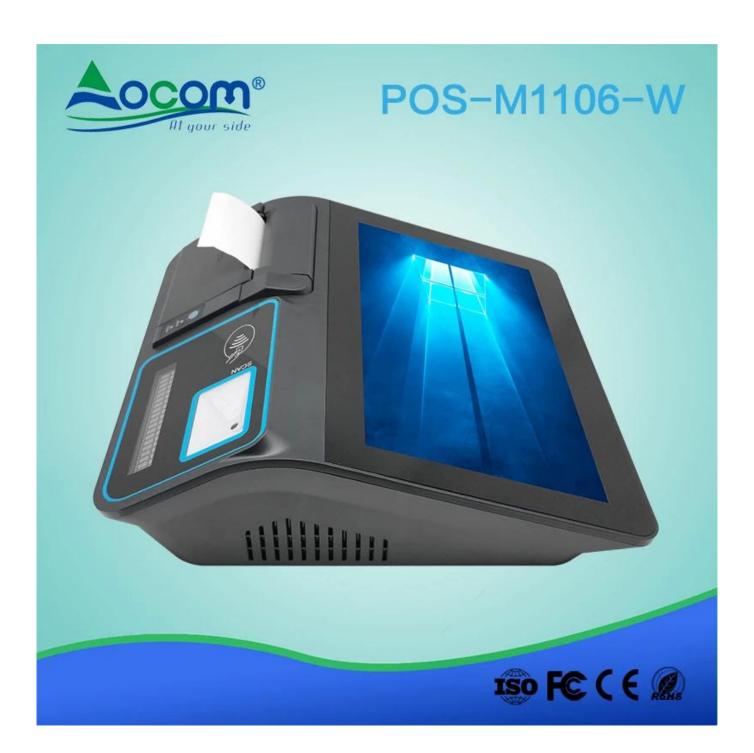
















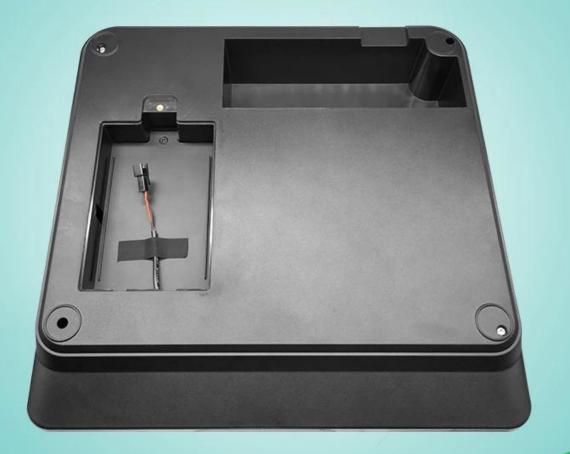





Relevant documents:

POS-M1106 SPEC

POS-M1106 SDK