

androideSulla base PDA industriale

(Modello No.:OCBS-D8000)

caratteristica:

Android5.1 sistema di funzionamento;

2G RAM, 16G ROM, carta di TF può fino a32 GB;

ARM Cortex-A53 a 64 bit Quad-Core 1.3GHz;

Supporto 4G LTE e WCDMA 3G;

GPS, posizionamento satellitare A-GPS;

HD 8 milioni di pixel, con LED, messa a fuoco automatica;

SIM card, carta PSAM, Micro SD (TF) Expand Port;

Batteria ricaricabile Li-polimero di 3.7V 4000mAh opzione;

A colori touch resistente schermo di vetro imitativo QVGA da 4.0 pollici;

Ambiente sigillato: IP65;

6 lati possono sopportare impatti da goccia 1,5 m al pavimento di cemento.

Specifica:

parametro fisico	
Dimensione	152 millimetri (L) × 77 millimetri (H) x 29 millimetri (W)
Peso	<500g
Schermo	touch screen resistente a colori 4.0 pollici QVGA vetro imitativo TFT-LCD, 650000 colori, 480 * 800 (formato QVGA) La luminosità della retroilluminazione a LED è regolabile
Expand Port	SIM card, carta PSAM, Micro SD (TF)
Interfaccia di comunicazione	Dispositivo USB 2.0, RS-232 (opzionale)
Modalità di immissione	Standard Stylus, scrittura a mano, toccando Ingresso o la tastiera
Capacità della batteria	Batteria ricaricabile Li-polimero di 3.7V 4000mAh opzionale
Frequenza	altoparlante 8Ω1W
Chiave	tasto soft silicone 29pcs
parametro di performance	
processore	ARM Cortex-A53 a 64 bit Quad-Core, 1,3 GHz
RAM	2G RAM
Flash ROM	16G NAND Flash Storage standard Micro SD / TF porta (max fino a 32G)
Comunicazione dei dati	
WI-FI	Supporto IEEE802.11b / g protocollo, è necessario segnale LAN wireless efficace copertina
FDD-LTE	Uplink: 1920MHZ-1980MHZ; Downlink: 2110MHZ-2170MHZ Uplink: 1710MHZ-1785MHZ; Downlink: 1805MHZ-1880MHZ Uplink: 2496MHZ-2690MHZ; Downlink: 2496MHZ-2690MHZ

WCDMA / GSM	WCDMA: Uplink: 1850MHZ-1910MHZ; Downlink: 1930MHZ-1990MHZ Uplink: 880MHZ-915MHZ; Downlink: 925MHZ-960MHZ GSM: 850MHZ, Uplink: 824MHZ-849MHZ; Downlink: 869MHZ-894MHZ 900MHZ, Uplink: 880MHZ-915MHZ; Downlink: 925MHZ-960MHZ 1800MHZ, Uplink: 1710MHZ-1785MHZ; Downlink: 1805MHZ-1880MHZ 1900MHZ, Uplink: 1850MHZ-1910MHZ; Downlink: 1930MHZ-1990MHZ
Bluetooth	Supporto Bluetooth 2.0 + EDR, distanza di trasmissione è 5-10m
Ambiente operativo	
temperatura di esercizio	-20 °C a 50 °C
Temperatura di conservazione	-25 °C a 70 °C
Umidità dell'ambiente	5% RH - 95% RH (senza condensa)
Specifiche di caduta	6 lati possono sopportare impatti da goccia 1,5 m al pavimento di cemento della gamma della temperatura di funzionamento
rotolo Specifiche	1000 volte / 0.5m, rotolo su 6 lati area di contatto
ambiente sigillato	IP65
Sviluppo dell'ambiente	
Sistema operativo	Android5.1
SDK	kit di sviluppo software uso esclusivo
Lingua supportati	GIAVA
Strumento di sviluppo	Eclisse
Un codice a barre monodimensionali collezionare	
Uno scanner CCD dimensionali	Symbol SE655
Risoluzione	larghezza minima 5mil
Luce ambientale	0ft.candles-10000ft.candles
Velocità di scansione	50 / sec
Angolo di scansione	53° ± 3°
Tipo di supporto di codice a barre	UPC / EAN, Bookland EAN, Code 128, Code39, Code 93, Code 11, Interleaved 2 su 5, Discrete 2 di 5, cinese 2 di 5, Matrix 2 di 5, Inverse 1D, MSI, Gs1 DataBar, ecc
Uno scanner laser tridimensionale	Mingde966 standard, Simbolo 955, HoneywellN4313 (per facoltativo)
Risoluzione	larghezza minima 4mil
Luce ambientale	10000ft.candles (107640 lux)
Velocità di scansione	104 (±) 12 / sec (Entrambe)
Angolo di scansione	47° ± 35° (standard) / 35 ° ± 3 ° (angolo stretto)
Tipo di supporto di codice a barre	UPC / EAN, Code128, Code39, Code93, Code11, Interleaved 2 of 5, Discrete 2 su 5, cinese 2 di 5, Codabar, MSI, RSS
codice a barre bidimensionale acquisizione	
CMOS Scanner	Newland 3096 standard, HONEYWELL N3680 per facoltativo
La risoluzione del sensore	752 (livello) × 480 Pels (verticale) (livello di grigio)
Luce ambientale	Tutti 9000ft.candles scuri / 96900 lux
elemento di messa a fuoco (VLD)	655nm ± 10nm
Supporto tipo di codice a barre	PDF417, MicroPDF417, Composito, RSS, TLC-39, Datamatrix, QR code, Micro QR code, Aztec, MaxiCode; Codici postali: US PostNet, Stati Uniti Planet, Regno Unito postali, Australiano postale, JapanPostal olandese postale (KIX) 3
RFID	
LF	125K; ISO11784 / protocollo ISO11785
HF	13,56; ISO14443A / B protocollo
macchina fotografica	HD 8 milioni di pixel, con LED, messa a fuoco automatica
GPS	Supporto A-GPS



Android Based Industrial PDA

OCBS-D8000




Product Picture



Features

Reliable with good price

**Android 5.1 Operating System;
Color 4.0 inch QVGA imitative glass
durable touch screen;**

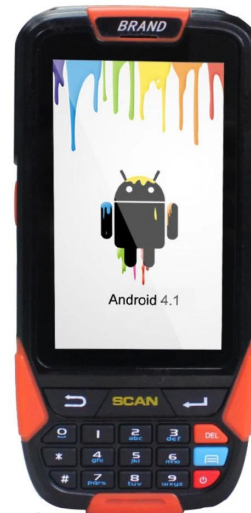

**Support 1D or 2D barcode scanning
Support wifi and bluetooth**

**FDD-LTE.WCDMA,GSM Support
A-GPS satellite positioning optipn
ARM Cortex-A53 64bit?Quad-Core 1.3GHZ**





Hd 8million pixels,with LED,
automatic focusing;
RFID Reader and writer optional

PSAM Card SIM Card, Micro SD(TF)Card Expand Port
3.7V 4000mAh Rechargeable Li-Polymer
Battery.



Sealed Environment:IP65;
6 side can bear impact from
1.5m drop to cement floor.



Application place



Bookstore



Supermarket



Pharmacy



Warehouse



Logistics



Restaurant

Parameter

Physical Parameter	
Size	152mm(L)×77mm(H)×29mm(W)
Weight	<500g
Display Screen	Color 4.0 inch QVGA imitative glass durable touch screen TFT-LCD, 650000 colors, 480*800 (QVGA size) The brightness of LED Backlight is adjustable
Expand Port	SIM card, , Micro SD (TF) Card
Communication Interface	USB2.0 Device,
Input Mode	Standard Stylus, Handwriting, touching input or keyboard input
Battery Capacity	Rechargeable Li-polymer Battery 3.7V 4000mAh Optional
Performance Parameter	
CPU	ARM Cortex-A53 64bit Quad-Core 1.3G
RAM	2G RAM
Flash ROM	Standard 16G NAND Flash Storage Micro SD/TF port (Max up to 32G)
Data Communication	
WI-FI	Support IEEE802.11b/g/n protocol, it need effective wireless LAN signal cover
FDD-LTE	Uplink: 1920MHZ-1980MHZ; Downlink: 2110MHZ-2170MHZ Uplink: 1710MHZ-1785MHZ; Downlink: 1805MHZ-1880MHZ Uplink: 2496MHZ-2690MHZ; Downlink: 2496MHZ-2690MHZ
WCDMA / GSM	WCDMA: Uplink:1850MHZ-1910MHZ; Downlink: 1930MHZ-1990MHZ Uplink:880MHZ-915MHZ; Downlink: 925MHZ-960MHZ GSM: 850MHZ, Uplink:824MHZ-849MHZ; Downlink: 869MHZ-894MHZ 900MHZ, Uplink:880MHZ-915MHZ; Downlink: 925MHZ-960MHZ 1800MHZ,Uplink:1710MHZ-1785MHZ; Downlink: 1805MHZ-1880MHZ 1900MHZ ,Uplink:1850MHZ-1910MHZ; Downlink: 1930MHZ-1990MHZ
Bluetooth	Support Bluetooth 2.0+EDR/3.0+HS/4.1+HS, transmission distance is 5-10m
Operating Environment	
Operating Temperature	—20C to 50C
Storage	—25C to 70C

Production Capacity:

✓ Indicates information has been verified onsite by a certification specialist

Production Capacity

Verified	Product Name	Production Line Capacity	Actual Units Produced(Previous Year)
✓	Thermal Printer	40,000 Sets / Month	250,000 Sets
✓	Dot Matrix Printer	15,000 Sets / Month	10,000 Sets
✓	Bluetooth Printer	30,000 Sets / Month	20,000 Sets
✓	Barcode Scanner	40,000 Sets / Month	20,000 Sets
✓	POS Machine	5,000 Sets / Month	10,000 Sets
✓	Magnetic Card Reader and Writer	45,000 Sets / Month	50,000 Sets

Verified by TUV on 2013.7.15

Quality Assurance:



OCOM is dedicated to providing most cost-effective products and services with highest quality that will meet customers' satisfaction.

Since the establishment, OCOM has been sticking strictly to the standard and requirements of ISO9001: 2000 in the processes of research, design, manufacturing and services. OCOM's products have passed CE, FCC, TUV, RoHs and other certifications.

We make strictly IQC, IPQC and OQC inspection per industrial standard. All the products must pass 24-48 hours aging test before shipment. Some designated models can have as long as 24 months warranty.

Test Equipments:

✓ Indicates information has been verified onsite by a certification specialist

Test Equipment and Facilities

Verified	Machine Name	Brand & Model No.	Quantity
✓	Ageing Tester	No Information	6
✓	Withstand Voltage Tester	CC2670A	1
✓	Oscilloscope	TBS1102	1
✓	DC Power Supply	PS-305DM	6
✓	Digital Torque Meter	HP100	1
✓	Calliper	GUANGLU	2
✓	Multi-meter	VC890D	7
✓	Test Computer	No Information	13

Verified by TUV on 2013.7.15

Certification:




Warranty and After Sales:



- ▶ All products' warranty are not less than 12 month, some models even up to 24 months warranty.
- ▶ Spare parts will be provided for mass orders for customers' local maintenance.
- ▶ Any product found to be defective within 30 days of shipment shall be deemed Dead on Arrival (DOA). DOA products will be advance replaced and shipped via express.
- ▶ Have distributors or authorized agents in the main market who can provide local repair and replacement services.
- ▶ Professional CRM management insures fast respond for customer's enquiries and orders tracking.
- ▶ Sales with many years experience in foreign trade, proficient in foreign languages and strong sense of responsibility.
- ▶ 7*24 hours online, responds with 12 hours in working days, and within 24 hours for rest days.

Packing and Shipment:

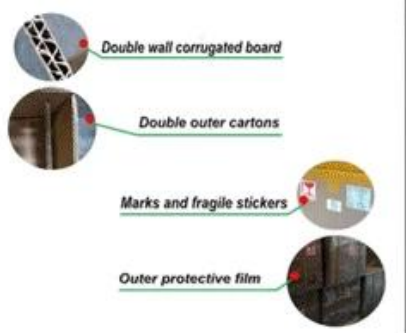

Payment:



secure payment



Customers Reference

Over the years, OCOM keep efforts on marking "OCOM" as an internationally recognized brand, and we have established goods relationship with our customers and have friendly communication with each other.



Company Profile



TRADE ASSURANCE

- 100% money refund for Late shipment & Quality problem
- Guarantee on-time delivery
- Third-party pre-shipment quality inspection (Optional)
- No transaction commission charged
- The HIGHEST assurance amount guaranteed by alibaba in the Auto-ID and POS industry .



OCOM Technologies Limited is a professional supplier specialized in POS and Auto-ID applications. Our products portfolio covers , Thermal Printer, Barcode printer, Dot Matrix Printer, Barcode Scanner, Magnetic Card Reader, Data Collector, POS Terminal, and other IOT products.



We have FCC, CE, RoHS, and other certifications. We have sell our products to West Europe, North American, Africa, Asia-Pacific and other countries.

OCOM has professional teams including marketing, R&D, quality control, production and sales service. All of the sales representatives have 3 to 10 years experience in international trading, which help us to meet the customers' needs. OCOM have been sticking to the quality system of ISO9001:2008. We conduct strict IQC, IPQC and OQC inspection in every industrial procedure. Based on our strong capacity, the normal lead time for main products is about 3 to 7 days even for bulk order.

You can find more information of us at: www.ocominc.com,

Together we quest for the best.



Why you choose us?



Contact us

Any queries, please contact us immediately, big surprise is waiting for you.

Sales Center:

Address: Unit701, Block 14, Zhongxing Industrial Park, Chuangye Road, Nanshan District, Shenzhen 518054, China

Website: www.ocominc.com www.possolution.com.cn;

E-mail: ocom@ocominc.com, info@possolution.com.cn ;

Tel: +86.755.86053207 ext 800;

Fax: +86.755.86053207 ext 868;

QQ: 2485890637, 190852203;

Wechat: szocominc, hj34924238;

Whatsapp: 008613352932860;



Documenti rilevanti:

*[CD OCBs-D8000](#)

