

Alimentato a batteria termica Bluetooth Mini stampante portatile compatibile con Android
(Moder: OCPP-M05)

Specifiche:

Dimensioni (L x P x A)	105 x 75 x 45 mm
Peso	134 g
Colore	Nero
Larghezza di stampa effettiva	48 millimetri
Metodo di stampa	Thermal stampa Linea
Comando Stampa	ESC / POS set di istruzioni compatibile
Velocità di stampa	A 90 mm / sec
Risoluzione	8 dots / mm (203DPI)
Stampa Font	In 12X24 / 24x24 in
Capacità Colonna	32 / 16columns
Dimensione dei caratteri	1,5 x 3,0 mm (larghezza x altezza) / 3.0x3.0mm (larghezza x altezza)
Formato carta	Diametro 58,0 millimetri di ± 0,1 millimetri x40.0
Spessore carta	0,06-0,08 mm
Set di caratteri	Alfanumerico / Testo cinese
Interfaccia	USB, RS-232,Bluetooth (opzionale)
Flash	256KB
Adattatore di alimentazione	9V DC / 2A
Alimentazione a batteria	Il DC / 1500 mA 7.4V; batteria può rimanere in 4-5 giorni, quando è piena di forza, può stampare 120-150m carta
Altre caratteristiche	Rilevamento di carta, il rilevamento di potenza, arrestare manualmente
Condizioni di lavoro	Temperatura: -10Centigrado~50CentigradoUmidità: 10%~90%
Condizioni di stoccaggio	Temperatura: -20Centigrado~70CentigradoUmidità: 5%~95%
Nome dispositivo	Può essere personalizzato per selezionare lettere e numeri fino a 30 caratteri ASCII.
Password	Input predefinita codice pairing "1234"Può essere personalizzato. Massimo 6 Digitals.
Dimensioni della spina di alimentazione	3,5 * 1,1 millimetri

Particolari del prodotto:



**Bluetooth
Thermal Printer
OCPP- M05**



Picture





Features

Small Size, BIG Performance

Support Windows, Android, or IOS;




Higher print speed 90mm/sec;

100km TPH Life;




Bluetooth, USB and RS232 communication for option;



Low power consumption and

large capacity Lithium battery;





All-round show



Parameter

Specifications	
Overall Dimension (W×D×H)	105×75×45mm
Weight	134g
Color	Black
Effective print width	48mm
Print method	Thermal line printing
Print commands	ESC/POS compatible command set
Print speed	Up to 90mm/sec
Resolution	8 dots/mm(203dpi)
Print font	12x24/ 24x24
Column capacity	32 columns/ 16columns
Character size	1.5 x 3.0 mm(W x H)/ 3.0x3.0mm(WxH)
Paper dimensions	58.0±0.1mm x diameter 40.0mm
Paper thickness	0.06 to 0.08mm
Character set	Alphanumeric/ Chinese Kanji
Interface	USB, RS-232, Bluetooth (optional)
Flash	256KB
Power Adapter	9V DC/2A
Battery Power	7.4V DC/ 1500mA; battery can stay by for 4-5 days, when it is full power, it can print 120-150m paper
Other features	Paper detection, power detection, Manual shut down

Working conditions	Temperature:-10℃~50℃,Humidity:10%~90%
Storage conditions	Temperature:-20℃~70℃,Humidity:5%~95%
Device name	Can be customized, letter and digital for option, at max 30 ASCII characters.
Password	Enter default pairing code "1234", it can be customized. At max 6 digitals.
Power plug dimension	3.5*1.1mm

Applications

Bus/Taxi receipt, Traffic Citation, Logistics, Transportation, Warehouse management, Delivery, Illegal Parking Ticket, Drugstore, Food delivery, restaurant, Price Tag, Retail/Farm





Production Line



Capacity

Verified	Product Name	Production Line Capacity	Actual Units Produced(Previous Year)
✓	Thermal Printer	40,000 Sets / Month	250,000 Sets
✓	Dot Matrix Printer	15,000 Sets / Month	10,000 Sets
✓	Bluetooth Printer	30,000 Sets / Month	20,000 Sets
✓	Barcode Scanner	40,000 Sets / Month	20,000 Sets
✓	POS Machine	5,000 Sets / Month	10,000 Sets
✓	Magnetic Card Reader and Writer	45,000 Sets / Month	50,000 Sets

✓ Indicates information has been verified onsite by TUV on 2013.7.15

Quality Assurance

OCOM is dedicated to providing most cost-effective products and services with highest quality that will meet customers' satisfaction.



Since the establishment, OCOM has been sticking strictly to the standard and requirements of ISO9001: 2000 in the processes of research, design, manufacturing and services. OCOM's products have passed CE, FCC, TUV, RoHS and other certifications.

We make strictly IQC, IPQC and OQC inspection per industrial standard. All the products must pass 24-48 hours aging test before shipment. Some designated models can have as long as 24 months warranty.

Test Equipments

Verified	Machine Name	Brand & Model No.	Quantity
✓	Ageing Tester	No information	6
✓	Withstand Voltage Tester	CC2670A	1
✓	Oscilloscope	TBS1102	1
✓	DC Power Supply	PS-305DM	6
✓	Digital Torque Meter	HP100	1
✓	Calliper	GUANGLU	2
✓	Multi-meter	VC890D	7
✓	Test Computer	No Information	13

✓ Indicates information has been verified onsite by TUV on 2013.7.15

Certifications




Packing and Shipment



Double wall corrugated board



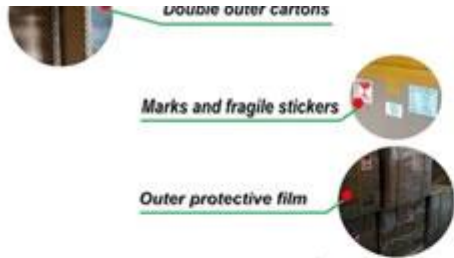

Payment



Customers Reference

Over the years, OCOM keep efforts on marking "OCOM" as an internationally recognized brand, and we have established goods relationship with our customers and have friendly communication with each other.





Why you choose us?



OCOM has been sticking to the quality system of ISO9001:2008. We make strictly IQC, IPQC and OQC inspection per industrial standard. All the products must pass 24-48 hours aging test before shipment. Some designated models can have as long as 24 months warranty. We have the mass production capabilities that produce thousands of printers and scanners a week. Based on our strong capacity, the normal lead time for main products is about 3 to 7 days even for bulk order.

"Integrity based, Strive for excellence, Win-win cooperation". We would like establish stable and reliable partnerships with customers all over the world. OEM/ODM is welcome.



Contact us

Any queries, please contact us immediately, big surprise is waiting for you.

 Sales Center:

Address: 11/F, Tower A, New Energy Building, #2009, Nanhai Ave., Nanshan district, Shenzhen
Guangdong, 518054, China;

E-mail: ocom@ocominc.com , ocomtech@gmail.com ;

Skype: [ocominc2000](https://www.skype.com/add?contact=ocominc2000), [ocominc](https://www.skype.com/add?contact=ocominc);

MSN: ocomtech@hotmail.com, ocominc@hotmail.com;

Trademanager: [szocominc, cn1500439666](https://www.trademanager.com/cn1500439666);

QQ: 2485890637, 190852203;

Tel/Fax: +86.755.8605.3207.

