

Stampante termica ad alta velocità da 80 mm, stampante POS 80 (Modello: OCPP -88A)

caratteristiche:

1. Aspetto unico con stampo affidabile;
2. Elevata velocità di stampa fino a 300 mm / secondo;
3. Opzionale auto Cutter;
4. Cavo e comunicazione wireless per le opzioni
5. Interfacce multiple disponibili: USB, USB + serie-+ LAN; e Wifi + USB, Bluetooth + USB
6. Allarme sonoro e luminoso supportato per uso cucina;
7. Supporto per la stampa di più tipi di codice 1D e QR;
8. Supporto per più lingue internazionali;
9. SDK per Android e IOS a disposizione;
10. Testina stampante affidabile con una durata di 100 km;
11. Compatibile con i comandi EPSON ESC / POS.

parametri:

Metodo di stampa	Stampe a linee termiche
Stampa carattere	576 punti / linea (predefinito), 512 punti / linea; Personaggi : Punto 24x24 cinese semplificato, supporto libreria font 18030, supporto per Taiwan tradizionale e HK (carattere complesso), Personaggi ANK;
font	A: 12 * 24 punti, 1,5 (W) * 3,0 (H) mm; B: 9 * 17 punti, 1.1 (W) * 2.1 (H) mm Semplificato / tradizionale: 24 * 24 punti, 3,0 (B) * 3,0 (H) mm
Tipo di codice a barre	JUPC-A / UPC-E / JAN13 (EAN13) / JAN8 (EAN8) / CODABAR / ITF / CODE39 / CODE93 / CODE128, QR code
Velocità di stampa	250 mm / sec un e due interfaccia, 300 mm / sec perr tre interfacce
Interfaccia	USB,USB + serie-+ LAN, Wifi + USB, Bluetooth + USB
Lavoro di stampa	Compatibile con EPSON ESC / POS comandi
driver	Win9X / Windows XP / Win2000 / Win2003 / Win Vista / Win 7 / Win 8 / Win8.1 / Linux, compatibile con ESPON, SDK per Android e IOS a disposizione.
Larghezza della carta	79,5 ± 0,5 mm (larghezza di stampa 72 mm)
Diametro della carta	83 millimetri
Spessore della carta	0.06-0.08mm
fresa	UNtaglierina uto (Opzionale)
Affidabilità di stampa	100 km
energia	DC24V / 2.5A

Temperatura	0-45 gradi C	
Umidità contraria	10-80%	
Dimensione esterna	190 *145*145(Mm)	
Peso	1.60kg	
Per ordinareing informazione	P / N	Ddescrizione
	OCPP -88A-U	USB porta, con taglierina per auto
	OCPP -88A-url	TUSB + + Serial Lan porta, con taglierina per auto
	OCPP -88A-W	wifi + USB porta, con taglierina per auto
	OCPP -88A-BU	Bluetooth + USB, con taglierina per auto
	OCPP -88A-TU0	USB portasenza taglierina
	OCPP -88A-url0	TUSB + + Serial Lan portasenza taglierina
	OCPP -88A-W0	wifi + USB portaona partire dal taglierina automatica
	OCPP -88A-BU0	Bluetooth + USB, senza taglierina automatica



Unique 80mm High Speed
POS Thermal Printer
OCPP-88A



Product Picture



Features:

Reliable with good price

Unique appearance with reliable mould



**High Printing Speed up to 300mm/second;
Auto Cutter Optional ;
Cord and cordless communication for options**

**Reliable printer head with 100km life;
Compatible with EPSON ESC/POS
commands.**



**Sound and light alarm supported
suitable for kitchen application;**



**Support multi international languages;
SDK for Android available;**



**Multiple interfaces available:
USB, USB+Serial, USB+ LAN,
USB+ Serial+ LAN; and Wifi+USB,
Bluetooth+USB+LAN**



Afrikaans	Arabic (Tunisia)	English (British)	French (Switzerland)	Latvian	Spanish (Costa Rica)
Albanian	Arabic (Yemen)	English (Canada)	German (Austria)	Lithuanian	Spanish (Dominican)
Arabic (Algeria)	Basque	English (Caribbean)	German (Liechtenstein)	Macedonian	Spanish (Ecuador)
Arabic (bahrain)	Belarus	English (Irish)	German (Luxembourg)	Polish	Spanish (Guatemala)
Arabic (Egypt)	Bulgarian	English (Jamaica)	German (Standard)	Portuguese (Brazil)	Spanish (Mexico)
Arabic (Iran)	Catalan	English (New Zealand)	German (Switzerland)	Portuguese (Portugal)	Spanish (panama)
Arabic (Jordan)	Chinese (Singapore)	English (South Africa)	Greek	Romanian	Spanish (Paraguay)
Arabic (Kuwait)	Chinese (Hongkong)	English (US)	Hebrew	Russian	Spanish (Peru)
Arabic (Lebanon)	Chinese (PRC)	Estonian	Hun	Serbian	Spanish (Uruguay)
Arabic (Libya)	Chinese (Taiwan)	Faroese	Icelandic	Slovak	Spanish (Venezuela)
Arabic (Morocco)	Croatian	Farsi	Indonesian	Slovenian	Thai Language
Arabic (Oman)	Czech	Finnish	Italian (Switzerland)	Swedish	Turkish
Arabic (Qatar)	Danish and Norwegian	French (Belgium)	Italian	Spanish (Argentina)	Ukrainian
Arabic (Saudi Arabia)	Dutch (Belgium)	French (Canada)	Japanese	Spanish (Bolivia)	Urdu
Arabic (Syria)	Dutch (standard)	French (Luxembourg)	Korean	Spanish (Chile)	Vietnamese
Arabic (UAE)	English (Australia)	French (Standard)	Vietnamese	Spanish (Colombia)	


Power plug for option:




How to use?

Connecting the printer:

- ▶ The power adapter cable connect to the printer power interface
- ▶ The interface cable connect on the printer port behind
- ▶ The cash drawer connecting cable connect to the printer's behind the cash drawer interface

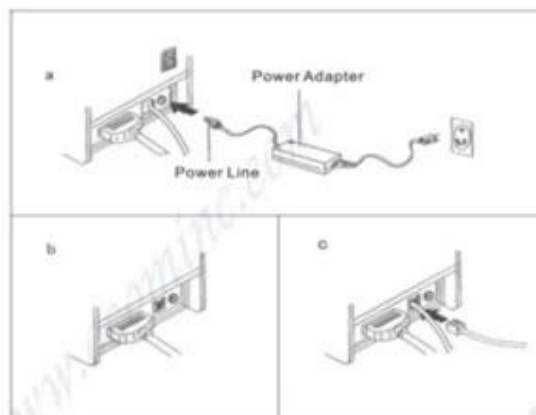


Installation of paper roll:

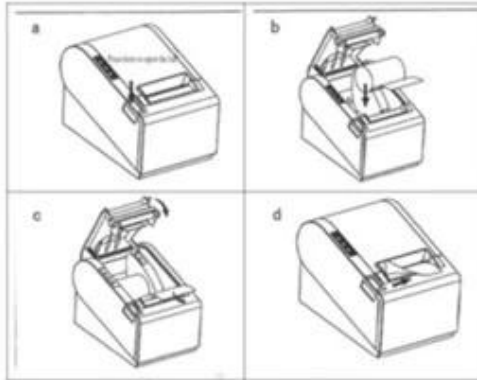

- A** Open the printer cover.
- B** Install the roller in the roll paper, and put them into the printer.
- C** Pull out some paper outside the printer and then close the printer cover.
- D** Close the top cover. Press the printer cover to avoid error position of roll paper.
- E** Tear-off the paper correctly.

Setting the Printing Mode(DIP switches):

The DIP switches are used to set the printer to perform various functions, such as cutter mode, character set, speed, beeper, print density and etc.



Power indicator:
Turn on/off the printer

Alarm indicator:
When the printer is out of paper, the cutter error occurs or printer head overheats, the ALARM indicator flashes.

Paper indicator:
Both of paper indicator and error indicator are on, means paper end-user, both of paper indicator and error indicator are off, means have paper.

FEED button:
Press to feed paper manually.

✓ Indicates information has been verified onsite by a certification specialist

Test Equipment and Facilities

Verified	Machine Name	Brand & Model No.	Quantity
✓	Ageing Tester	No Information	6
✓	Withstand Voltage Tester	CC2670A	1
✓	Oscilloscope	TBS1102	1
✓	DC Power Supply	PS-305DM	6
✓	Digital Torque Meter	HP100	1
✓	Calliper	GUANGLU	2
✓	Multi-meter	VC890D	7
✓	Test Computer	No Information	13

Verified by TUV on 2013.7.15

Certification:



Warranty and After Sales:



- ▶ All products' warranty are not less than 12 month, some models even up to 24 months warranty.
- ▶ Spare parts will be provided for mass orders for customers' local maintenance.
- ▶ Any product found to be defective within 30 days of shipment shall be deemed Dead on Arrival (DOA). DOA products will be advance replaced and shipped via express.
- ▶ Have distributors or authorized agents in the main market who can provide local repair and replacement services.
- ▶ Professional CRM management insures fast respond for customer's enquiries and orders tracking.
- ▶ Sales with many years experience in foreign trade, proficient in foreign languages and strong sense of responsibility.
- ▶ 7*24 hours online, responds with 12 hours in working days, and within 24 hours for rest days.

Packing and Shipment:



Payment:



secure payment



Trade Assurance

Customers Reference

Over the years, OCOM keep efforts on marking "OCOM" as an internationally recognized brand, and we have established goods relationship with our customers and have friendly communication with each other.



Contatto& Amp; ENSP; NOI

Indirizzo: 4 / F, Block 10, Zhongxing Industrial Park, Chuangye Road, Distretto di Nanshan, Shenzhen 518054, Cina;

Sito web: www.ocominc.com, www.pos.solution.com.cn;

E-mail: sales07@ocominc.com, sales07@ocomtech.com.cn;

Responsabile commerciale: cn1000542707;

Skype: live: vendite ;

MSN: ocomsales07@hotmail.com;

QQ: 3152989359;

Mobile / Wechat / Whatsapp: 0086.189.48778596;

Tel: 0086.755.86053207-807;

Fax: 0086.755.86053207-868;



Phoebe Hong



OCOM Technologies Limited

Add: 4/F, Block10, Zhongxing Industrial Park, Chuangye Road, Nanshan District, Shenzhen 518054, China

Tel: 0086.755.8605.3207 ext 807

Fax: 0086.755.8605.3207 ext 868

Web: www.ocominc.com

E-mail: sales07@ocominc.com, sales07@ocomtech.com.cn

Skype: [ocomsales07](https://www.skype.com/people/ocomsales07); **MSN:** ocomsales07@hotmail.com

Ali TM: [cn1000542707](https://www.ali.com/item/cn1000542707); **QQ:** 3152989359

Mobile/Wechat/Whatsapp: 0086.18948778596



Reliable One-Stop Supplier for POS and Auto-ID Related Products