

AndroidBased Industrial PDA

(Model No.:OCBS-D8000)

Kenmerk:

Android5.1 Operation System;

2G RAM, 16G ROM, TF-kaart kan tot to32 GB;

ARM Cortex-A53 64bit quad-core 1.3GHz;

Ondersteuning 4G LTE en 3G WCDMA;

GPS, A-GPS-plaatsbepaling per satelliet;

Hd 8 miljoen pixels, met LED, automatische scherpstelling;

SIM-kaart, PSAM card, Micro SD (TF) Card Expand Port;

Oplaadbare Li-Polymeer batterij 3.7V 4000mAh Option;

Kleur 4,0 inch QVGA-imiterende glas duurzame touch screen;

Sealed Milieu: IP65;

6 kanten kan invloed van 1.5m dalen tot cementen vloer dragen.

Specificatie:

fysieke Parameter	
Grootte	152mm (L) x 77 mm (H) x 29 mm (W)
Gewicht	<500g
scherm	Color 4.0 inch QVGA imiterende glas duurzaam touch screen TFT-LCD, 650.000 kleuren, 480 * 800 (QVGA-formaat) De helderheid van de LED-achtergrondverlichting is verstelbaar
Expand Port	SIM-kaart, PSAM card, Micro SD (TF) Card
communicatie-interface	USB2.0 apparaat, RS-232 (optioneel)
Invoer modus	Standaard Stylus, Handschrift, het aanraken van ingang of het toetsenbord
Batterij capaciteit	Oplaadbare Li-Polymeer batterij 3.7V 4000mAh Optioneel
Frequentie	8Ω1W speaker
sleutel	29pcs zachte siliconen key
prestaties Parameter	
CPU	ARM Cortex-A53 64bit Quad-Core 1.3GHz
RAM	2G RAM
Flash ROM	Standard 16G NAND Flash-opslag Micro SD / TF-poort (Max tot 32G)
Data communicatie	
WIFI	Ondersteuning IEEE802.11b / g protocol, het moeten effectieve draadloze LAN-signaal deksel

FDD-LTE	Uplink: 1920MHZ-1980MHZ; Downlink: 2110MHZ-2170MHZ Uplink: 1710MHZ-1785MHZ; Downlink: 1805MHZ-1880MHZ Uplink: 2496MHZ-2690MHZ; Downlink: 2496MHZ-2690MHZ
WCDMA / GSM	WCDMA: Uplink: 1850MHZ-1910MHZ; Downlink: 1930MHZ-1990MHZ Uplink: 880MHZ-915MHZ; Downlink: 925MHz-960MHz GSM: 850MHz, Uplink: 824MHZ-849MHZ; Downlink: 869MHz-894MHZ 900MHz, Uplink: 880MHZ-915MHZ; Downlink: 925MHz-960MHz 1800MHz, Uplink: 1710MHZ-1785MHZ; Downlink: 1805MHZ-1880MHZ 1900MHz, Uplink: 1850MHZ-1910MHZ; Downlink: 1930MHZ-1990MHZ
Bluetooth	Ondersteuning van Bluetooth 2.0 + EDR, transmissie afstand is 5-10m
Werkomgeving	
Temperatuur	-20 °C tot 50 °C
Bewaar temperatuur	-25 °C tot 70 °C
milieu Vochtigheid	5% RH - 95% RH (geen condensatie)
Drop Specificaties	6 kanten kan invloed van 1.5m dalen tot cementen vloer in de range dragen werkt temperatuur
roll Specificaties	1000 keer / 0.5m, roll on 6 zijden contactoppervlak
Sealed Milieu	IP65
Ontwikkelomgeving	
Besturingssysteem	Android5.1
SDK	exclusieve gebruik van software development kit
ondersteunde taal	JAVA
Development Tool	Verduistering
Een een-dimensionale barcode verzamelen	
Eendimensionale CCD scanners	symbool SE655
Resolutie	5mil minimale breedte
Omgevingslicht	0ft.candles-10000ft.candles
Scansnelheid	50 / sec
scanning Hoek	53° ± 3°
Ondersteuning Bar Code Type	UPC / EAN, Bookland EAN, Code 128, Code39, Code 93, Code 11, Interleaved 2 van 5, Discrete 2 van 5, Chinese 2 van5, Matrix 2 van 5, Inverse 1D, MSI, GS1 DataBar, etc.
Eendimensionale laserscanner	Mingde966 Standaard, Symbol 955, HoneywellN4313 (voor optionele)
Resolutie	4mil minimale breedte
Omgevingslicht	10000ft.candles (107.640 lux)
Scansnelheid	104 (±) 12 / sec (bothway)
scanning Hoek	47 ° ± 35° (Standard) / 35° ± 3° (narrow angle)
Ondersteuning Bar Code Type	UPC / EAN, Code128, Code39, Code93, Code11, Interleaved 2 of 5, Discrete 2 van 5, Chinese 2 van 5, Codabar, MSI, RSS
Twee-dimensionale barcode acquisitie	
CMOS Scanner	Newland 3096 Standard, HONEYWELL N3680 voor optionele
De Sensor Resolutie	752 (level) × 480 (verticaal) pels (grijswaarde)
Omgevingslicht	Alle donkere 9000ft.candles / 96900 lux
Focus element (VLD)	655 nm ± 10nm
Ondersteuning barcode soort	PDF417, MicroPDF417, Composiet, RSS, TLC-39, Datamatrix, QR code, Micro QR code, Aztec, MaxiCode; Postcodes: US PostNet, US Planet, UK Postal, Australian Postal, JapanPostal Nederlandse Postal (KIX) 3

RFID	
LF	125K; ISO11784 / ISO11785 protocol
HF	13,56 MHz; ISO14443A / B protocol
Camera	Hd 8 miljoen pixels, met LED, automatische scherpstelling
GPS	Ondersteuning A-GPS



Android Based Industrial PDA

OCBS-D8000




Product Picture



Features

Reliable with good price

**Android 5.1 Operating System;
Color 4.0 inch QVGA imitative glass
durable touch screen;**

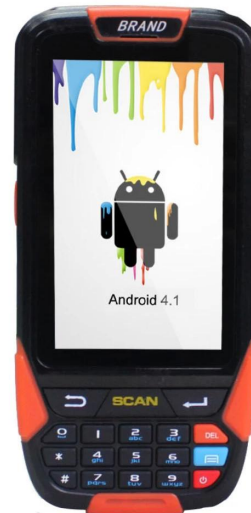

**Support 1D or 2D barcode scanning
Support wifi and bluetooth**

**FDD-LTE.WCDMA,GSM Support
A-GPS satellite positioning optipn
ARM Cortex-A53 64bit?Quad-Core 1.3GHZ**





Hd 8million pixels,with LED,
automatic focusing;
RFID Reader and writer optional

PSAM Card SIM Card, Micro SD(TF)Card Expand Port
3.7V 4000mAh Rechargeable Li-Polymer
Battery.



Sealed Environment:IP65;
6 side can bear impact from
1.5m drop to cement floor.



Application place



Bookstore



Supermarket



Pharmacy



Warehouse



Logistics



Restaurant

Parameter

Physical Parameter	
Size	152mm(L)×77mm(H)×29mm(W)
Weight	<500g
Display Screen	Color 4.0 inch QVGA imitative glass durable touch screen TFT-LCD, 650000 colors, 480*800 (QVGA size) The brightness of LED Backlight is adjustable
Expand Port	SIM card, , Micro SD (TF) Card
Communication Interface	USB2.0 Device,
Input Mode	Standard Stylus, Handwriting, touching input or keyboard input
Battery Capacity	Rechargeable Li-polymer Battery 3.7V 4000mAh Optional
Performance Parameter	
CPU	ARM Cortex-A53 64bit Quad-Core 1.3G
RAM	2G RAM
Flash ROM	Standard 16G NAND Flash Storage Micro SD/TF port (Max up to 32G)
Data Communication	
WI-FI	Support IEEE802.11b/g/n protocol, it need effective wireless LAN signal cover
FDD-LTE	Uplink: 1920MHZ-1980MHZ; Downlink: 2110MHZ-2170MHZ Uplink: 1710MHZ-1785MHZ; Downlink: 1805MHZ-1880MHZ Uplink: 2496MHZ-2690MHZ; Downlink: 2496MHZ-2690MHZ
WCDMA / GSM	WCDMA: Uplink:1850MHZ-1910MHZ; Downlink: 1930MHZ-1990MHZ Uplink:880MHZ-915MHZ; Downlink: 925MHZ-960MHZ GSM: 850MHZ, Uplink:824MHZ-849MHZ; Downlink: 869MHZ-894MHZ 900MHZ, Uplink:880MHZ-915MHZ; Downlink: 925MHZ-960MHZ 1800MHZ,Uplink:1710MHZ-1785MHZ; Downlink: 1805MHZ-1880MHZ 1900MHZ ,Uplink:1850MHZ-1910MHZ; Downlink: 1930MHZ-1990MHZ
Bluetooth	Support Bluetooth 2.0+EDR/3.0+HS/4.1+HS, transmission distance is 5-10m
Operating Environment	
Operating Temperature	—20C to 50C
Storage	—25C to 70C

Production Capacity:

✓ Indicates information has been verified onsite by a certification specialist

Production Capacity

Verified	Product Name	Production Line Capacity	Actual Units Produced(Previous Year)
✓	Thermal Printer	40,000 Sets / Month	250,000 Sets
✓	Dot Matrix Printer	15,000 Sets / Month	10,000 Sets
✓	Bluetooth Printer	30,000 Sets / Month	20,000 Sets
✓	Barcode Scanner	40,000 Sets / Month	20,000 Sets
✓	POS Machine	5,000 Sets / Month	10,000 Sets
✓	Magnetic Card Reader and Writer	45,000 Sets / Month	50,000 Sets

Verified by TUV on 2013.7.15

Quality Assurance:



OCOM is dedicated to providing most cost-effective products and services with highest quality that will meet customers' satisfaction.

Since the establishment, OCOM has been sticking strictly to the standard and requirements of ISO9001: 2000 in the processes of research, design, manufacturing and services. OCOM's products have passed CE, FCC, TUV, RoHs and other certifications.

We make strictly IQC, IPQC and OQC inspection per industrial standard. All the products must pass 24-48 hours aging test before shipment. Some designated models can have as long as 24 months warranty.

Test Equipments:

✓ Indicates information has been verified onsite by a certification specialist

Test Equipment and Facilities

Verified	Machine Name	Brand & Model No.	Quantity
✓	Ageing Tester	No Information	6
✓	Withstand Voltage Tester	CC2670A	1
✓	Oscilloscope	TBS1102	1
✓	DC Power Supply	PS-305DM	6
✓	Digital Torque Meter	HP100	1
✓	Calliper	GUANGLU	2
✓	Multi-meter	VC890D	7
✓	Test Computer	No Information	13

Verified by TUV on 2013.7.15

Certification:




Warranty and After Sales:



- ▶ All products' warranty are not less than 12 month, some models even up to 24 months warranty.
- ▶ Spare parts will be provided for mass orders for customers' local maintenance.
- ▶ Any product found to be defective within 30 days of shipment shall be deemed Dead on Arrival (DOA). DOA products will be advance replaced and shipped via express.
- ▶ Have distributors or authorized agents in the main market who can provide local repair and replacement services.
- ▶ Professional CRM management insures fast respond for customer's enquiries and orders tracking.
- ▶ Sales with many years experience in foreign trade, proficient in foreign languages and strong sense of responsibility.
- ▶ 7*24 hours online, responds with 12 hours in working days, and within 24 hours for rest days.

Packing and Shipment:



Payment:



secure payment



Customers Reference

Over the years, OCOM keep efforts on marking "OCOM" as an internationally recognized brand, and we have established goods relationship with our customers and have friendly communication with each other.



Company Profile



TRADE ASSURANCE

- 100% money refund for Late shipment & Quality problem
- Guarantee on-time delivery
- Third-party pre-shipment quality inspection (Optional)
- No transaction commission charged
- The HIGHEST assurance amount guaranteed by alibaba in the Auto-ID and POS industry .



OCOM Technologies Limited is a professional supplier specialized in POS and Auto-ID applications. Our products portfolio covers , Thermal Printer, Barcode printer, Dot Matrix Printer, Barcode Scanner, Magnetic Card Reader, Data Collector, POS Terminal, and other IOT products.



We have FCC, CE, RoHS, and other certifications. We have sell our products to West Europe, North American, Africa, Asia-Pacific and other countries.

OCOM has professional teams including marketing, R&D, quality control, production and sales service. All of the sales representatives have 3 to 10 years experience in international trading, which help us to meet the customers' needs.

OCOM have been sticking to the quality system of ISO9001:2008. We conduct strict IQC, IPQC and OQC inspection in every industrial procedure. Based on our strong capacity, the normal lead time for main products is about 3 to 7 days even for bulk order.

You can find more information of us at: www.ocominc.com,

Together we quest for the best.



Why you choose us?



Contact us

Any queries, please contact us immediately, big surprise is waiting for you.

Sales Center:

Address: Unit701, Block 14, Zhongxing Industrial Park, Chuangye Road, Nanshan District, Shenzhen 518054, China

Website: www.ocominc.com www.possolution.com.cn;

E-mail: ocom@ocominc.com, info@possolution.com.cn ;

Tel: +86.755.86053207 ext 800;

Fax: +86.755.86053207 ext 868;

QQ: 2485890637, 190852203;

Wechat: szocominc, hj34924238;

Whatsapp: 008613352932860;



Relevante documenten:

*[OCBS-D8000 CD](#)

