

Handheld auto-scan barcodescanner voor 1D / 2D met USB of seriële poort (M / N .: OCBS -2008)

Hoofd Voorzien zijn van:

Hoogwaardige beeldverwerkingstechnologie;
 Omni-directioneel scannen, gemakkelijk te scannen;
 Kan de barcode op het scherm en de kleurenbarcode lezen;
 4 millimeter uitstekende scannauwkeurigheid;
 Ondersteuning voor meerdere speciale functies;
 Multi-interfaces optioneel;
 Sta voor optie.

Prestatiekenmerken:

| | | |
|------------------------------|--|--|
| Functie | | |
| Lichtbron | Witte LED | |
| signaal | ondersteunde | |
| Stand | facultatief | |
| Indicator | Groene LED, piep | |
| Scan de prestaties | | |
| Sensor | CMOS | |
| Resolutie | 640 * 480.256 grijswaarden | |
| Maximale decoderingssnelheid | 13mil UPC 40cm / s | |
| Leeshoek | horizontaal 50 graden; verticaal 20 graden | |
| precisie | ≥4mil | |
| Decodeermogelijkheid | 1D | UPC-A, UPC-E, UPC-E1, EAN-13, EAN-8, ISBN (Bookland EAN), ISSN, Code 39, Code 39 volledige ASCII, Code 32, Trioptische Code 39, Interleaved 2 van 5, Industrial 2 van 5 (Discrete 2 van 5), Matrix 2 van 5, Codabar (NW7), Code 128, UCC / EAN 128 (GS1-128), ISBT 128, Code93, Code 11 (USD-8), MSI / Plessey |
| | 2D | PDF417, MicroPDF417, QR-code, DataMatrix, Han Xin-code, Aztec-code, GS1 Composite |
| Scherptediepte | Code 39 (5mil): 50 mm ~ 120 mm Code 39 (10mil): 25 mm ~ 250 mm UPC / EAN (13mil): 20 mm ~ 320 mm Datamatrix (7,5 ml): 63 mm ~ 150 mm PDF417 (6.6mil): 62mm ~ 145mm | |
| Gevoeligheid | Helling ± 45 ° @ 0 ° rol en 0 ° scheefloop Rotatie ± 30 ° @ 0 ° Pitch en 0 ° Skew Doorbuiging ± 45 ° @ 0 ° rol en 0 ° scheefstand | |
| Elektrisch | | |
| Interface | USB, USB COM (virtuele seriële poort) | |
| Ingangsspanning | 3.3v ~ 5v DC | |
| Standaard vermogen | 2.0w (400mA) | |
| Maximum kracht | 2,5 w (450mA) | |
| DC-adapter | Max. 5.5V 1A | |
| LED KLASSE | Klasse I | |
| EMC-test | FCC part15, IEC60825-1, EN55022 Klasse B | |
| Gebruikersomgeving | | |
| Gebruik temperatuur | -20 graden C ~ +60 graden C (-4 graden F tot 144 graden F) | |
| Bewaar temperatuur | -30 graden C ~ +70 graden C (-22 graden F tot 158 graden F) | |
| Vochtigheid | 5% - 95% (niet-condensatie) | |
| Valweerstand: | 1.5m (5.0ft) valt naar beton | |
| IP-klasse | IP54 | |
| Licht intensiteit fysiek | Werken: zonlicht, fluorescentielampen | |
| Dimensies | 156 * 68 * 83mm | |

| | |
|-----------------|--|
| Gewicht | 195 g (zonder standaard) |
| Pakket dimensie | 48 * 36 * 47 CM (20 stks met standaard 13.5 KG) |
| | 48 * 39 * 52 CM (30 stks zonder standaard 15 KG) |



Handheld Image Scanner for 1D/2D Barcode

OCBS-2008



Product Picture




Features

Reliable with good price

- High performance imaging technology;
Omni-directional scanning, easy to scan;



- 4mil excellent scanning accuracy ;
Can read the barcode on the screen
and color barcode;



Multi special function setting supported;
SDK/API Available;



Multi interfaces optional;
Stand for option.



Application place



Bookstore



Supermakte



Pharmacy



Warehouse



Clothing store



Restaurant

Parameter

| Function | | |
|------------------------|---|--|
| Light source | White LED | |
| Beep | Supported | |
| Stand | Optional | |
| Indicator | Green LED, beep | |
| Scan performance | | |
| Sensor | CMOS | |
| Resolution | 640*480,256 gray levels | |
| Maximum decoding speed | 13mil UPC 40cm/s | |
| Reading angle | horizontally 50 deg; vertically 20 Deg | |
| Precision | ≥4mil | |
| Decode capability | 1D | UPC-A, UPC-E, UPC-E1, EAN-13, EAN-8, ISBN (Bookland EAN), ISSN, Code 39, Code 39 full ASCII, Code 32, Trioptic Code 39, Interleaved 2 of 5, Industrial 2 of 5 (Discrete 2 of 5), Matrix 2 of 5, Codabar (NW7), Code 128, UCC/EAN 128 (GS1-128), ISBT 128, Code93, Code 11 (USD-8), MSI/Plessey |
| | 2D | PDF417, MicroPDF417, QR Code, DataMatrix, Han Xin Code, Aztec Code, GS1 Composite |
| Depth of field | Code 39(5mil): 50mm~120mm Code 39(10mil): 25mm~250mm UPC/EAN (13mil): 20mm~320mm Data Matrix(7.5mil): 63mm~150mm PDF417(6.6mil): 62mm~145mm | |
| Sensitivity | Inclination ±45° @0°Roll and 0°Skew Rotation ±30° @0°Pitch and 0°Skew Deflection ±45° @0°Roll and 0°Skew | |
| Electrical | | |
| Interface | USB,USB COM(virtual serial port) | |
| Input Voltage | 3.3v~5v DC | |
| Standard Power | 2.0w (400mA) | |
| Max Power | 2.5w (450mA) | |
| DC adapter | Max 5.5V 1A | |
| LED CLASS | Class I | |
| EMC Test | FCC part15,IEC60825-1,EN55022 Class B | |
| User Environment | | |
| Operate Temperature | -20 deg C ~ +60 deg C (-4 Deg F to 144 deg F) | |
| Storage Temperature | -30 deg C ~ +70 Deg C (-22 Deg F to 158 deg F) | |
| Humidity | 5% - 95%(non- condensation) | |
| Drop resistance: | 1.5m (5.0ft) drops to concrete | |
| IP class | IP54 | |
| Light intensity | Working: sun lights, fluorescent lights | |
| Physical | | |
| Dimensions | 156*68*83mm | |
| Weight | 195 g (without stand) | |
| Package dimension | 48*36*47CM (20pcs with stand 13.5KG) | |
| | 48*39*52CM (30pcs without stand 15KG) | |

Production Capacity:

✓ Indicates information has been verified onsite by a certification specialist

Production Capacity

| Verified | Product Name | Production Line Capacity | Actual Units Produced(Previous Year) |
|----------|---------------------------------|--------------------------|--------------------------------------|
| ✓ | Thermal Printer | 40,000 Sets / Month | 250,000 Sets |
| ✓ | Dot Matrix Printer | 15,000 Sets / Month | 10,000 Sets |
| ✓ | Bluetooth Printer | 30,000 Sets / Month | 20,000 Sets |
| ✓ | Barcode Scanner | 40,000 Sets / Month | 20,000 Sets |
| ✓ | POS Machine | 5,000 Sets / Month | 10,000 Sets |
| ✓ | Magnetic Card Reader and Writer | 45,000 Sets / Month | 50,000 Sets |

Verified by TUV on 2013.7.15

Quality Assurance:



OCOM is dedicated to providing most cost-effective products and services with highest quality that will meet customers' satisfaction.

Since the establishment, OCOM has been sticking strictly to the standard and requirements of ISO9001: 2000 in the processes of research, design, manufacturing and services. OCOM's products have passed CE, FCC, TUV, RoHs and other certifications.

We make strictly IQC, IPQC and OQC inspection per industrial standard. All the products must pass 24-48 hours aging test before shipment. Some designated models can have as long as 24 months warranty.

Test Equipments:

✓ Indicates information has been verified onsite by a certification specialist

Test Equipment and Facilities

| Verified | Machine Name | Brand & Model No. | Quantity |
|----------|--------------------------|-------------------|----------|
| ✓ | Ageing Tester | No Information | 6 |
| ✓ | Withstand Voltage Tester | CC2670A | 1 |
| ✓ | Oscilloscope | TBS1102 | 1 |
| ✓ | DC Power Supply | PS-305DM | 6 |
| ✓ | Digital Torque Meter | HP100 | 1 |
| ✓ | Calliper | GUANGLU | 2 |
| ✓ | Multi-meter | VC890D | 7 |
| ✓ | Test Computer | No Information | 13 |

Verified by TUV on 2013.7.15

Certification:




Warranty and After Sales:



- ▶ All products' warranty are not less than 12 month, some models even up to 24 months warranty.
- ▶ Spare parts will be provided for mass orders for customers' local maintenance.
- ▶ Any product found to be defective within 30 days of shipment shall be deemed Dead on Arrival (DOA). DOA products will be advance replaced and shipped via express.
- ▶ Have distributors or authorized agents in the main market who can provide local repair and replacement services.
- ▶ Professional CRM management insures fast respond for customer's enquiries and orders tracking.
- ▶ Sales with many years experience in foreign trade, proficient in foreign languages and strong sense of responsibility.
- ▶ 7*24 hours online, responds with 12 hours in working days, and within 24 hours for rest days.

Packing and Shipment:

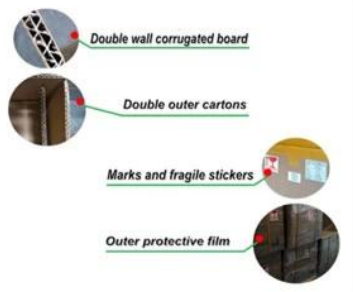

Payment:



secure payment



Customers Reference

Over the years, OCOM keep efforts on marking "OCOM" as an internationally recognized brand, and we have established goods relationship with our customers and have friendly communication with each other.



Company Profile



TRADE ASSURANCE

- 100% money refund for Late shipment & Quality problem
- Guarantee on-time delivery
- Third-party pre-shipment quality inspection (Optional)
- No transaction commission charged
- The HIGHEST assurance amount guaranteed by alibaba in the Auto-ID and POS industry .



OCOM Technologies Limited is a professional supplier specialized in POS and Auto-ID applications. Our products portfolio covers , Thermal Printer, Barcode printer, Dot Matrix Printer, Barcode Scanner, Magnetic Card Reader, Data Collector, POS Terminal, and other IOT products.



We have FCC, CE, RoHS, and other certifications. We have sell our products to West Europe, North American, Africa, Asia-Pacific and other countries.

OCOM has professional teams including marketing, R&D, quality control, production and sales service. All of the sales representatives have 3 to 10 years experience in international trading, which help us to meet the customers' needs.

OCOM have been sticking to the quality system of ISO9001:2008. We conduct strict IQC, IPQC and OQC inspection in every industrial procedure. Based on our strong capacity, the normal lead time for main products is about 3 to 7 days even for bulk order.

You can find more information of us at: www.ocominc.com, Together we quest for the best.





Monica Fu



OCOM Technologies Limited

Add: 4/F, Block10, Zhongxing Industrial Park, Chuangye Road, Nanshan District, Shenzhen 518054, China

Tel: 0086.755.8605.3207 ext 801

Fax: 0086.755.8605.3207 ext 868

Web: www.ocominc.com

E-mail: sales01@ocominc.com, sales01@ocomtech.com.cn

Skype: ocomsales01; **MSN:** ocomsales01@hotmail.com

Ali TM: cn1001868228; **QQ:** 1483705401

Mobile/Wechat/Whatsapp: 0086.189 4871 3992



Reliable One-Stop Supplier for POS and Auto-ID Related Products