

11,6 inch Windows-touchscreen POS Systeem met Printer, scanner, Weergave, RFID en MSR

(M/N:POS-M1106-W)

[The Android version for optional, click here for more details!](#)

Functies:

Windows 7 Bètasysteem;

J1900 Quadcore 1.99 GHz-Verwerker;

4 G-RAM en 64G SSD;

11.6 Inch High-definition kleurenscherm;

Standaardresolutie van 1366*768, kan tot 1080P;

Ondersteuning van ingebouwde thermische printer van 58/80 mm;

Kan o optionele 5200 mAh batterij met grote capaciteit;

Kan optioneel VFD LCD-scherm MSR, RFID, 1D/2D barcodescanner weergeven.

Toepassingsgebied

Catering: hotel, restaurant, fastfoodrestaurant, koffiebar, bakkerij en banketbakkerij

Detailhandelaar: Business Street, boetiek, warenhuis, cBesturingssysteemmeticawinkel en eerste klas kapperszaak

Recreatie: sauna, spa, nachtclub, themapark, casino en verkooppunt voor loten

Commercieel: informatiebeheerterminals voor parkeerplaats, herberg, luchtvaart, metro, and station

Specificatie

Processor	J1900 Quadcore 1.99 GHz-processor
OS	Win 7 Beta, kan optioneel Win 10 Beta worden
Geheugen	4G RAM 64G SSD
Display	11.6 inch Kleurenscherm met hoge resolutie
Oplossing	1366*768, (kan tot 1920*1080P)
Touch screen	Tien-punt capacitief touchscreen
Printer	58 mm (geen snijder) of 80 mm (automatische snijder) thermische printer
Magnetische kaartlezer	ISO7811 1/2/3 nummers, ondersteuning voor dubbel vegen (Optioneel)
RFID-kaartlezer	ISO14443TypeA, (Optioneel)
Streepjescodescanner	1D/2D-barcode decoding (Optioneel)
Pole weergave	LCD/VFD-display (optioneel)
Wifi	802.11b/g/n
USB	5 *USB2.0,
RJ11	2*RJ11

LAN	1*RJ45-poort ,100/1000 ZELFAANPASSING
RS232	1 *RS232 ,(Kan tp naar 3 RS232-beveiliging)
Stroom	DC 12V,5A
Accu	5200 mAh (Optioneel, standaardproduct bevat geen batterij)
Werkomgeving	Werktemperatuur: -10 °C ~ 50 °C Bewaar temperatuur: -20 °C ~ 60 °C Relatieve vochtigheid: 10%~90%

Model: POS-M1106-A/W

Desktop POS Terminal

OCOM POS-M1106



Printing



Scanning



NFC



Display



Card Reader



Battery



Android 7.1 operating system;
RK3368 Octa-core 1.5GHz processor;
2G RAM and 8G eMMC;
11.6 Inch High-definition color screen;
Standard 1366*768 resolution, can up to 1080P;
Support 58/80mm thermal printer built in;
5200mAh Battery for option;
VFD LCD display MSR, RFID and 1/2D Barcode Scanner for option.

OCOM POS-M1106

This tablet pos terminal is elegant design and small size ideal for shop, restaurant and lottery. It can do rechargeable battery for outdoor or non-stable electricity conditions.



OS Android 7.1 Windows	CPU RK3368 Octa-core 1.5GHz	Memory 2G RAM+ 8G ROM	Button Power Button (Lock Screen Button)	Adapter DC12V, 5A
Wi-Fi 2.4G 802.11b/g/n	Bluetooth Support BLE Support Bluetooth 2.1/3.0/4.0	Size 303*320*98mm	Port 1*Power port 1*Micro USB debug port 5*USB2.0 2*RJ11 1*RJ45 1*RS232 (can tp to 3 RS232 prots)	Printing High Speed Thermal Printing Paper With: 58mm(no cutter) Printing Speed: 70mm/s Paper Roll Diameter: 60mm OR Paper With: 80mm(auto cutter) Printing Speed: 160mm/s Paper Roll Diameter: 60mm
Micro SD(TF) Support, Up to 32GB	Environment Working temperature: -10 °C ~ 50 °C Storage temperature: -20 °C ~ 60 °C	Display 11.6 Inch Touch Screen Resolution: 1366*768P (can up to 1920*1080P)		

Optional

 Scanning	 NFC	 Display	 Battery	 Card Reader
--	---	---	---	--

Note:

1. Real memory will be reduced due to a number of factors, and there are differences. Operating system also occupy part of memory.
2. Actual product specifications when sold take precedence over what may be listed at this catalogue; Product specifications are subject to change without prior notice.



POS-M1106-W





POS-M1106-W





POS-M1106-W





POS-M1106-W





POS-M1106-W






POS-M1106-W





POS-M1106-W

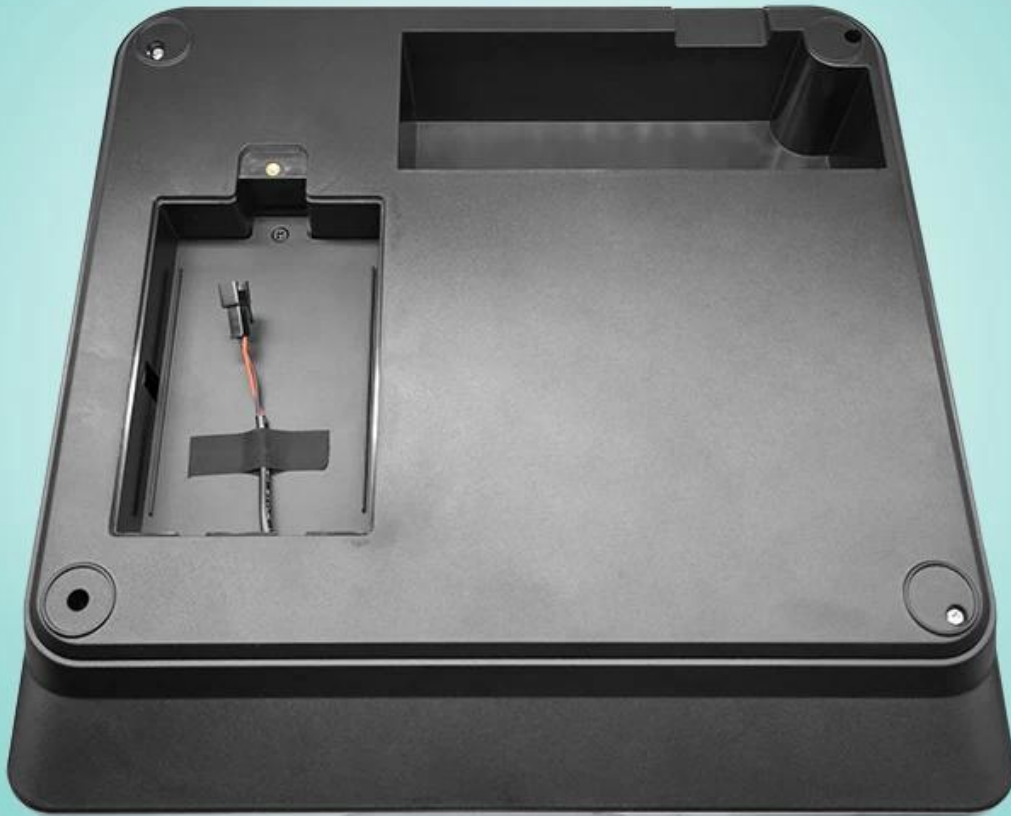



Relevante documenten:

[POS-M1106 SPEC](#)

[POS-M1106SDK](#)