

2 lijnen USB POS VFD klantendisplay produceert VFD220A (Modelnummer: VFD220A)

specificaties:

Communicatie	
Interface:	Seriële poort (RS-232)
Baudrate:	9600bps
Helderheid:	2000cd
Databit:	8bit
Stop bit:	1bit
Handshake-sigitaal:	Nee
Elektrisch:	Door de kracht van de hostcomputer DC12 (grote 4ps-interface)
display:	VFD Helder blauwgroen fluorescerend scherm
Toon karakters:	2 regels x 20 tekens / regel, 40 tekens, 5 x 7 punten
Weergavegebied:	160 mm (B) x 23,8 mm (H)
Tekengrootte:	hoog 11 mm x breed 7 mm
MTBF:	25.000 uur
Dimensies	
Paneelafmetingen:	80 (H) x 225 (B) x37 (D) mm
Ondersteuning afmetingen:	Lange ondersteuning: 480 mm (Base bevatten) Korte ondersteuning: 225 mm (Base bevatten) Basisafmetingen: 185 (L) x95 (b) x25 (H) mm
Pitching bewegingshoek:	45 °, kan comfortabel zijn en de visuele hoek aanpassen
Gewicht:	1,2 kg (bruto)
Milieu	
Bedrijfstemperatuur:	-20 ~ 70 A18
Opslagtemperatuur;	-40 ~ 80 A19
Luchtvochtigheid regelen:	10 ~ 85%
Luchtvochtigheid bij opslag:	10 ~ 90%
Command Set	
De goedkeuring van internationale standaard algemene opdracht ESC / POS, kan worden gebruikt in DOS of Windows systeemomgeving, geen stuurprogramma nodig, alleen volgens het formaat seriële volgorde ingesteld om gegevens te verzenden kan inhoud tonen.	
Met de functie van het openen van de geldlade Alle richting instelbaar.	

Productdetails:



Double Line VFD Customer Display

VFD220A

Product Picture





Features

Simple but not easy

Double lines 20*2 characters VFD display;





Support 13 countries languages;




Power may be sourced from system,
with the bracket and cable kit supplied
in typical configuration.



360 degree rotation angle;



Pole height is adjustable;



All-round show





Application Area

Catering: hotel, restaurant, fast-food restaurant, coffee shop, bakery and cake shop

Retailer: Business Street, boutique, department store, cosmetics shop and high-class barbershop

Recreation: sauna, spa, night club, theme park, casino and point of sales for lottery ticket

Commercial: information management terminals for parking lot, inn, aviation, subway, station and wharf



Parameter

Communication	
Interface:	Serial port (RS-232)
Baud rate:	9600bps
Brightness:	2000cd
Data bit:	8bit
Stop bit:	1bit
Handshake signal:	No
Electrical:	By the power of the host computer DC12 (big 4ps interface)
Display:	VFD Bright blue-green fluorescent display
Display characters:	2 line x 20 characters / line, 40 characters, 5 x 7 Dots
Display area:	160mm(W) x 23.8mm(H)
Character size:	high 11mm x wide 7mm
MTBF:	25,000 hours
Dimensions	
Panel dimensions:	80(H) x 225(W)x37(D) mm
Support dimensions:	Long support: 480mm (Contain base) Short support: 225mm (Contain base) Base dimensions: 185(L) x95(w) x25(H) mm
Pitching move angle:	45°, Can provide comfortable, and adjust the visual Angle
Weight:	1.2Kg (gross)
Environment	
Operating Temp:	-20~70 A18
Storage Temp:	-40~80 A19
Operating Humidity:	10~85%
Storage Humidity:	10~90%
Command Set	
Adopting international standard general command ESC/POS, Its can used in DOS or Windows System Environment, Don't need any driver, Only according to the format serial order set to send data can show content.	

With the function of opening the cash drawer All direction adjustable.

Production Line



Capacity

Verified	Product Name	Production Line Capacity	Actual Units Produced(Previous Year)
✓	Thermal Printer	40,000 Sets / Month	250,000 Sets

✓	Dot Matrix Printer	15,000 Sets / Month	10,000 Sets
✓	Bluetooth Printer	30,000 Sets / Month	20,000 Sets
✓	Barcode Scanner	40,000 Sets / Month	20,000 Sets
✓	POS Machine	5,000 Sets / Month	10,000 Sets
✓	Magnetic Card Reader and Writer	45,000 Sets / Month	50,000 Sets

✓ Indicates information has been verified onsite by TUV on 2013.7.15

Quality Assurance

OCOM is dedicated to providing most cost-effective products and services with highest quality that will meet customers' satisfaction.



Since the establishment, OCOM has been sticking strictly to the standard and requirements of ISO9001: 2000 in the processes of research, design, manufacturing and services. OCOM's products have passed CE, FCC, TUV, RoHS and other certifications.

We make strictly IQC, IPQC and OQC inspection per industrial standard. All the products must pass 24-48 hours aging test before shipment. Some designated models can have as long as 24 months warranty.

Test Equipments

Verified	Machine Name	Brand & Model No.	Quantity
✓	Ageing Tester	No Information	6
✓	Withstand Voltage Tester	CC2670A	1
✓	Oscilloscope	TBS1102	1


✓	DC Power Supply	PS-305DM	6
✓	Digital Torque Meter	HP100	1
✓	Calliper	GUANGLU	2
✓	Multi-meter	VC890D	7
✓	Test Computer	No Information	13

✓ Indicates information has been verified onsite by TUV on 2013.7.15

Certifications



Packing and Shipment

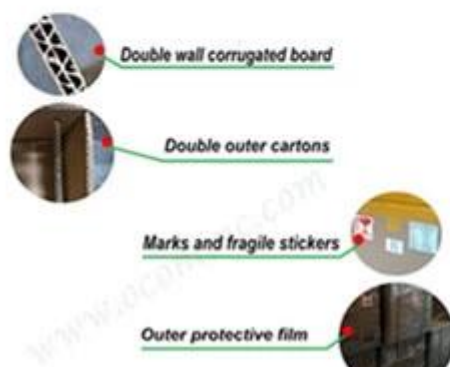

Payment



Customers Reference

Over the years, OCOM keep efforts on marking "OCOM" as an internationally recognized brand, and we have established goods relationship with our customers and have friendly communication with each other.





Why you choose us?



Company Profile



Phoebe Hong



OCOM Technologies Limited

Add: 4/F, Block10, Zhongxing Industrial Park, Chuangye Road, Nanshan District, Shenzhen 518054, China

Tel: 0086.755.8605.3207 ext 807

Fax: 0086.755.8605.3207 ext 868

Web: www.ocominc.com

E-mail: sales07@ocominc.com, sales07@ocomtech.com.cn

Skype: [ocomsales07](https://www.skype.com/people/ocomsales07); **MSN:** ocomsales07@hotmail.com

Ali TM: [cn1000542707](https://www.ali.com/item/cn1000542707); **QQ:** 3152989359

Mobile/Wechat/Whatsapp: 0086.189 4877 8596



Reliable One-Stop Supplier for POS and Auto-ID Related Products