

## 2 cale Poz Auto-frezDrukarka pokwitowań (Model: OCPP-58C)

### Specyfikacja:

Metoda drukowania	Druk termiczny
Gęstości druku	384dots / linia
Wielkość znaków	ANK, Czcionka A: 12x24dots B czcionki: 9x17dots Uproszczony / chiński tradycyjny: 24x24dots
Kod kreskowy	UPC-A / UPC-E / JAN13 (EAN13) / JAN8 (EAN8) / CODABAR / ITF / CODE39 / CODE93 / CODE128
Berło	Równoległe / szeregowo / USB / LAN
Zasilacz	DC 12V 2.6A ==
Szuflada kasowa	DC 12V == 1A
Głowica drukująca życia	50 km
Warunki pracy	Temperatura (0 ~ 45 ° C), wilgotność (10 ~ 80%)
Warunki przechowywania	Temperatur (-10 ~ 60 ° C), wilgotność (10 ~ 90%)
Prędkość druku	120mm / s
Szerokość papieru	57,5±0.5mm
Średnica zewnętrzna papieru	65mm
Grubość papieru	0,06 ~ 0,08 mm
Waga	Waga netto: 1,5 kg, Waga brutto: 2,5 kg
Wymiar	199 * 132 * 111.5mm
Kierowca	Win9X / Win ME / Win2000 / Win2003 / WinNT / Win XP / Windows Vista / Win7 / Win8
Nóż	Auto kuter
Rozkaz	Kompatybilny z EPSON ESC / POS
Interlinia	3.75mm (można zmienić za pomocą polecenia)

### Szczegóły Produktu:



**58mm Thermal Printer  
with Auto-cutter and Big Gear**

**OCPP-58C**



**Product Picture**





## Features

**Simple but not easy**

Fashionable appearance design





Big gear design, superwear resistant



High printing speed up to **120mm/s**  
for text or image



Support multiple languages

Long life, printing head life: 50KM



## All-round show





## Application Area

Food delivery, restaurant, Traffic Citation,  
Logistics, Transportation, Warehouse management,  
Delivery, Illegal Parking Ticket, Drugstore,  
Price Tag, Retail/Farm



## Printer

## Parameter

Print method	Direct thermal
Print density	384dots/line
Character size	ANK, Font A: 12x24dots Font B: 9x17dots Simplified/traditional Chinese: 24x24dots
Bar code	UPC-A/UPC-E/JAN13(EAN13)/JAN8(EAN8)/CODABAR/ITF/CODE39/CODE93/CODE128
Interface	Parallel/Serial/USB/LAN
Power supply	DC 12V==2.6A
Cash drawer	DC 12V==1A
Printing head lifetime	50 kilometers
Operating Conditions	Temperature (0~45 Deg C), humidity (10~80%)
Storage Conditions	Temperature (-10~60 Deg C), humidity (10~90%)
Print speed	120mm/s
Paper width	57.5±0.5mm
Paper	

external diameter	65mm
Paper thickness	0.06~0.08mm
Weight	Net weight: 1.5KG, Gross weight: 2.5kg
Dimension	199*132*111.5mm
Driver	Win9X/Win ME/Win2000/Win2003/WinNT/Win XP/Win Vista/Win7/ Win8
Cutter	Auto cutter
Command	Compatible with EPSON ESC/POS
Line Spacing	3.75mm(Can change through command)



## Paper Roll Installation



- A Open the printer cover.
- B Install the roller in the roll paper, and put them into the printer.
- C Pull out some paper outside the printer and then close the printer cover.
- D Close the top cover. Press the printer cover to avoid error position of roll paper.



## Connection

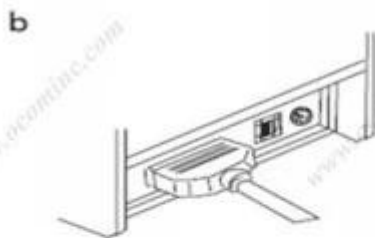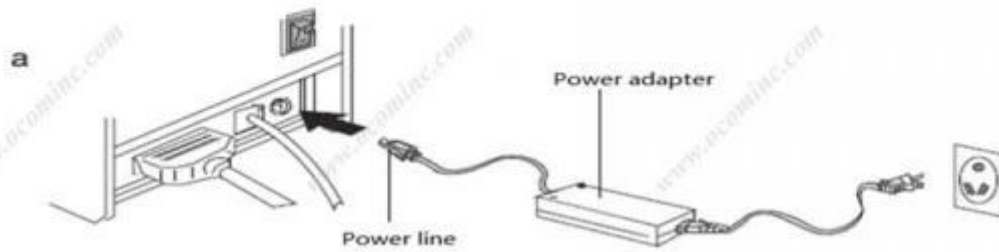

- a. Plug the DC cord connector into the printer's power connector..
- b. Plug the data cable connector into the printer's interface connector.
- c. Plug the drawer cable into the drawer kick-out connector on the back of the printer next to the interface connector.

## Shipping and payment

1. Air, Sea, Express(DHL, FedEx, UPS, EMS, TNT and so on)
2. EXPRESS: around 3-7 working days to arrive
3. INTERNATIONAL AIR MAIL: usually around 2-4 days to arrive, will also depend on which destination port
4. By sea: depend on which destination port
5. T/T
6. Western Union
7. Escrow

## Company Profile



OCOM Technologies Limited is a professional supplier specialized in POS and Auto-ID applications. Our products portfolio covers Barcode Scanner, Barcode Printer, Thermal Printer, Dot Matrix Printer, Magnetic Card Reader, Data Collector, POS Terminal, and other IOT products.



We have FCC, CE, RoHS, and other certifications. We have sell our products to West Europe, North American, Africa, Asia-Pacific and other countries.

OCOM has professional teams including marketing, R&D, quality control, production and sales service. All of the sales representatives have 3 to 10 years experience in international trading, which help us to meet the customers' needs.

OCOM have been sticking to the quality system of ISO9001:2008. We conduct strict IQC, IPQC and OQC inspection in every industrial procedure. Based on our strong capacity, the normal lead time for main products is about 3 to 7 days even for bulk order.

You can find more information of us at: [www.ocominc.com](http://www.ocominc.com), Together we quest for the best.



## **Stosowne dokumenty:**

[\\*Specyfikacja](#)

[\\*Adres IP Konfiguracja ręczna](#)

[\\*Instrukcja obsługi](#)

[\\* Dla wszystkich sterowników systemu Windows](#)

[\\*Sterownik dla systemu Linux](#)

[\\*Parametry drukarki Ustawianie Narzędzia](#)

[\\*Płyta CD Akta](#)