

AndroidW oparciu PDA przemysłowe

(Model No.:OCBS-D8000)

Cecha:

Android5.1 System operacyjny;

2G RAM, 16G ROM, karta TF może się to32 GB;

ARM Cortex-A53 64bit Quad-Core 1.3GHz;

Pomoc 4G LTE i 3G WCDMA;

GPS pozycjonowania satelitarnego A-GPS;

Hd 8 milionów pikseli, z diodą LED, automatyczna regulacja ostrości;

karty SIM, karty PSAM, Micro SD (TF) karty Rozwiń portu;

Akumulator litowo-polimerowy akumulator 3.7V 4000mAh opcji;

Kolor 4,0 cala QVGA odtwórczy szklany ekran dotykowy trwałe;

Szczelny Środowisko: IP65;

6 strony mogą ponosić skutki spadku do 1,5 m od podłogi cementu.

Specyfikacja:

Parametry fizyczne	
Rozmiar	152mm (L) x 77mm (H) x 29mm (szer)
waga	<500g
Ekran wyświetlający	Kolor 4,0 cala QVGA odtwórczy szklany ekran dotykowy trwałe TFT-LCD, 650000 kolory, 480 * 800 (rozmiar QVGA) Jasność można regulować podświetlenie LED
Rozwiń Port	karty SIM, karty PSAM, Micro SD (TF) karty
Interfejs komunikacyjny	USB2.0 Urządzenie, RS-232 (opcja)
Tryb wejścia	Standardowe Stylus, pisma ręcznego, dotykając wejście wejście lub klawiatury
Pojemność baterii	Akumulator litowo-polimerowa bateria 4000mAh 3.7V Opcjonalne
Częstotliwość	głośnik 8Ω1W
Klawisz	29pcs klawisz funkcyjny krzemu
wydajność Parametr	
CPU	ARM Cortex-A53 64bit Quad-Core, 1.3GHz
Baran	2G RAM
Flash ROM	Standardowe 16G NAND Flash Storage Micro SD / TF portu (max do 32G)
Komunikacja komputerowa	
WI-FI	Wsparcie protokołu IEEE802.11b / g, to potrzebują skutecznej sygnалу sieci bezprzewodowej pokrywa

FDD-LTE	Uplink: 1920MHZ-1980MHZ; Downlink: 2110MHZ-2170MHZ Uplink: 1710MHZ-1785MHZ; Downlink: 1805MHZ-1880MHZ Uplink: 2496MHZ-2690MHZ; Downlink: 2496MHZ-2690MHZ
WCDMA / GSM	WCDMA: Uplink: 1850MHZ-1910MHZ; Downlink: 1930MHZ-1990MHZ Uplink układu: 880MHz-915MHz; Downlink: 925MHZ-960MHZ GSM: 850MHz, Uplink: 824MHZ-849MHZ; Downlink: 869MHZ-894MHZ 900MHz, Uplink układu: 880MHz-915MHz; Downlink: 925MHZ-960MHZ 1800MHz, Uplink: 1710MHZ-1785MHZ; Downlink: 1805MHZ-1880MHZ 1900MHz, Uplink: 1850MHZ-1910MHZ; Downlink: 1930MHZ-1990MHZ
Bluetooth	Pomoc Bluetooth 2.0 + EDR, odległość transmisji jest 5-10m
Środowisko działania	
temperatura robocza	-20 °C do 50 °C
Temperatura przechowywania	-25 °C do 70 °C
Środowisko Wilgotność	5% RH - 95% RH (bez kondensacji)
Dane wypadania	6 strony mogą ponosić skutki spadku od 1.5m do betonowej podłozie w przedziale temperatury roboczej
Dane zwijane	1000 razy / 0.5m, rolki na 6 stron powierzchni styku
uszczelnionym	IP65
Środowisko programistyczne	
System operacyjny	Android5.1
SDK	zestaw do tworzenia oprogramowania wyłącznie korzystanie
obsługiwane Język	JAWA
narzędzia rozwojowego	Zaćmienie
Jedno-wymiarowych kodów kreskowych zebrać	
Jednowymiarowe skanery CCD	symbol SE655
Rozkład	5Mil minimalna szerokość
Światła otoczenia	0ft.candles-10000ft.candles
Szybkość skanowania	50 / s
Kąt skanowania	53° ± 3°
Rodzaj wsparcia kodów kreskowych	UPC / EAN, Bookland EAN, Code 128, Code39, Code 93, Code 11, Interleaved 2 z 5, Discrete 2 of 5, Chinese 2 of5, Matrix 2 of 5, Odwrotny 1D, MSI, GS1 DataBar, etc.
Jednowymiarowy skaner laserowy	Mingde966 Standard, Symbol 955, HoneywellN4313 (opcjonalnej)
Rozkład	4mil minimalna szerokość
Światła otoczenia	10000ft.candles (107640 lux)
Szybkość skanowania	104 (±) 12 / s (bothway)
Kąt skanowania	47° ± 35° (Standard) / 35° ± 3° (wąski kąt)
Rodzaj wsparcia kodów kreskowych	UPC / EAN, Code128, Code39, Code93, Code11, Interleaved 2 of 5, Discrete 2 z 5, Chinese 2 z 5, Codabar, MSI, RSS
Dwuwymiarowy kod kreskowy nabyć	
Skaner CMOS	Newland 3096 Standard, HONEYWELL N3680 do opcjonalnej
Uchwata Sensor	752 (poziom) x 480 (pionowo) Pels (poziom szarości)
Światła otoczenia	Wszystkie ciemne 9000ft.candles / 96900 luks
Skupienie element (VLD)	655nm ± 10nm
Pomoc typu kodu kreskowego	PDF417, MicroPDF417, Composite, RSS, TLC-39, Datamatrix, QR Code, Micro QR Code, Aztec, Maxicode; Kody pocztowe: US Postnet, Planet US, UK pocztowe, Australijskie pocztowy, JapanPostal Holenderski pocztowy (KIX) 3
RFID	
LF	125K; ISO11784 / protokołu ISO11785

HF	13.56MHz; ISO14443A / B protokół
Aparat fotograficzny	Hd 8 milionów pikseli, z diodą LED, automatyczna regulacja ostrości
GPS	Wspieranie A-GPS



Android Based Industrial PDA

OCBS-D8000




Product Picture



Features

Reliable with good price

**Android 5.1 Operating System;
Color 4.0 inch QVGA imitative glass
durable touch screen;**

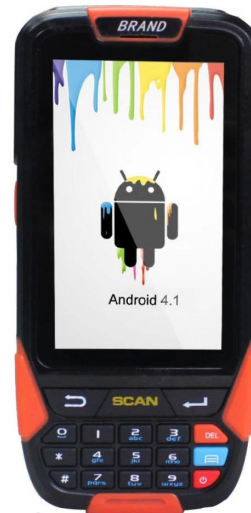

**Support 1D or 2D barcode scanning
Support wifi and bluetooth**

**FDD-LTE.WCDMA,GSM Support
A-GPS satellite positioning optipn
ARM Cortex-A53 64bit?Quad-Core 1.3GHZ**





Hd 8million pixels,with LED,
automatic focusing;
RFID Reader and writer optional

PSAM Card SIM Card, Micro SD(TF)Card Expand Port
3.7V 4000mAh Rechargeable Li-Polymer
Battery.



Sealed Environment:IP65;
6 side can bear impact from
1.5m drop to cement floor.



Application place



Bookstore



Supermarket



Pharmacy



Warehouse



Logistics



Restaurant

Parameter

Physical Parameter	
Size	152mm(L)×77mm(H)×29mm(W)
Weight	<500g
Display Screen	Color 4.0 inch QVGA imitative glass durable touch screen TFT-LCD, 650000 colors, 480*800 (QVGA size) The brightness of LED Backlight is adjustable
Expand Port	SIM card, , Micro SD (TF) Card
Communication Interface	USB2.0 Device,
Input Mode	Standard Stylus, Handwriting, touching input or keyboard input
Battery Capacity	Rechargeable Li-polymer Battery 3.7V 4000mAh Optional
Performance Parameter	
CPU	ARM Cortex-A53 64bit Quad-Core 1.3G
RAM	2G RAM
Flash ROM	Standard 16G NAND Flash Storage Micro SD/TF port (Max up to 32G)
Data Communication	
WI-FI	Support IEEE802.11b/g/n protocol, it need effective wireless LAN signal cover
FDD-LTE	Uplink: 1920MHZ-1980MHZ; Downlink: 2110MHZ-2170MHZ Uplink: 1710MHZ-1785MHZ; Downlink: 1805MHZ-1880MHZ Uplink: 2496MHZ-2690MHZ; Downlink: 2496MHZ-2690MHZ
WCDMA /GSM	WCDMA: Uplink:1850MHZ-1910MHZ; Downlink: 1930MHZ-1990MHZ Uplink:880MHZ-915MHZ; Downlink: 925MHZ-960MHZ GSM: 850MHZ, Uplink:824MHZ-849MHZ; Downlink: 869MHZ-894MHZ 900MHZ, Uplink:880MHZ-915MHZ; Downlink: 925MHZ-960MHZ 1800MHZ,Uplink:1710MHZ-1785MHZ; Downlink: 1805MHZ-1880MHZ 1900MHZ ,Uplink:1850MHZ-1910MHZ; Downlink: 1930MHZ-1990MHZ
Bluetooth	Support Bluetooth 2.0+EDR/3.0+HS/4.1+HS, transmission distance is 5-10m
Operating Environment	
Operating Temperature	-20C to 50C
Storage	-25C to 70C

Production Capacity:

✓ Indicates information has been verified onsite by a certification specialist

Production Capacity

Verified	Product Name	Production Line Capacity	Actual Units Produced(Previous Year)
✓	Thermal Printer	40,000 Sets / Month	250,000 Sets
✓	Dot Matrix Printer	15,000 Sets / Month	10,000 Sets
✓	Bluetooth Printer	30,000 Sets / Month	20,000 Sets
✓	Barcode Scanner	40,000 Sets / Month	20,000 Sets
✓	POS Machine	5,000 Sets / Month	10,000 Sets
✓	Magnetic Card Reader and Writer	45,000 Sets / Month	50,000 Sets

Verified by TUV on 2013.7.15

Quality Assurance:



OCOM is dedicated to providing most cost-effective products and services with highest quality that will meet customers' satisfaction.

Since the establishment, OCOM has been sticking strictly to the standard and requirements of ISO9001: 2000 in the processes of research, design, manufacturing and services. OCOM's products have passed CE, FCC, TUV, RoHs and other certifications.

We make strictly IQC, IPQC and OQC inspection per industrial standard. All the products must pass 24-48 hours aging test before shipment. Some designated models can have as long as 24 months warranty.

Test Equipments:

✓ Indicates information has been verified onsite by a certification specialist

Test Equipment and Facilities

Verified	Machine Name	Brand & Model No.	Quantity
✓	Ageing Tester	No Information	6
✓	Withstand Voltage Tester	CC2670A	1
✓	Oscilloscope	TBS1102	1
✓	DC Power Supply	PS-305DM	6
✓	Digital Torque Meter	HP100	1
✓	Calliper	GUANGLU	2
✓	Multi-meter	VC890D	7
✓	Test Computer	No Information	13

Verified by TUV on 2013.7.15

Certification:




Warranty and After Sales:



- ▶ All products' warranty are not less than 12 month, some models even up to 24 months warranty.
- ▶ Spare parts will be provided for mass orders for customers' local maintenance.
- ▶ Any product found to be defective within 30 days of shipment shall be deemed Dead on Arrival (DOA). DOA products will be advance replaced and shipped via express.
- ▶ Have distributors or authorized agents in the main market who can provide local repair and replacement services.
- ▶ Professional CRM management insures fast respond for customer's enquiries and orders tracking.
- ▶ Sales with many years experience in foreign trade, proficient in foreign languages and strong sense of responsibility.
- ▶ 7*24 hours online, responds with 12 hours in working days, and within 24 hours for rest days.

Packing and Shipment:

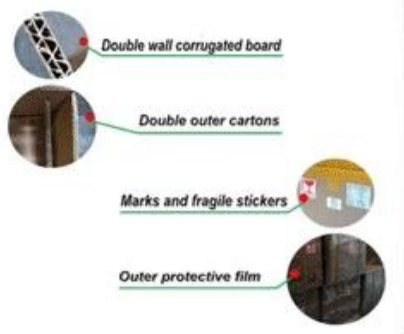

Payment:



secure payment



Customers Reference

Over the years, OCOM keep efforts on marking "OCOM" as an internationally recognized brand, and we have established goods relationship with our customers and have friendly communication with each other.



Company Profile

TRADE ASSURANCE \$

- 100% money refund for Late shipment & Quality problem
- Guarantee on-time delivery
- Third-party pre-shipment quality inspection (Optional)
- No transaction commission charged
- The HIGHEST assurance amount guaranteed by alibaba in the Auto-ID and POS industry .



OCOM Technologies Limited is a professional supplier specialized in POS and Auto-ID applications. Our products portfolio covers , Thermal Printer, Barcode printer, Dot Matrix Printer, Barcode Scanner, Magnetic Card Reader, Data Collector, POS Terminal, and other IOT products.



We have FCC, CE, RoHS, and other certifications. We have sell our products to West Europe, North American, Africa, Asia-Pacific and other countries.

OCOM has professional teams including marketing, R&D, quality control, production and sales service. All of the sales representatives have 3 to 10 years experience in international trading, which help us to meet the customers' needs.

OCOM have been sticking to the quality system of ISO9001:2008. We conduct strict IQC, IPQC and OQC inspection in every industrial procedure. Based on our strong capacity, the normal lead time for main products is about 3 to 7 days even for bulk order.

You can find more information of us at: www.ocominc.com, Together we quest for the best.



Why you choose us?



Contact us

Any queries, please contact us immediately, big surprise is waiting for you.

Sales Center:

Address: Unit701, Block 14, Zhongxing Industrial Park, Chuangye Road, Nanshan District, Shenzhen 518054, China

Website: www.ocominc.com www.possolution.com.cn;

E-mail: ocom@ocominc.com, info@possolution.com.cn ;

Tel: +86.755.86053207 ext 800;

Fax: +86.755.86053207 ext 868;

QQ: 2485890637, 190852203;

Wechat: szocominc, hj34924238;

Whatsapp: 008613352932860;



Wymagane dokumenty:

*[OCBS CD-D8000](#)

